



Cat No -NL 1492-150

CATEGORY :

Type : Ceiling Surface Down Light

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
 Finish : White /Black /Silver Grey
 (Other Color Available On Request)
 Protection : IP20

DIMENSION :

Diameter : Ø40mm
 Depth : 150mm

OPTICAL SYSTEM

Type : Reflector
 Beam Angle : Narrow, Medium
 Beam Direction : Fixed
 Tilt : No
 Swivel : No
 Efficiency : High Efficiency
 Material : PC

CONTROL

Switching
 Dimming
 Non Dimmable

ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz
 Constant Current



Input Power : 9W
 Output Power : 8W
 Power Factor : >0.9
 THD : <15%
 Control Gear : Remote Along With Fixture

LED DETAIL :

Light Source Type : COB
 Light Source Make : Citizen | Samsung
 Wattage : 8W
 Driving Current : 40V-175ma
 Color Temp : 3000K, 4000K, 6000K CCT
 Color Rendering Index (CRI) : >80
 Lumen : 3K(840lm), 4K(865lm), 6K(890lm)
 Efficacy : 105lm/W
 LED Life : 40,000 Hrs.

APPLICATIONS :

- Showrooms
- Offices
- Residences
- Hotels

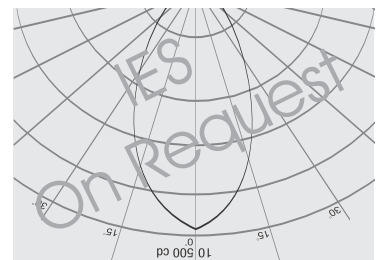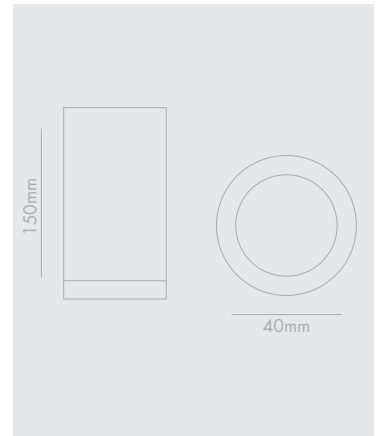

Project Detail : _____

Ref : _____

Date : _____

Rev : _____





Cat No -NL 1492-200

CATEGORY :

Type : Ceiling Surface Down Light

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
 Finish : White /Black /Silver Grey
 (Other Color Available On Request)
 Protection : IP20

DIMENSION :

Diameter : Ø40mm
 Depth : 200mm

OPTICAL SYSTEM

Type : Reflector
 Beam Angle : Narrow, Medium
 Beam Direction : Fixed
 Tilt : No
 Swivel : No
 Efficiency : High Efficiency
 Material : PC

CONTROL

Switching
 Dimming
 Non Dimmable

ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz
 Constant Current



Input Power : 9W
 Output Power : 8W
 Power Factor : >0.9
 THD : <15%
 Control Gear : Remote Along With Fixture

LED DETAIL :

Light Source Type : COB
 Light Source Make : Citizen | Samsung
 Wattage : 8W
 Driving Current : 40V-175ma
 Color Temp : 3000K, 4000K, 6000K CCT
 Color Rendering Index (CRI) : >80
 Lumen : 3K(840lm), 4K(865lm), 6K(890lm)
 Efficacy : 105lm/W
 LED Life : 40,000 Hrs.

APPLICATIONS :

- Showrooms
- Offices
- Residences
- Hotels

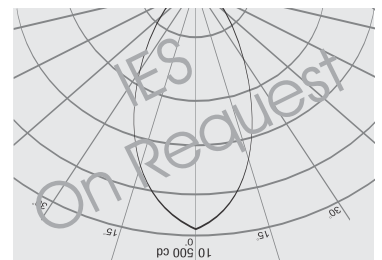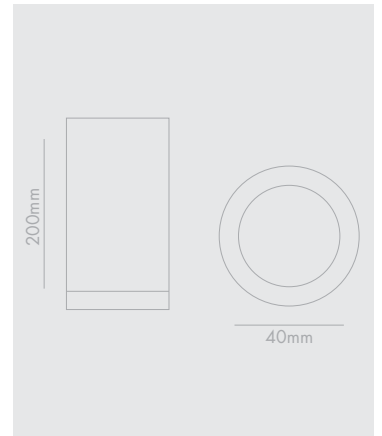

Project Detail : _____

Ref : _____

Date : _____

Rev : _____





CATEGORY :

Type : Ceiling Surface Down Light

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
 Finish : White /Black /Silver Grey
 (Other Color Available On Request)
 Protection : IP20

DIMENSION :

Diameter : Ø40mm
 Depth : 250mm

OPTICAL SYSTEM

Type : Reflector
 Beam Angle : Narrow, Medium
 Beam Direction : Fixed
 Tilt : No
 Swivel : No
 Efficiency : High Efficiency
 Material : PC

CONTROL

Switching
 Dimming
 Non Dimmable

ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz
 Constant Current



Input Power : 9W
 Output Power : 8W
 Power Factor : >0.9
 THD : <15%
 Control Gear : Remote Along With Fixture

LED DETAIL :

Light Source Type : COB
 Light Source Make : Citizen | Samsung
 Wattage : 8W
 Driving Current : 40V-175ma
 Color Temp : 3000K, 4000K, 6000K CCT
 Color Rendering Index (CRI) : >80
 Lumen : 3K(840lm), 4K(865lm), 6K(890lm)
 Efficacy : 105lm/W
 LED Life : 40,000 Hrs.

APPLICATIONS :

- Showrooms
- Offices
- Residences
- Hotels

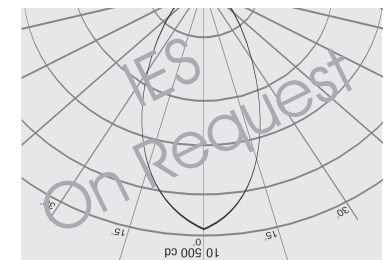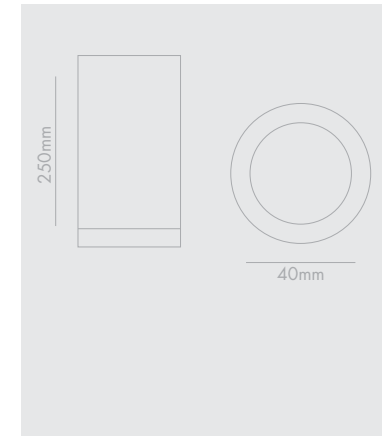


Project Detail : _____

 Ref : _____

 Date : _____

 Rev : _____



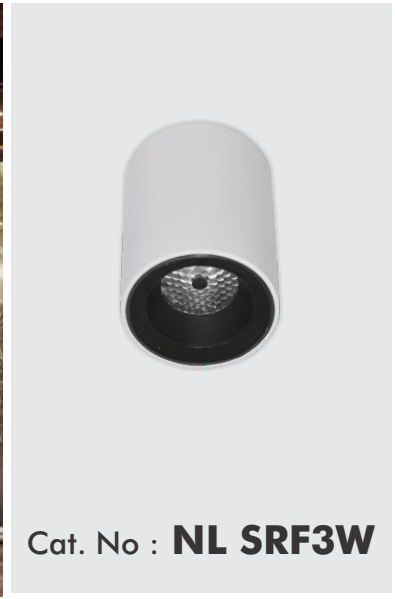

Cat. No : **NL SRF3W**

CATEGORY :

Type : Ceiling Surface Down Light

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
Finish : White
Protection : IP65

DIMENSION :

Diameter : \varnothing 49mm
Depth : 65mm

OPTICAL SYSTEM

Type : Reflector
Beam Angle : Narrow, Medium
Beam Direction : Down
Tilt : No
Swivel : No
Efficiency : High Efficiency
Material : PC

CONTROL

Switching
Dimming
Non Dimmable

ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz
Constant Current



Input Power : 4W
Output Power : 3W
Power Factor : >0.9
THD : <15%
Control Gear : Integrated

LED DETAIL :

Light Source Type : Hi-Power
Light Source Make : Cree
Wattage : 3W
Color Temp : 3000K, 4000K, 6000K CCT
Color Rendering Index (CRI) : >80
Lumen : 315lm
Efficacy : 105lm/W
LED Life : 40,000 Hrs.

APPLICATIONS :

- Showrooms
- Offices
- Residences
- Hotels

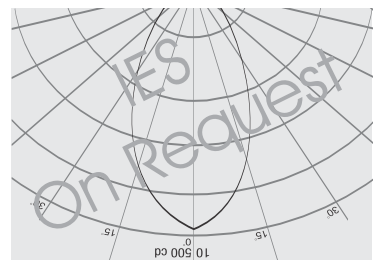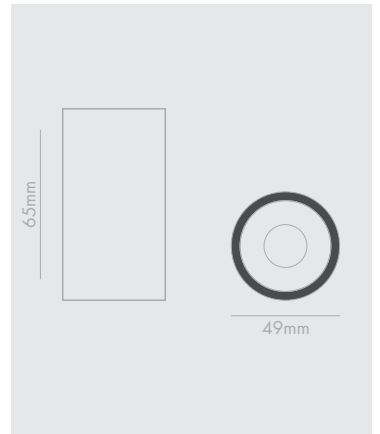

Project Detail : _____

Ref : _____

Date : 21-Dec-2018

Rev : _____

