



Cat. No : **NL 0392**

CATEGORY :

Type : Ceiling Recessed Adjustable Down Light .

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast .
Finish : White (Other Colors Available On Request)
Protection : IP20 .

DIMENSION :

Diameter : Ø137mm .
Cut Out : Ø125mm .
Depth : 126mm

OPTICAL SYSTEM

Type : Lens & Reflector .
Beam Angle : Narrow, Medium, Wide
Beam Direction : Fixed
Tilt : 25°
Swivel : No
Efficiency : ***
Material : PC .

CONTROL

Switching
Dimming :
1-10 Analog
0-10 Analog
DSI
Dali
Triac
Leading & Trailing

ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz
Constant Current


Input Power : 35W .
Output Power : 32W .
Power Factor : >0.99 .
THD : <10% .
Control Gear : Remote Along With Fixture .

LED DETAIL :

Light Source Type : COB .
Light Source Make : Citizen V6 | Samsung .
Wattage : 32W | 25W .
Driving Current : 40V-800ma .
Color Temp : 3000K, 4000K, 6000K CCT .
Color Round Index (CRI) : >90 .
Lumen : 32W - 3K(3680lm), 4K(3790lm), 6K(3909lm) .
25W - 3K(2875lm) | 4K(2961lm) | 6K(3050lm) .
Efficacy : 115lm/w .
LED Life : 40,000 Hrs .

APPLICATIONS :

- Shopping malls,
- Restaurants,
- Hotel lobbies / Waiting areas,
- Modern gyms / Spa,
- Corporate offices .

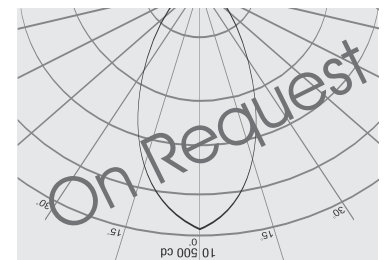

Project Detail : _____

Ref : _____

Date : _____

Rev : _____

