



Cat. No : **NL 1183**

CATEGORY :

Type : Ceiling Recessed Adjustable Down Light

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
Finish : White (Other Color Available On Request)
Protection : IP20

DIMENSION :

Diameter : 115mm
Cut Out : Ø105mm
Depth : 130mm

OPTICAL SYSTEM

Type : Reflector
Beam Angle : Narrow, Medium, Wide
Beam Direction : Fixed
Tilt : No
Swivel : No
Efficiency : High
Material : PC

CONTROL

Switching
Dimming :
1-10 Analog
0-10 Analog
DSI
Dali
Triac
Leading & Trailing

ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz
Constant Current

Input Power : 21W
Output Power : 20W
Power Factor : >0.96
THD : <15%
Control Gear : Remote Along With Fixture


LED DETAIL :

Light Source Type : COB
Light Source Make : Citizen | Samsung
Wattage : 20W
Driving Current : 40V-500ma
Color Temp : 3000K, 4000K, 6000K CCT
Color Rendering Index (CRI) : >80
Lumen : 3K(2200lm), 4K(2266lm), 6K(2339lm)
Efficacy : 110lm/W
LED Life : 40,000 Hrs.

APPLICATIONS :


- Malls
- Offices
- Residences
- Hotels

105MM



130MM

115MM

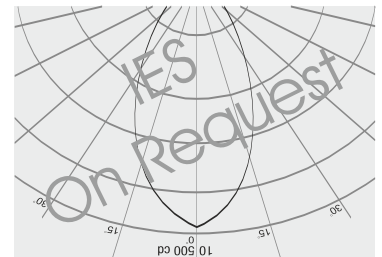

Project Detail : _____

Ref : _____

Date : _____

Rev : _____

