



Cat. No : **NL 1422**

CATEGORY :

Type : Ceiling Recessed Fixed Mini Strike Light

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast

Finish : White

Protection : IP20

DIMENSION :

Diameter : 108x32mm

Cut Out : 104x28mm

Depth : 40mm

OPTICAL SYSTEM

Type : Lens

Beam Angle : Medium

Beam Direction : Fixed

Tilt : No

Swivel : No

Efficiency : High

Material : PC

CONTROL

Switching

Dimming :

1-10 Analog

0-10 Analog

DSI

Dali

Triac

Leading & Trailing

ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz
Constant Current

Input Power : 13W

Output Power : 12W

Power Factor : >0.9

Surge Protection : 2.5kv

THD : <15%

Control Gear : BIS Approved - Nirvana Make

LED DETAIL :

Light Source Type : Hi-Power

Light Source Make : Cree

Wattage : 12W

Driving Current : 20V-700ma

Color Temp : 3000K, 4000K, 6000K CCT

Color Rendering Index (CRI) : >80



Lumen : 1176lm

Efficacy : 98lm/W

LED Life : 40,000 Hrs.

APPLICATIONS :

- Showrooms
- Offices
- Residences
- Hotels
- Bar

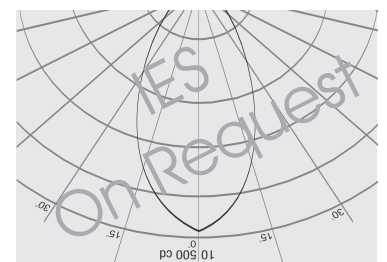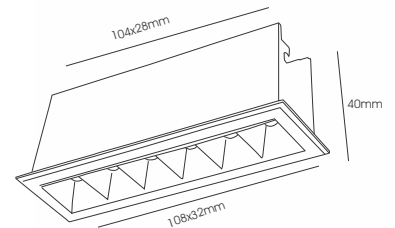

Project Detail : _____

Ref : _____

Date : _____

Rev : _____

