

Cat. No : **NL 1424**

CATEGORY :

Type : Ceiling Recessed Fixed Strike Light

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
Finish : White
Protection : IP20

DIMENSION :

Diameter : 54x54mm
Cut Out : 49x49mm
Depth : 50mm

OPTICAL SYSTEM

Type : Lens
Beam Angle : Medium
Beam Direction : Fixed
Tilt : No
Swivel : No
Efficiency : High
Material : PC

CONTROL

Switching
Dimming Option :
1-10 Analog
0-10 Analog
DSI
DALI
Triac
Leading & Trailing

ELECTRICAL PARAMETER / CHARACTERISTIC :

Driver Input Voltage : 100-240V AC 50/60Hz
Constant Current



Input Power : 7W
Output Power : 6W
Power Factor : >0.95
THD : <12%
Control Gear : Remote Along With Fixture

LED DETAIL :

Light Source Type : Hi-Power
Light Source Make : Cree
Wattage : 6W
Driving Current :
Color Temp : 3000K, 4000K CCT
Color Rendering Index (CRI) : >80
Lumen : 630lm
Efficacy : 105lm/W
LED Life : 40,000 Hrs.

APPLICATIONS :

- Showrooms
- Offices
- Residences
- Hotels

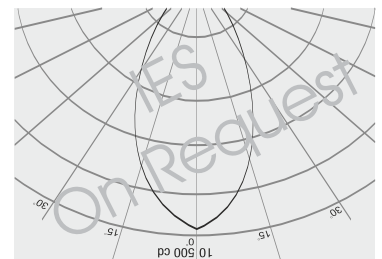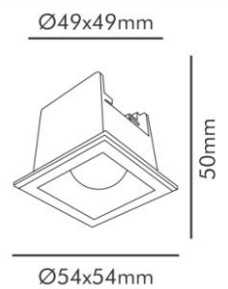

Project Detail : _____

Ref : _____

Date : _____

Rev : _____

