



Cat. No. : **NL 1430**

OPTICAL SYSTEM

Type : Lens
Beam Angle :
Beam Direction : Fixed
Tilt : High
Swivel : No
Efficiency : High
Material : PC

CONTROL

Switching
Dimming :
1-10 Analog
0-10 Analog
Dsi
Dali
Triac
Leading & Trailing

DIMENSION :

Dia : 82x82mm
Height : 80mm

PRODUCT CONSTRUCTION :

Housing : Aluminum Die Cast
Finish : White (Other Colors Available On Request)
Protection : IP20

ELECTRICAL PARAMETER / CHARACTERISTIC :



Driver Input Voltage : 100-240V AC 50/60Hz
Constant Current
Input Power : 36W
Output Power : 35W
Power Factor : >0.90
THD : <15%
Control Gear : Remote Along With Fixture

LED DETAIL :

Light Source Type : Hi-Power
Light Source Make :
Wattage : 35W
Driving Current :
Color Temp : 3000K | 4000K | 6000K CCT
Color Rendering Index (CRI) : >80
Lumen : 3K(3850lm) | 4K (3965lm) | 6K (4084lm)
Efficacy : 110 | W
LED Life : 40,000 Hrs.

CATEGORY :

Type : Ceiling Recessed Spot Light

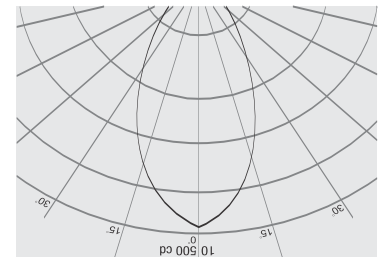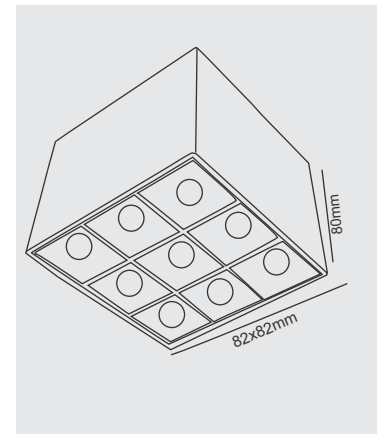

Project Detail : _____

Ref : _____

Date : _____

Rev : _____

