



CATEGORY	Type : Wall Up-Down Light
PRODUCT CONSTRUCTION	Housing : Aluminum Die Cast Finish : Dark Grey Protection : IP65
DIMENSION	Diameter : Ø60mm   Height : 125mm
OPTICAL SYSTEM	Type : Lens Beam Direction : Up & Down   Tilt : No Beam Angle : 10° / 25° Swivel : No Efficiency : High Material : PMMA
CONTROL	Switching Non Dimmable
ELECTRICAL PARAMETER / CHARACTERISTIC	Driver Input Voltage : 100-240V AC 50/60Hz Constant Current Input Power : 2x7W Output Power : 2x6W THD : <12% Power factor : 0.95 Control Gear : Integrated
LED DETAIL	Light Source Type : COB Light Source Make : Bridgelux Wattage : 2x6W Color Temp : 3000K Color Round Index (CRI) : >80 Lumen : 1260lm Efficacy : 105lm/W LED Life : 40,000 Hrs.
APPLICATIONS :	Showrooms   Offices   Reception Area   Hotels   Malls

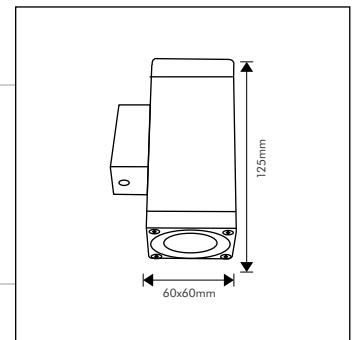

Project Detail: \_\_\_\_\_

Ref.: \_\_\_\_\_

Date : \_\_\_\_\_

Rev : \_\_\_\_\_

LED Collection

