

NIRVANALIGHT®
Enlighten Your Life

Illuminate Your World:
Brightening Spaces
with Innovative
LED Solutions

2024 | CATALOGUE

V1.0

INDOOR & OUTDOOR

About Us

NIRVANA LIGHT[®] a luminaire company established in the year 2011. The company has gradually expanded its operations to an integrated lighting solution provider under one roof. Our quest for innovation and obsession for high quality has made us a leading provider of LED luminaires, providing an extensive range of fittings and fixtures at the most effective cost.

NIRVANA LIGHT[®] employs highly skilled technical staff supported by a team of Designers and Engineers and is backed by a fully equipped workshop entailing the most advanced technology. Thus, it has developed for itself an excellent reputation among leading Architects and Designers across India.

For us a Luminaire is more than a fixture that emits light, it is an epitome of our research and passion for our Innovation.

Light and NIRVANA: Light provides energy to all things in the natural world. Artificial light also creates value by adding beauty and functionality in such human-made environments as architectural spaces, interiors and landscapes. Innovation is our pursuit. Superior quality of light is our insistence. But, what defines NIRVANA is the deep enthusiasm and love for light.

Realize Green: Being environmentally conscious company it influences our entire product development. Our practice from the selection of materials, packaging to light sources reflects our respect for our environment. We at NIRVANA LIGHT[®] are committed to go into the relationship between the properties of light and Earth's environment in order to create an abundant next generation environment by using energy efficiently, rather than resorting to a fundamentally negative energy-saving approach. Our NIRVANA product collections contribute to the sustain ability of our planet thanks to their superior quality and lasting performance.

Internationally Advanced Design: NIRVANA LIGHT[®] is committed to high quality luminaire design & development. Our luminaires are equipped with advanced technology and aesthetic design, which matches Indian customers' demands and designers taste in lighting application.

Creativity, Quality and Elegance: These are the attributes that describe the new collections launched by NIRVANA, the fruits of eight years of hard work and dedication of entire Nirvana Team. Our Designers & Engineers with the support of our consultants have created these state-of-the-art collections by adopting new technology and new materials without sacrificing our core values of Creativity, Quantity and Elegance.

MAKE IN INDIA

Across India, Citizens are connecting with local businesses having manufacturing base in India. Inspired by the Prime Minister's word, we have ingrained the "Make in India" philosophy in our operations. We believe in manufacturing, outsourcing components from local manufacturers and selling the best quality LED lights, thereby, not only earning recognition for our company but also our Motherland - India.



FACTORY



ASSEMBLY AREA



TESTING FACILITY



PU PAINT




POWDER COATING



CNC MACHINE

OUR LED PARTNERS :     

LED DRIVER PARTNERS :       



INDEX INDOOR

Retro Retrofit LED Lamps



Pg. 01-03

Alina Fix Down Lights



Pg. 04-06

Fisa Down Lights



Pg. 07-08

Vario Fixed-Dual Tone



Pg. 09-12

d-Sigo-Adjustable Lights



Pg. 13-16

Move Adjustable Lights



Pg. 17-19

Metallica Spot Lights



Pg. 20-22

Tilto-Deep Recessed
Anti-Glare Chrome



Pg. 23-26

Celestia-Deep Recessed
Anti-glare Chrome



Pg. 27-29

Lune-Wall Washer
Anti-glare Chrome



Pg. 30

Nube -Deep Recessed
Fixed Anti-Glare Chrome



Pg. 31-35

Cirrus-Deep Recesses
Grey Steel Finish



Pg. 36-38

Soothe-Anti-Glare Black



Pg. 39-41

Aqua-IP Series



Pg. 42-44

Dazzle-SMD Down Light



Pg. 45-47

Strike Lineo Light



Pg. 48-51

INDEX INDOOR

Strike Metallic Light



Pg. 52-55

Strike Even Light



Pg. 56-58

Brillo -Anti Glare



Pg. 59-61

Glowman -Anti Glare



Pg. 65-68

Strike Minima 32mm



Pg. 62-64

Strike Maxima 54mm




Pg. 65-68

Strike Circo



Pg. 69-71

Strike Verso

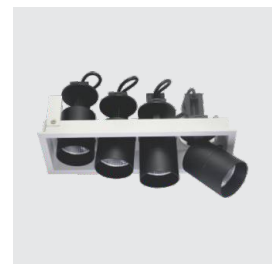

Pg. 72-74

Hido Series-Trimless



Pg. 75-78

Orofi-Surface Light



Pg. 79-83

Optima-Retail Recessed



Pg. 84-87

Twist-Retail Track



Pg. 88-91

Matrix- Suspended Profile



Pg. 92-94

Uniquo-Recessed Profile




Pg. 95-97

Combo Surface & Suspended



Pg. 98-100

Passion Surfaced Profile




Pg. 104-103

Outre-Recessed Profile



Pg. 104-106

Scoop-Suspended Profile

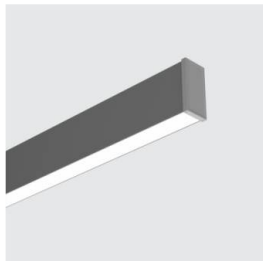


Pg. 107-109

Aspirio-Y/Hexa/Triangle



Pg. 110-112

Cruiser Magnetic + Lockable

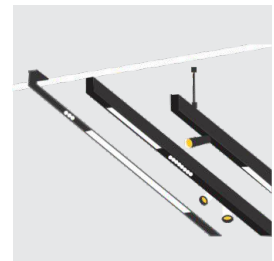

Pg. 113-124

Gardo-Surface & Spike



Pg. 125-128



Pg. 129-130

KUBO-WALL ONE WAY LIGHT



Pg. 129-134




Pg. 135-136

KUBIC-Wall Up Down Light



Pg. 137-144



Pg. 137-144

OKIO-Ceiling Surface Light



Pg. 145-148

GUIDE-Ceiling Surface Light



Pg. 149-155



Pg. 149-155

GLEAM SERIES-in-ground Light



Pg. 156-160

LUCIA-floor Washer/Flood Light



Pg. 161-165

LORENZA-Floor Washer/Foot Light



Pg. 166-169

INDEX **OUTDOOR**

NUVO - BOLLARD




Pg. 170-176

TREND - BOLLARD



Pg. 181-186

ADJUSTABLE - BOLLARD




Pg. 181-186

1/2 Ways - BOLLARD




Pg. 187-190

SLIMO - POLE LIGHTS



Pg. 191-199

GLOWSPIRE STICK LIGHTING SYSTEM



Pg. 248-256

MARVELLO - MODERN STREET LIGHT




Pg. 203-210

ATRIA - BOLLARD & POLE



Pg. 211-215

SQUARO- POLE LIGHTS



Pg. 216-221

GALAXY- POST TOP POLES




Pg. 222-225

GALAXY- POST TOP POLES 2



Pg. 226-227

MODERN - STREET LIGHT



Pg. 228-230

MODERN - STREET LIGHT




Pg. 234-237

VERTILUX- BOLLARDS & POLES



Pg. 238-247

FACADE- LIGHTING SYSTEM



Pg. 248-253


FLOOD/STREET- LIGHTING SYSTEM



Pg. 254-256



Indoor Architectural Lighting



10° - 60° Zoom Adjustable Beam

Retrofit LED Lamps Light System

Retro LED Lamps

Light System

Features

Elevate your lighting with our Retro Fit LED Lamp! Designed as a direct replacement for traditional lamps, it boasts excellent energy efficiency and a longer lifespan.

- The housing is constructed from die-cast aluminium for superior thermal management.
- Beam options like Narrow, Medium, Wide available on request
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.




Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification

Model	NL 1010/A	NL 1012/A	NL 1019	NL 1018
Power (W)	11W	13W	11W	15W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	COB	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 50mm H : 58mm	D : 50mm H : 100mm	D : 50mm H : 110mm	D : 50mm H : 91mm

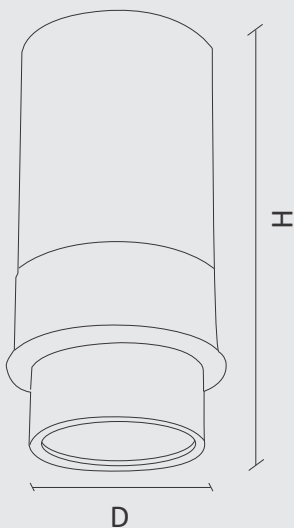

Adjustable Beam



NL 1019



NL 1018



NL 1010/A



NL 1012/A



Indoor
Architectural
Lighting

NIRVANALIGHT[®]
Enlighten Your Life



Alina
Fix Down Lights

Alina

Fixed Down Lights

Features


An invisible touch for a functional minimalism that aims to full and undisturbed fruition of light.

- Slim trim offers feel of minimalistic design.
- Deep recessed to avoid direct glare.
- Simple and neat design.
- Beam options like Narrow, Medium, Wide available on request.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.




Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification

Model	NL 0132	NL 0133	NL 0134	NL 0135	NL 0136
Power (W)	3W/5W	9W	11W	11W/13W/15W	13W/15W/18W/20W
Color Temperature (CCT)	3K, 4K, 6K	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	COB	COB	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT				
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 35mm C : 28mm H : 62mm	D : 60mm C : 52mm H : 84mm	D : 75mm C : 69mm H : 90mm	D : 78mm C : 72mm H : 86mm	D : 92mm C : 83mm H : 108mm

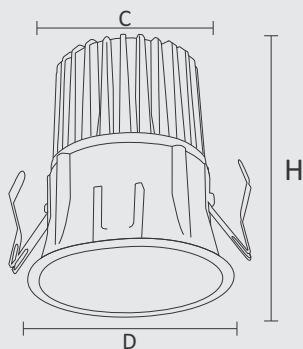

Indoor
Architectural
Lighting



Fisa
Down Lights

Fissa

Fixed Down Lights

Features

Fissa - Deep recessed led ceiling mounted fixed down lights are perfect for uniform and glare-free lighting. The die cast aluminium housing is ideal for better thermal management.

- Slim trim offers feel of minimalistic design.
- Deep recessed to avoid direct glare.
- Simple and neat design.
- Beam options like Narrow, Medium, Wide available on request.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.





Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification

Model	NL 1469	NL 1037L	NL 1031	NL 0135L	NL 1444
Power (W)	13W/15W/18W/20W	11W/13W/15W	11W/13W/15W	11W/13W/15W	12W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K
LED Type	COB	COB	COB	COB	Hi-Power
Housing	Aluminium Die cast	Aluminium Die cast	Aluminium Die cast	Aluminium Die cast	Aluminium Die cast
Finish	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT				
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 105mm C : 100mm H : 129mm	D : 80mm C : 70mm H : 80mm	D : 82mm C : 70mm H : 70mm	D : 78mm C : 72mm H : 86mm	D : 93x93mm C : 87x87mm H : 82mm

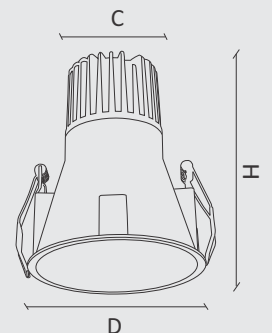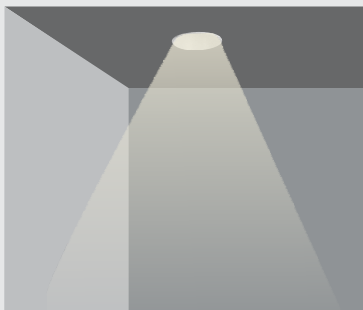



Indoor
Architectural
Lighting



Vario
Fixed-Dual Tone

Vario

Fixed-Dual Tone

Specification

Model	NL 1446-DT	NL 1446A-DT	NL 1456-DT	NL 1456A-DT
Power (W)	11W	11W	11W	11W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	COB	COB	COB	COB
Housing	Aluminium Die cast	Aluminium Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 90mm C : 83mm H : 125mm	D : 90mm C : 83mm H : 125mm	D : 85mm C : 114mm H : 120mm	D : 85mm C : 114mm H : 120mm



NL 1446DT



NL 1446A-DT




NL 1456-DT



NL 1456A-DT

Specification

Model	NL 1037L-DT	NL 0135L-DT	NL 1031-DT
Power (W)	11W/13W/15W	11W/13W/15W	11W/13W/15W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 80mm C : 70mm H : 80mm	D : 78mm C : 72mm H : 86mm	D : 82mm C : 70mm H : 70mm

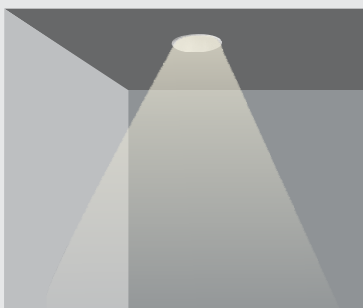


NL 1037L-DT



NL 0135L-DT



NL 1031-DT

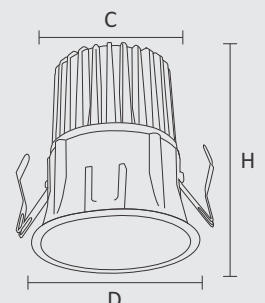

Vario

Fixed-Dual Tone


Features

Vario - Dual Tone Recessed Light can create a home style in a luxury apartment, making each space unique and welcoming.

- Aluminium die cast housing.
- Metallic finish adds glitter to interior.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.



Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries




Specification

Model	NL 0132DT	NL 0133DT	NL 0134DT	NL 0135DT	NL 0136DT
Power (W)	3W/5W	9W	11W	11W/13W/15W	13W/15W/18W/20W
Color Temperature (CCT)	3K, 4K, 6K	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	COB	COB	COB	COB	COB
Housing	Aluminium Die cast	Aluminium Die cast	Aluminium Die cast	Aluminium Die cast	Aluminium Die cast
Finish	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT				
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 35mm C : 28mm H : 62mm	D : 60mm C : 52mm H : 84mm	D : 75mm C : 69mm H : 90mm	D : 78mm C : 72mm H : 86mm	D : 92mm C : 83mm H : 108mm

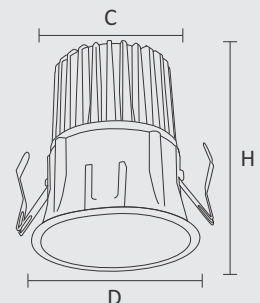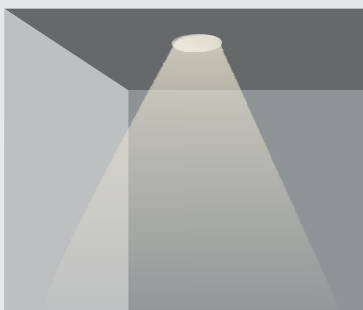



Indoor
Architectural
Lighting

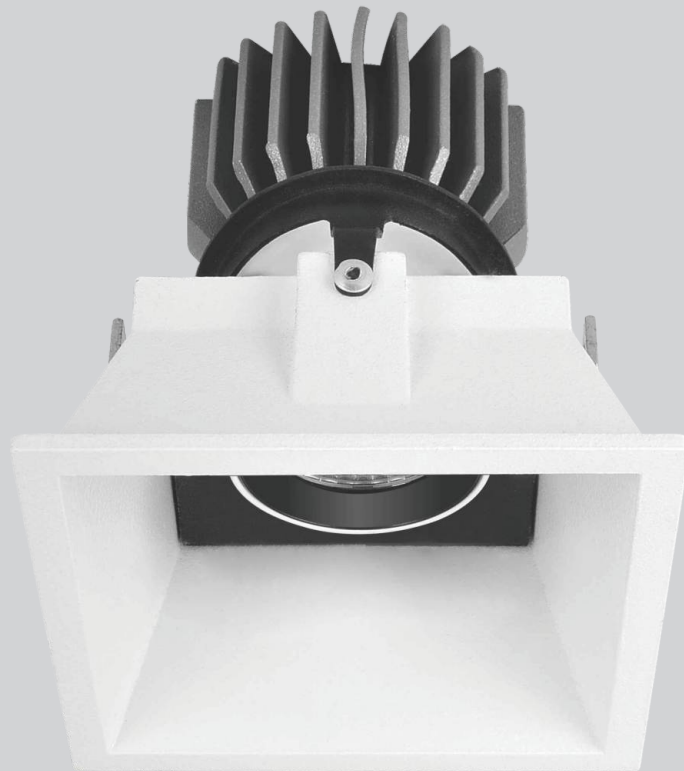

d-Sigo-Adjustable
Light System

d-Signo Adjustable Light System

Features

d-Signo Adjustable Spot Lights are ceiling recessed down lights having option of adjusting direction of the light source wherever needed.

- Aluminium die cast housing.
- Adjustable in all directions, Max tilting 30°, rotation – 360°.
- Deep recessed to avoid glare.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.




Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification

Model	NL 1107	NL 1445	NL 1445A	NL 1446	NL 1446A
Power (W)	3W	13W	13W	13W	13W
Color Temperature (CCT)	3K	3K, 4K, 6K/TW	3K, 4K, 6K/TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	Hi-Power	COB	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT				
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 65mm C : 55mm H : 35mm	D : 93x93mm C : 87x87mm H : 125mm	D : 93x93mm C : 87x87mm H : 125mm	D : 90mm C : 83mm H : 125mm	D : 90mm C : 83mm H : 125mm

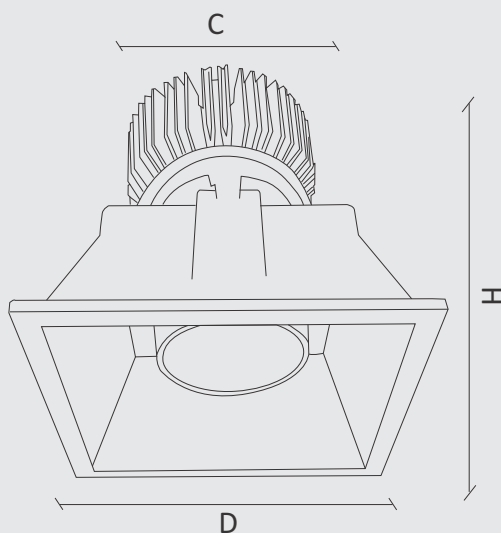

3° Super Narrow Spot




NL 1107

With Snoot



NL 1445

Without Snoot



NL 1445A

With Snoot



NL 1446


Without Snoot



NL 1446A

Specification

Model	NL 1448-S1	NL 1448-S2	NL 1448-S3	NL 1447
Power (W)	8W	11W/13W	15W/20W	10W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	COB	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 76mm C : 55mm H : 38mm	D : 98mm C : 75mm H : 45mm	D : 118mm C : 95mm H : 54mm	D : 90mm C : 83mm H : 51mm

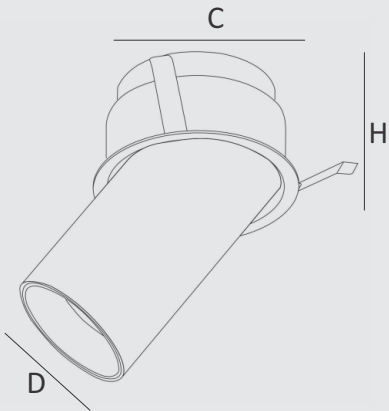

NL 1448-S1



NL 1448-S2




NL 1448-S3



NL 1447



Indoor
Architectural
Lighting

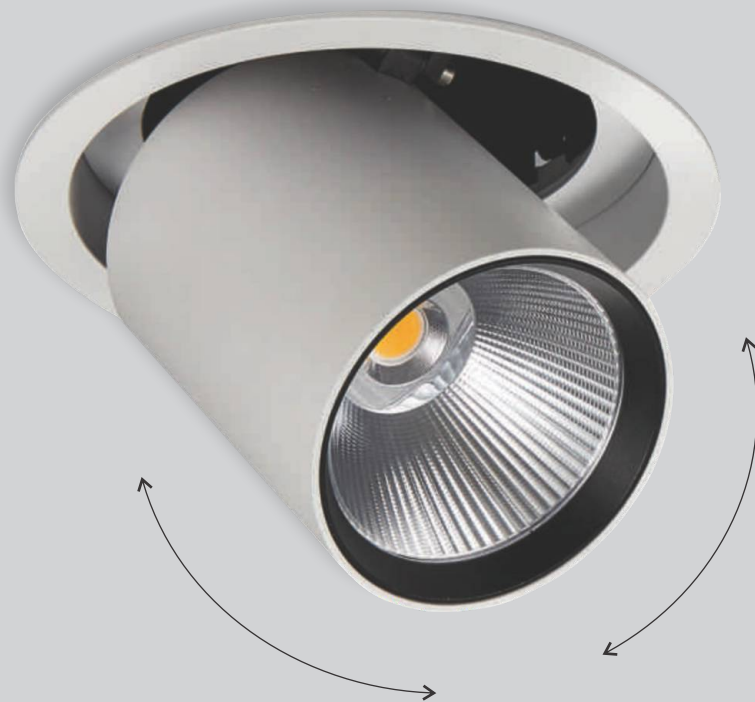

Move
Adjustable
Light System

Move Adjustable Light System

Features

Moove is a family of adjustable downlights which are tiltable as well as rotatable. The luminaire design is such that it can reach maximum horizontal plane or vertical surfaces.

- Aluminium die cast housing.
- Adjustable in all directions, Tilting max 75°, rotation 355°.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.


Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification

Model	NL 1449	NL 1460	NL 1460TL
Power (W)	8W	13W	13W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 84mm C : 75mm H : 90mm	D : 100mm C : 89mm H : 105mm	D : 88mm C : 127mm H : 93mm

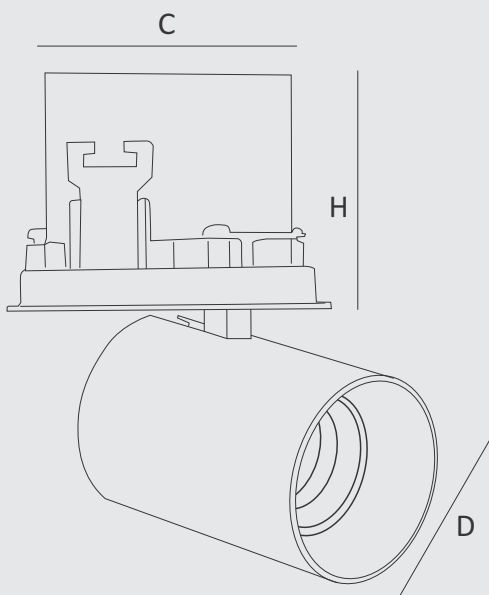




Indoor Architectural Lighting



SILVER CHROME




BLACK CHROME



TRUE COPPER



OLIVE GREEN



Metallica Spot Light System

Metallica

Spot Light System

Features

Metallica is a family of recessed down light with a touch of metallic finish. Available in two trims of 60mm & 78mm, this versatile product offers features like no other series. Luminaire can be perfectly optimized to meet the lighting requirement.

- Aluminium die cast housing.
- Available in 4 Metallic finish like True Copper, Olive Green, Dark Chrome, Silver Chrome.
- Fixed deep recessed spot light.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.



Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery



Specification

Model	NL 0137	NL 0137ADJ	NL 0138	NL 0138ADJ
Power (W)	9W/11W	9W/11W	13W / 15W	13W / 15W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	COB	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60mm C : 52mm H : 84mm	D : 80mm C : 82mm H : 68mm	D : 78mm C : 72mm H : 86mm	D : 97mm C : 87mm H : 85mm





Indoor
Architectural
Lighting



Tilto

Deep Recessed Anti-Glare Chrome

Tilto

Anti-glare Chrome

Features

Changing one's mind is natural. The project of a modular and multifunction lighting can't do without Tilto- Anti-Glare Chrome Ceiling Recessed spot light.

- Aluminium die cast housing.
- Deep recessed spot light with Silver chrome secondary reflector.
- Low cut off angle and reduced glare.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.




Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification

Model	NL 1510	NL 1521 FX	NL 1522 FX	NL 1523 FX
Power (W)	6W	6W	13W	15W/20W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	COB	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60mm C : 54mm H : 80mm	D : 65mm C : 60mm H : 80mm	D : 88mm C : 80mm H : 103mm	D : 110mm C : 100mm H : 122mm

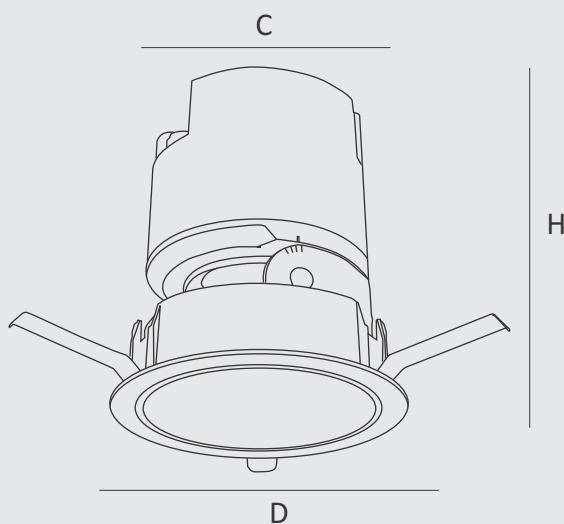

Specification

Model	NL 1521 ADJ	NL 1522 ADJ	NL 1523 ADJ	NL 1521 WW	NL 1522 WW	NL 1523 WW
Power (W)	6W	13W	15W/20W	6W	13W	15W/20W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	COB	COB	COB	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT					
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 65mm C : 60mm H : 84mm	D : 88mm C : 80mm H : 109mm	D : 110mm C : 100mm H : 130mm	D : 65mm C : 60mm H : 80mm	D : 88mm C : 80mm H : 103mm	D : 110mm C : 100mm H : 122mm

Adjustable



NL 1521 ADJ



NL 1522 ADJ



NL 1523 ADJ

Wall-washer



NL 1521 WW




NL 1522 WW



NL 1523 WW



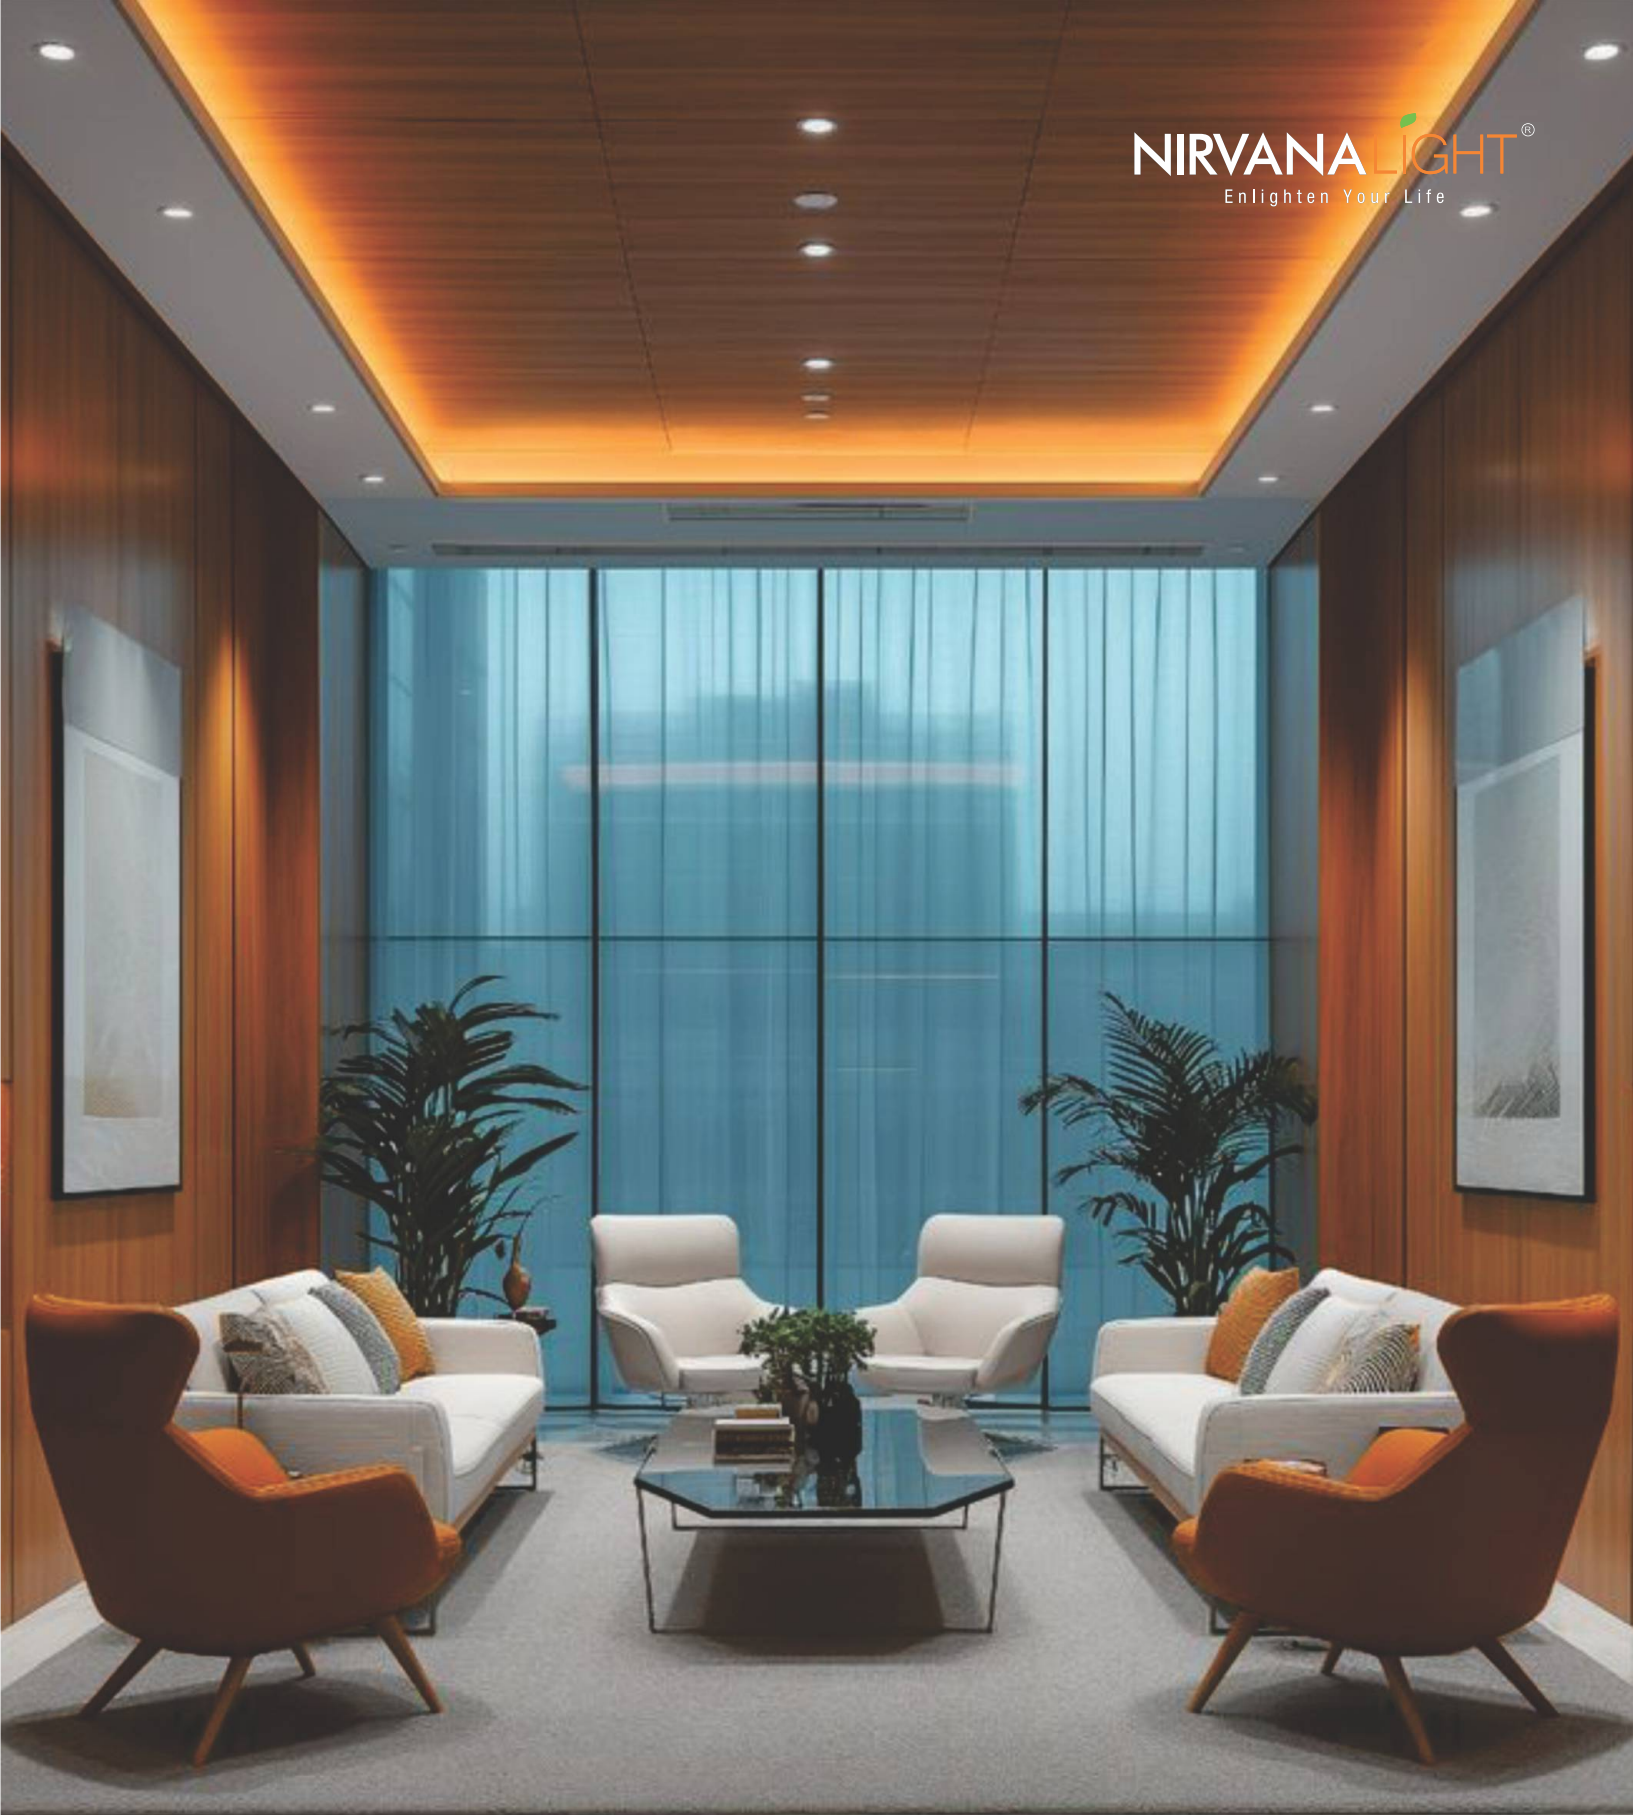

Indoor
Architectural
Lighting



Celestia
Deep Recessed
Anti-glare Chrome

Celestia Deep Recessed Anti-glare Chrome


Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications
- The die-cast aluminum housing ensures efficient heat dissipation.
- Delivering exceptional brightness, these lights provide ample illumination for indoor applications.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.




Applications

- Home
- Malls
- Showrooms
- Offices



Specification

	NL 1542	NL 1543	NL 1544
Model	NL 1542	NL 1543	NL 1544
Power (W)	10W	12W	15W
Color Temperature (CCT)	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Reflector	Reflector	Reflector
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Beam Angle	38°	38°	38°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 65mm H : 61mm C : 55mm	D : 75mm H : 70mm C : 65mm	D : 85mm H : 80mm C : 75mm

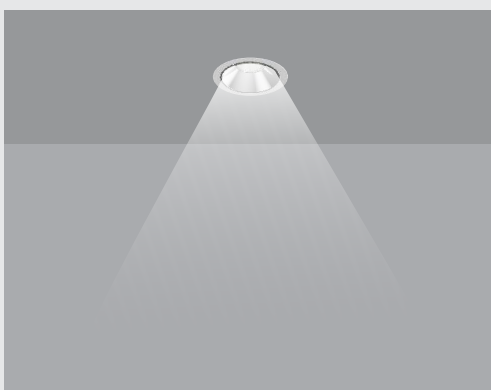

Lune Wall Washer

Anti-glare Chrome

Features

- Recessed lights are specifically designed to effectively illuminate walls, creating a dramatic and visually striking effect.
- The die-cast aluminum housing ensures efficient heat dissipation.
- Delivering exceptional brightness, these lights provide ample illumination for wall washing applications.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.

Applications

- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels






True Wall Washable



Specification

Model	NL 1549
Power (W)	12W
Color Temperature (CCT)	3K/4K/6K
Input Voltage	AC 220V-240V
Optics	Reflector
Housing	Aluminum Die Cast
Finish	White
Color Rendering Index (CRI)	>80
Protection Rating (IP)	IP20
Dimming	Non-Dimmable
Beam Angle	Wall Washer
Life Span (hours)	50,000 Hrs
Size	D : 85mm H : 80mm C : 75mm

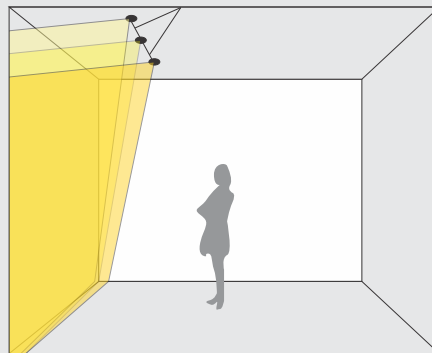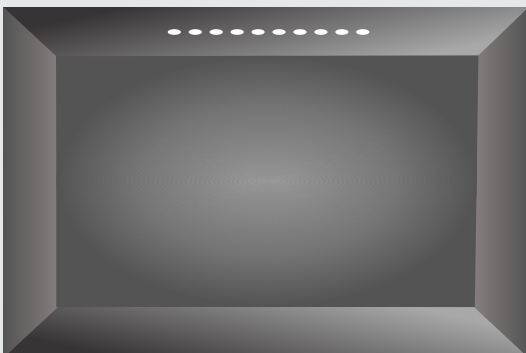




Indoor
Architectural
Lighting

NIRVANALIGHT[®]
Enlighten Your Life



Nube
Deep Recessed Fixed
Anti-glare Chrome

Nube Deep Recessed Fixed Anti-glare Chrome




Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications
- The die-cast aluminum housing ensures efficient heat dissipation.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.
- Tunable white option available over RF or Bluetooth.

Applications

- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels




Specification

Model	NL 1601	NL 1602	NL 1603
Power (W)	8W	11W	15W
Color Temperature (CCT)	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Reflector	Reflector	Reflector
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP44	IP44	IP44
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Beam Angle	55°	55°	55°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 43mm H : 76mm C : 36mm	D : 63mm H : 94mm C : 55mm	D : 83mm H : 94mm C : 55mm




Indoor Architectural Lighting

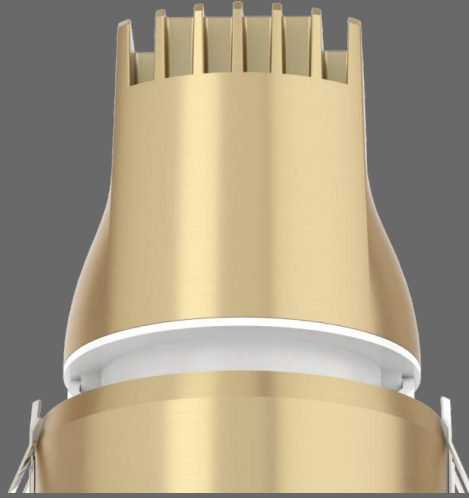


45°
Shielding Angle



30° adjustable angle

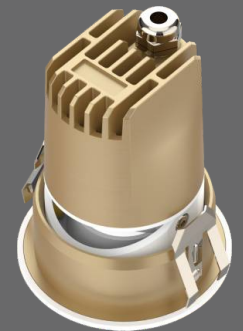

The embedded parts
are adjustable in height



Safe Ceiling attachment

Nube Deep Recessed Adjustable Anti-glare Chrome

Nube

Deep Recessed Adjustable

Anti-glare Chrome

Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications
- The die-cast aluminum housing ensures efficient heat dissipation.
- Delivering exceptional brightness, these lights provide ample illumination for wall washing applications.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.
- Tunable white option available over RF or Bluetooth.

Applications


- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels




NL 1606



NL 1607 (Adjustable)





Adjustable Beam



Specification

Model	NL 1606	NL 1607
Power (W)	11W	13W/15W
Color Temperature (CCT)	3K/4K/6K/TW	3K/4K/6K/TW
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	Reflector	Reflector
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP44	IP44
Dimming	Non-Dimmable	Non-Dimmable
Beam Angle	55°	55°
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 63mm H : 94mm C : 55mm	D : 83mm H : 91mm C : 55mm

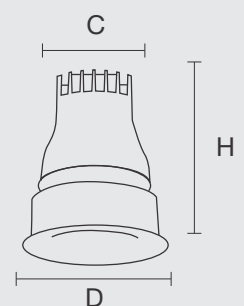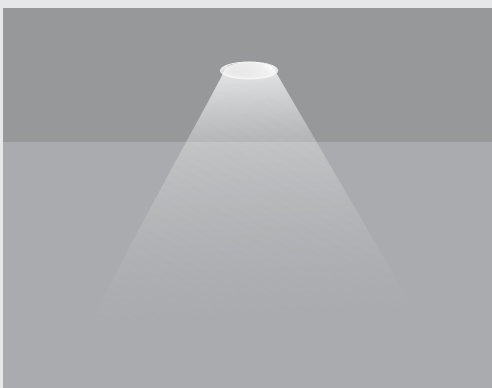



Indoor
Architectural
Lighting



Cirrus
Deep Recessed
Grey Steel Finish


Cirrus Deep Recessed Grey Steel Finish

Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications.
- The die-cast aluminum housing ensures efficient heat dissipation.
- Delivering exceptional brightness, these lights provide ample illumination.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.
- Tunable white option available over RF or Bluetooth.



Applications

- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels



Specification

Model	NL 1561	NL 1562	NL 1563	NL 1564
Power (W)	5W	10W	12W	18W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K/TW	3K/4K/6K/TW
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Reflector	Reflector	Reflector	Reflector
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Grey Steel	Grey Steel	Grey Steel	Grey Steel
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Beam Angle	36°	36°	50°	50°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 30mm H : 86mm C : 25mm	D : 35mm H : 91mm C : 31mm	D : 52mm H : 73mm C : 48mm	D : 62mm H : 90mm C : 58mm

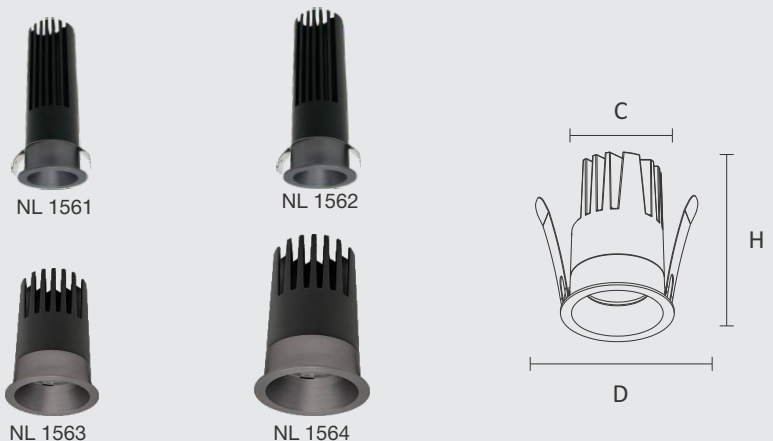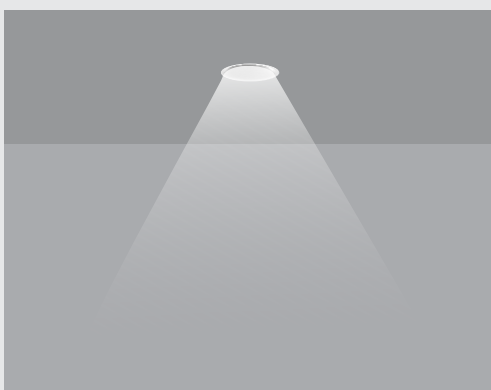



Indoor
Architectural
Lighting



Soothe
Anti-glare Black

Soothe

Anti-glare Black

Features

Soothe Anti-Glare black Ceiling Recessed fixed & adjustable lights are perfect for directional low glare application. The black surface of the fixture adds to aesthetic and reduces glare.

- Aluminium die cast housing.
- Ideal to create dark light environment.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated by handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.




Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification

Model	NL 1028	NL 1029	NL 1181	NL 1182	NL 1183
Power (W)	8W	11W	8W	12W	20W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	COB	COB	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT				
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 50mm C : 44mm H : 60mm	D : 67mm C : 59mm H : 72mm	D : 84mm C : 74mm H : 77mm	D : 108mm C : 86mm H : 95mm	D : 115mm C : 105mm H : 130mm

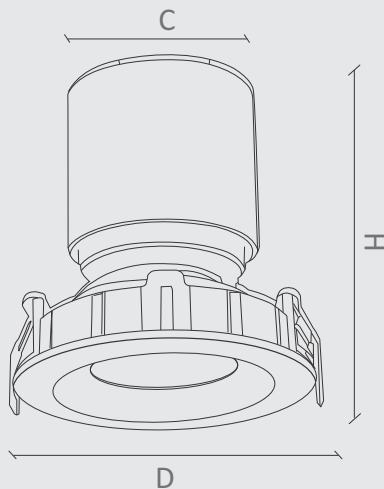

Indoor
Architectural
Lighting

NIRVANALIGHT[®]
Enlighten Your Life



Aqua
IP Series



Aqua

IP Series

Features

Aqua is a family of luminaire for wet area applications like washroom, bathroom, steam room, spa, external parapet of the building or any high humid wet aarea application.

- Aluminium die cast housing.
- Designed to withstand and perform in wet area application.
- Especially designed silicon gasket and lens combination is use to achieve IP54 & IP55 rating after concealing.


Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification

Model	NL 1130
Power (W)	11W
Color Temperature (CCT)	3K, 4K, 6K, TW
LED Type	COB
Housing	Aluminum Die cast
Finish	White
Color Rendering Index (CRI)	>80
Protection Rating (IP)	IP44
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT
Life Span (hours)	50,000 Hrs
Size	D : 85mm C : 75mm H : 75mm

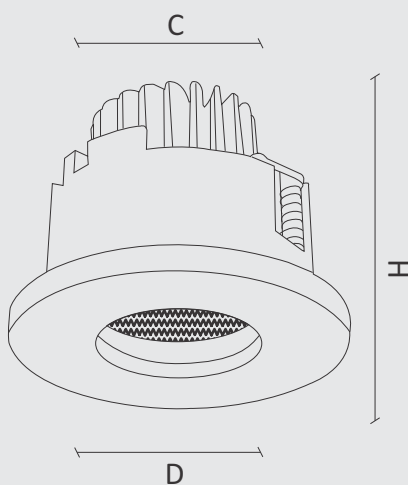

Indoor
Architectural
Lighting



Dazzle
SMD Down Light



Dazzle

SMD Down Lights

Features

Deep Round recessed mounted LED ceiling lights offer a perfect fit for a variety of lighting applications. Experience superior indoor lighting with our LED ceiling recessed back-lit panel light, designed to provide soft and uniform light distribution.

- Aluminium die-cast housing, Superior thermal management for longer-lasting performance.
- The high lumen output and a range of wattage and CCT options Available.
- Perfect for modern interiors, these lights bring both functionality and elegance to your space.

Applications


- Corporate Office
- Retail Cectors
- Commercial & Business Centres
- Hospitals & Airports
- Educational & Residential Premises



OSRAM EXTRA BRIGHT SMD LED

Specification

Model	NL 1194	NL 1195	NL 1196
Power (W)	10W/12W	15W/18W	21W/24W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	SMD	SMD	SMD
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 119mm C : 113mm H : 50mm	D : 155mm C : 147mm H : 53mm	D : 175mm C : 167mm H : 56mm

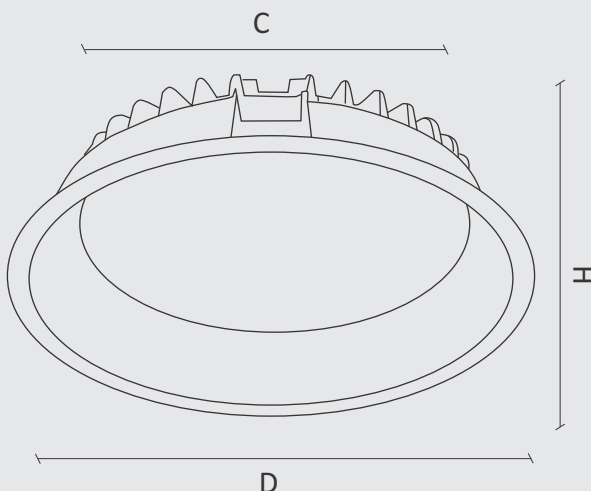



Indoor Architectural Lighting



Strike

Lineo - Down Light

Strike

Lineo


Features

In the architectural project, that gives light the task of overcoming the narrow boundaries of ordinariness, lighting can be the real surprise.

- Tunable White versions available (2700K ÷ 5700K).
- IOT enabled options available where in one can create different scenes through gadgets like Remote, Mobiles, Tablet, Laptops etc.
- Main body with radiant surface made of die-cast aluminium.
- Special body color combination like White, Black, Dark gray.


Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification

Model	NL 1414	NL 1415	NL 1416
Power (W)	10W/12W	17W	25W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	Hi-Power	Hi-Power	Hi-Power
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 147x45mm C : 140x37mm H : 49mm	D : 280x45mm C : 273x37mm H : 49mm	D : 415x45mm C : 405x37mm H : 49mm

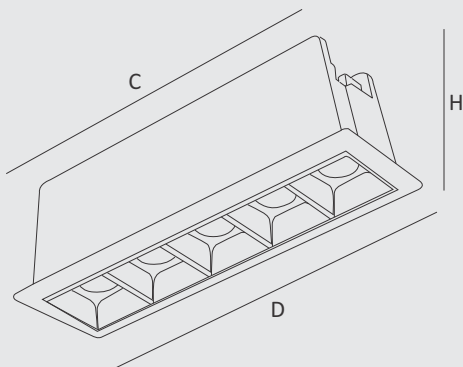

Specification

Model	NL 1414A	NL 1414B
Power (W)	10W/12W	10W/12W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	Hi-Power	Hi-Power
Housing	Aluminum Die cast	Aluminum Die cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT	
Life Span (hours)	50,000 Hrs	50,000 Hrs
	D : 147x45mm C : 147x37mm H : 49mm	D : 147x45mm C : 147x37mm H : 49mm

Body Colour - Wh / Bk
Dark Lighter Anti Glare



NL 1414A

Body Colour - Wh
Dark Lighter Anti Glare



NL 1414B





Indoor Architectural Lighting



Strike

Metallic -Down Light

Strike

Metallic

Features

Strike - Metallic is an extension of STRIKE Lineo Regular 45mm series with vibrant Metallic Mirror finish like Silver Chrome and True Copper offering new design possibility and touch of a metal in black n white world of lighting.


- Chrome Silver mirror finish / True Copper mirror finish
- Configuration of 5/10/15 LED Module
- Special body color combination like White, Black, Dark gray, Beige/Cream



Applications



- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries

Body Colour - White / Black
Reflector Option - Silver Chrome / Rose Gold




Specification


Model	NL 1414RG	NL 1415RG	NL 1416RG
Power (W)	10W/12W	17W	25W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	Hi-Power	Hi-Power	Hi-Power
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	Ring - White/Black Reflector - Rose Gold	Ring - White/Black Reflector - Rose Gold	Ring - White/Black Reflector - Rose Gold
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (Hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 147x45mm C : 140x37mm H : 49mm	D : 280x45mm C : 273x37mm H : 49mm	D : 415x45mm C : 405x37mm H : 49mm

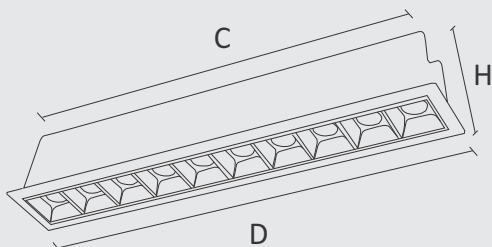

NL 1414RG



NL 1415RG



NL 1416RG

Specification

Model	NL 1414CR	NL 1415CR	NL 1416CR
Power (W)	10W/12W	17W	25W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	Hi-Power	Hi-Power	Hi-Power
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	Ring - White/Black Reflector - Silver Chrome	Ring - White/Black Reflector - Silver Chrome	Ring - White/Black Reflector - Silver Chrome
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 147x45mm C : 140x37mm H : 49mm	D : 280x45mm C : 273x37mm H : 49mm	D : 415x45mm C : 405x37mm H : 49mm



NL 1414CR



NL 1415CR




NL 1416CR





Indoor
Architectural
Lighting

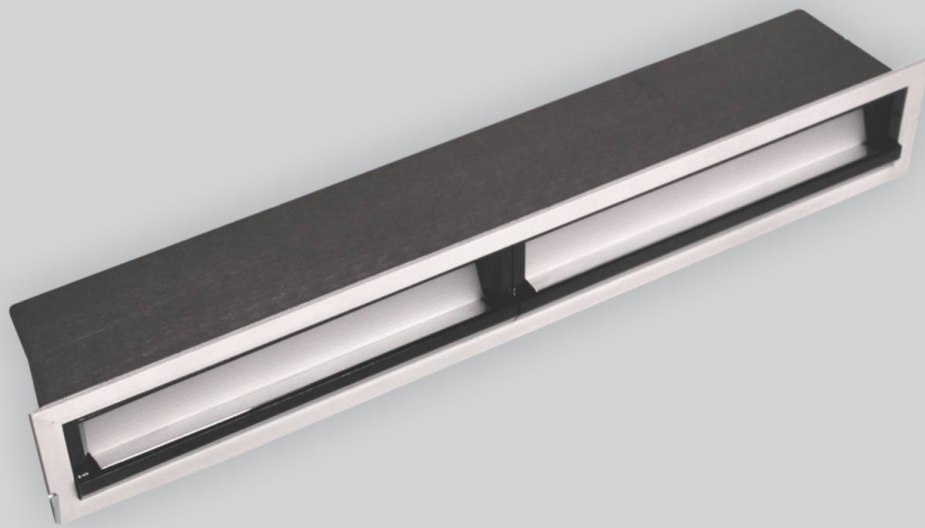

Strike


Even - Wall Washer

Strike

Even


Features

- Taking the road is the metaphor for walking towards a goal even and especially for lighting designers, when light want to point at a way with delicacy, consistency with the project and with the same visual power
- Configuration of 10W, 17W, 25W LED
- Black anti-glare angular fixed wall washer
- Special body color combination like White, Black

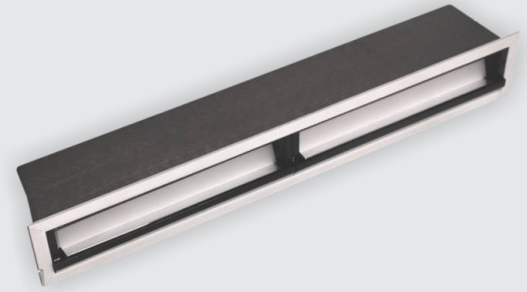



Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification


Model	NL 1417	NL 1418	NL 1419
Power (W)	10W/12W	17W	25W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	Hi-Power	Hi-Power	Hi-Power
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 147x45mm C : 140x37mm H : 49mm	D : 280x45mm C : 273x37mm H : 49mm	D : 415x45mm C : 405x37mm H : 49mm

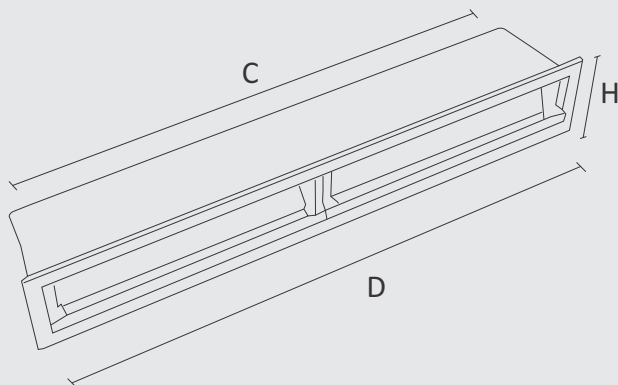

NL 1417




NL 1418



NL 1419

Indoor Architectural Lighting


NIRVANALIGHT[®]
Enlighten Your Life

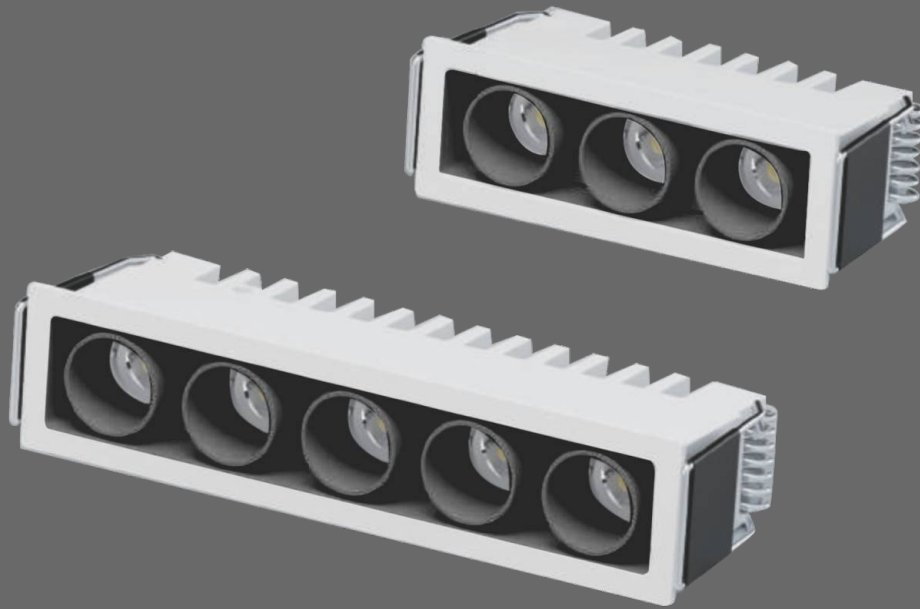

Brillo/Glowman Anti Glare Light

Brillo

Anti-glare Light



Features

- The main body features a radiant surface made of die-cast aluminum, ensuring durability and effective heat dissipation.
- Available in a range from 3000K to 6000K, allowing for customizable lighting that adapts to different moods and activities.
- The fixture is designed for tool-free installation, making it user-friendly and efficient.
- This innovative design is integrated into a sleek black antiglare screen, which effectively minimizes glare and enhances visual comfort.



NL 1571



NL 1572


Applications

- Living Room
- Lobby
- Showrooms
- Offices
- Corridor
- Study Room



Specification

Model	NL 1571	NL 1572
Power (W)	7W	12W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K/TW
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	Reflector	Reflector
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	Non-Dimmable	Non-Dimmable
Beam Angle	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 78mmx28mm H : 38mm C : 74mmx24mm	D : 128mmx28mm H : 38mm C : 116mmx24mm

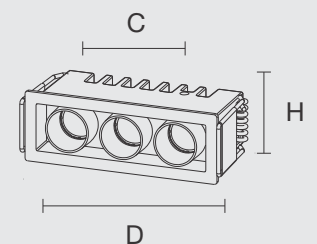


Glowman

Anti-glare Light

Features

- The main body features a radiant surface made of die-cast aluminum, ensuring durability and effective heat dissipation.
- Available in a range from 3000K to 6000K, allowing for customizable lighting that adapts to different moods and activities.
- The fixture is designed for tool-free installation, making it user-friendly and efficient.
- This innovative design is integrated into a sleek black antiglare screen, which effectively minimizes glare and enhances visual comfort.

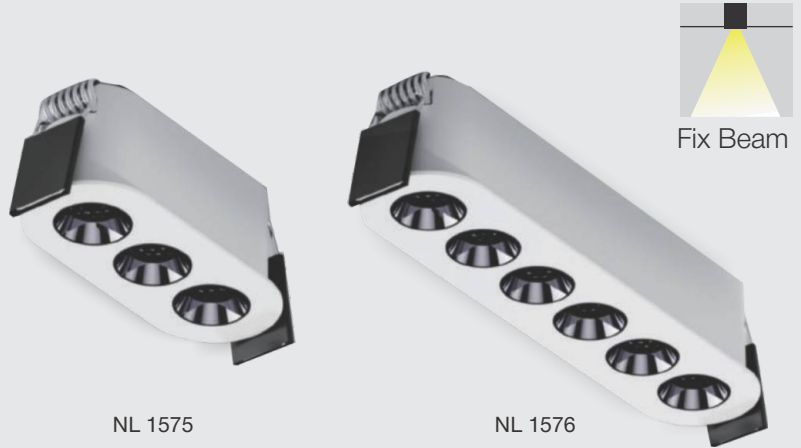


Applications

- Living Room
- Lobby
- Showrooms
- Offices
- Corridor
- Study Room




Specification

Model	NL 1575	NL 1576
Power (W)	7W	15W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K/TW
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	Reflector	Reflector
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	Non-Dimmable	Non-Dimmable
Beam Angle	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 69mmx30.5mm H : 27mm C : 64mmx25mm	D : 129mmx33mm H : 31.2mm C : 122mmx25mm

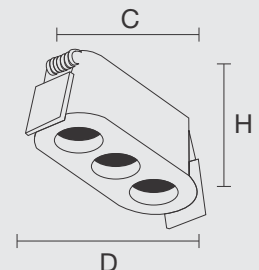



Indoor
Architectural
Lighting

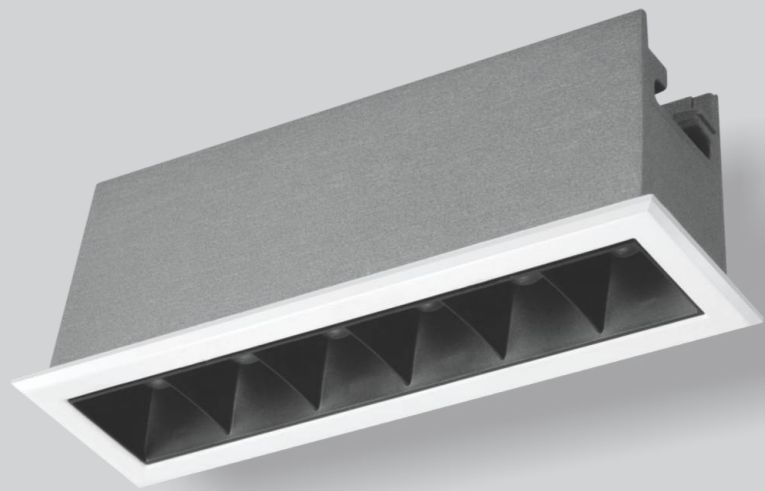


Strike
Minima 32mm
Light System

Strike Minima 32mm Light System

Features

Strike Minima 32 mm is minimalistic but expresses the maximum of its functionality through a light beam that interprets the surfaces it illuminates, by giving them new and unexpected purposes.

- A miniature version of strike with 32mm width in 3 options - 3Led (6w-480 Lumen), 6 LED, 12 LED .

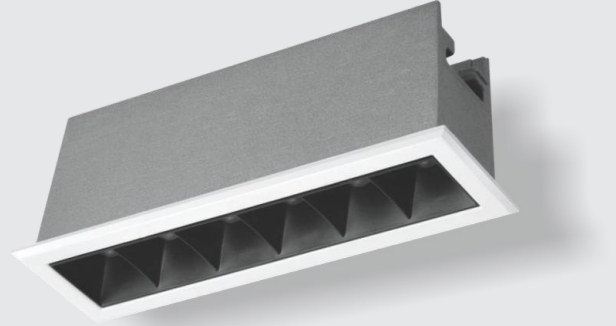



Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification

Model	NL 1421	NL 1422	NL 1423	NL 1441	NL 1442	NL 1443
Power (W)	6W	12W	20W	4W	8W	15W
Color Temperature (CCT)	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K
LED Type	High-Power	High-Power	High-Power	High-Power	High-Power	High-Power
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT					
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 62x32mm C : 57x28mm H : 40mm	D : 108x32mm C : 104x28mm H : 40mm	D : 204x32mm C : 200x28mm H : 40mm	D : 52x32mm C : 46x26mm H : 40mm	D : 52x52mm C : 46x46mm H : 40mm	D : 71x71mm C : 65x65mm H : 40mm

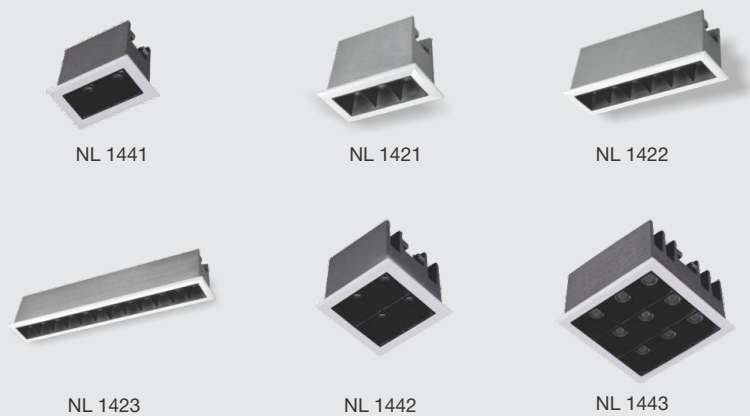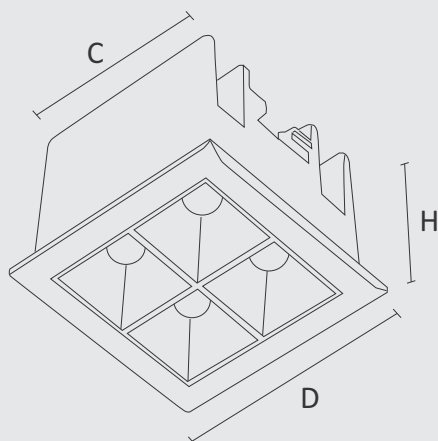



Indoor
Architectural
Lighting




Strike
Maxima 54mm
Light System

Strike Maxima 54 mm Light System

Features

Light and shades, dream and world. When light overcomes shadow, space opens to new perspectives and the construction of welcoming environments begins.

- Strike - Maxima with direct emission, carries into the real project the dream of calm, pleasantness, the ultimate visual comfort.

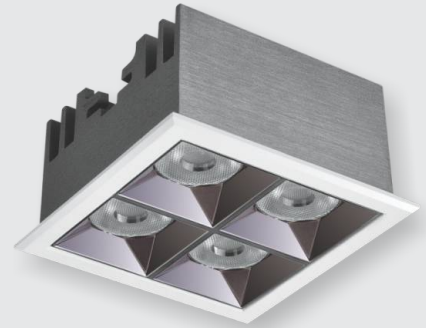



Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification

Model	NL 1424	NL 1425	NL 1426
Power (W)	6W	12W	20W
Color Temperature (CCT)	3K, 4K	3K, 4K	3K, 4K
LED Type	Hi-Power	Hi-Power	Hi-Power
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 54x54mm C : 49x49mm H : 50mm	D : 130x54mm C : 125x49mm H : 52mm	D : 206x54mm C : 201x49mm H : 52mm

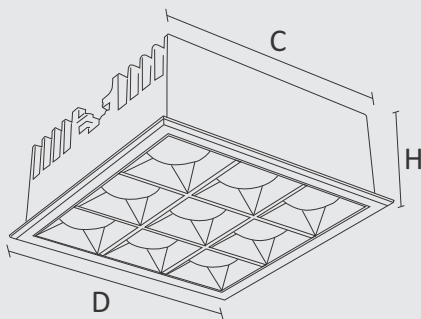

NL 1424




NL 1425




NL 1426

Specification


Model	NL 1427	NL 1428	NL 1429	NL 1430	NL 1431
Power (W)	35W	15W	35W	15W	35W
Color Temperature (CCT)	3K, 4K	3K, 4K	3K, 4K	3K, 4K	3K, 4K
LED Type	Hi-Power	Hi-Power	Hi-Power	Hi-Power	Hi-Power
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT				
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 396x54mm C : 390x49mm H : 52mm	D : 92x92mm C : 87x87mm H : 52mm	D : 130x130mm C : 125x125mm H : 52mm	D : 82x82mm H : 80mm	D : 120x120mm H : 90mm



NL 1427




NL 1428



NL 1429



NL 1430



NL 1431



Indoor
Architectural
Lighting



Strike
Circo
Light System

Strike Circo Light System

Features

There is always a story to tell, Probably hidden in the shadow; to describe it, it is necessary the same desecration, the taste for a style that shows without showing itself. The Circular design in Strike - Circo, A range of recessed downlights, is ideal for those who choose to distinguish themselves.

- This Circo range of STRIKE is available in 4 different conjugation like 6 LED, 12 LED, 18 LED, 24 LED




Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification

Model	NL 1432	NL 1433	NL 1434	NL 1435
Power (W)	8W	15W	20W	30W
Color Temperature (CCT)	3K, 4K	3K, 4K	3K, 4K	3K, 4K
LED Type	Hi-Power	Hi-Power	Hi-Power	Hi-Power
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 80mm H : 35mm C : 75mm	D : 128mm H : 35mm C : 120mm	D : 173mm H : 35mm C : 165mm	D : 218mm H : 35mm C : 205mm

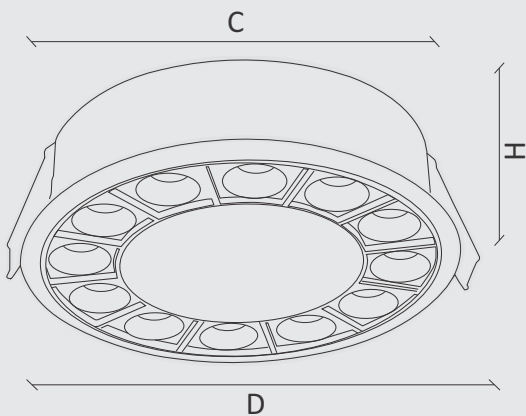

NL 1432



NL 1433



NL 1434



NL 1435



Indoor
Architectural
Lighting



Strike
Verso
Light System

Strike Verso Light System

Features

There are many solutions to turn on strong emotions, illuminating a space playing with light in a proper, rational way and, at the same time with imagination and creativity.

Verso comprises of sophisticated functional series of spotlight to create perfect balance ambience. Verso has 4 model including Wall Washer module with wide uniform field angle for even uniform spaced with high ceilings. Range comprises of 2 LED head, 4 Head, Deep adjustable and Wall Washer options.




Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification


Model	NL 1436	NL 1438	NL 1439
Power (W)	20W	10W	20W
Color Temperature (CCT)	3K, 4K	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	Hi-Power	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 190x70mm C : 182x62mm H : 44mm	D : 108x70mm C : 98x62mm H : 97mm	D : 190x70mm C : 182x62mm H : 97mm

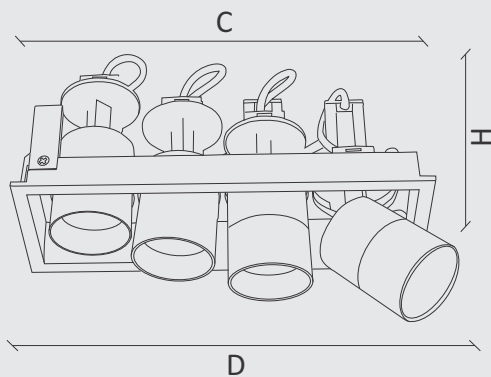



Indoor Architectural Lighting

NIRVANALIGHT[®]
Enlighten Your Life

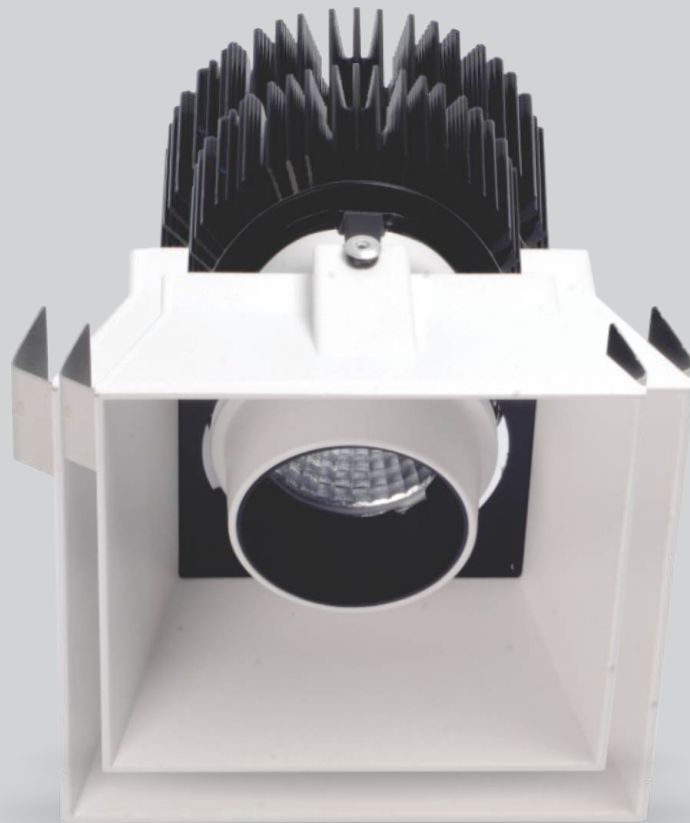

Hido Series

Fixed & Adjustable - Trimless

Hido Series

Fixed & Adjustable - Trimless

Features


Location, space and wall are the logical delimitation of the environment in which ideas move to give consistency, concreteness and originality to a lighting designers sparks.

- Aluminium die cast housing.
- Trimless version of spot light.
- Fix and adjustable deep recessed spot.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.




Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries




Specification				
Model	NL 1456	NL 1456A	NL 1457	NL 1460TL
Power (W)	12W	12W	10W	13W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	COB	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 85mm C : 114mm H : 120mm	D : 85mm C : 114mm H : 120mm	D : 85mm H : 100mm C : 114mm	D : 88mm H : 93mm C : 127mm

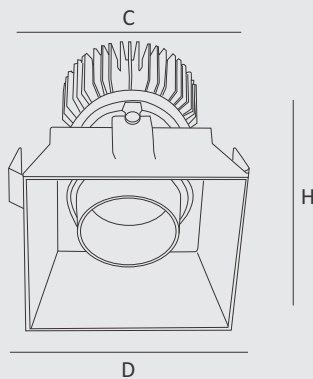

Hido Series

Fixed & Adjustable - Trimless

Specification			
Model	NL 1448-S1 TL	NL 1448-S2 TL	NL 1448-S3 TL
Power (W)	8W	11W/13W	15W/20W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 76mm H : 38mm C : 55mm	D : 98mm H : 45mm C : 75mm	D : 118mm H : 54mm C : 95mm



NL 1448-S1 TL



NL 1448-S2 TL



NL 1448-S3 TL





Indoor
Architectural
Lighting

NIRVANALIGHT[®]
Enlighten Your Life



Orofi
Surface Light



Orofi

Down Light

Features


The eye stares at the detail, a surface mounted, wall mounted or suspended luminaire, discloses it from above with a direct light, thus uncovering a brand-new perspective that changes the balance of the living space and makes it unique.

- Aluminium die cast housing.
- Surface mounted light suitable for concrete, wooden or any ceiling where screw fixing is possible.
- Wide range of wattage & CCT.



Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification

Model	NL 1464	NL 1465	NL 1478	NL 1479
Power (W)	8W	2x8W	10W	10W
Color Temperature (CCT)	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K
LED Type	COB	COB	Hi-Power	Hi-Power
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 100x100mm H : 100mm	D : 100x200mm H : 100mm	D : 91mm H : 60mm	D : 85mm H : 90mm



NL 1464



NL 1465




NL 1478



NL 1479

Specification

Model	NL 1491	NL 1348-S1-S	NL 1348-S2-S	NL 1348-S3-S
Power (W)	2x12W	10W	20W	32W
Color Temperature (CCT)	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K
LED Type	COB	COB	COB	COB
Housing	Aluminum Die cast	Aluminium Die cast	Aluminium Die cast	Aluminium Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 152x78mm H : 164mm	D : 50mm H : 208mm	D : 60mm H : 229mm	D : 71mm H : 249mm



NL 1491



NL 1348-S1-S



NL 1348-S2-S



NL 1348-S3-S





Indoor
Architectural
Lighting



Optima
Retail Recessed
Down Light System

Optima Retail Recessed Down Light System


Features

In architectural project that gives light the task of overcoming the narrow boundaries of ordinariness, lighting can be the real surprise. Recessed down lights arouses an amazement deriving from the transformation of a light source in real sculpture of spaces, in an elegant, not invasive and therefore, absolutely evident way.

- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.


Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries




Specification

Model	NL 1086	NL 0391	NL 0421
Power (W)	22W / 24W / 27W	25W/32W	36W/42W
Color Temperature (CCT)	3K, 4K, 6K,TW	3K, 4K, 6K,TW	3K, 4K, 6K,TW
LED Type	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 130mm H : 100mm C : 116mm	D : 115mm H : 121mm C : 103mm	D : 150mm H : 160mm C : 130mm

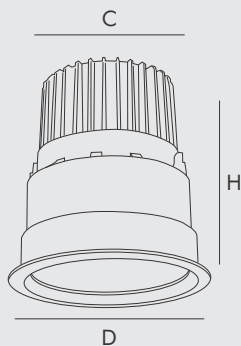

Optima Retail Recessed Down Light System

Specification			
Model	NL 1328	NL 1329	NL 1330
Power (W)	11W/15W	24W/32W	36W/42W
Color Temperature (CCT)	3K, 4K, 6K,TW	3K, 4K, 6K,TW	3K, 4K, 6K,TW
LED Type	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 94mm H : 72mm C : 85mm	D : 148mm H : 121mm C : 140mm	D : 180mm H : 147mm C : 170mm

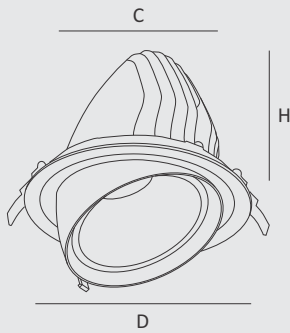

NL 1328



NL 1329




NL 1330





Indoor
Architectural
Lighting

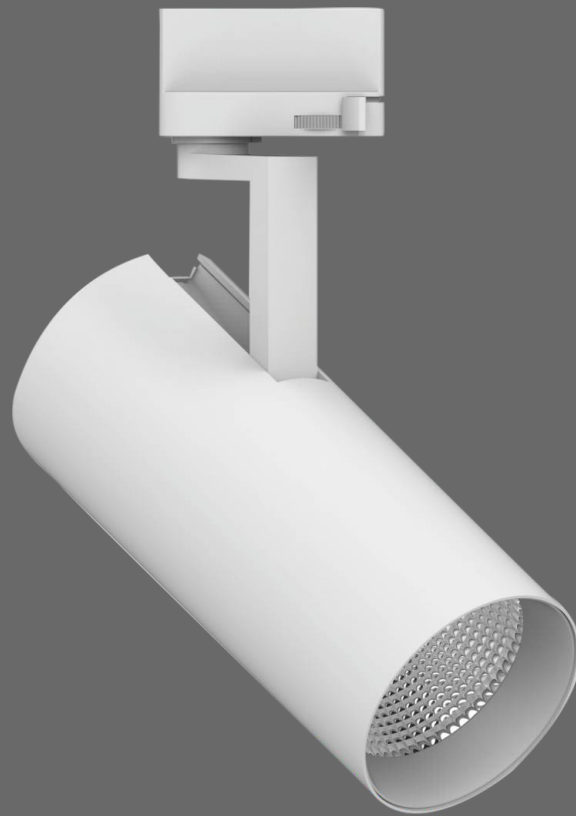

Twist
Retail Track
Light System


Twist Retail Track Light System

Features

- Intensity and strength depending on the width of the beam, a bright light similar to that of a halogen lamp to create visible and subtle spaces, dominant in the architectural project.
- Aluminium die cast housing.
- Track offers design freedom, rapid adoption of new lighting scheme in case of layout change.
- Increase flexibility in design at last moment changes.
- Beam options available like Narrow, Medium, Wide.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.


Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Specification

	NL 1347-S2	NL 1347-S3
Model	NL 1347-S2	NL 1347-S3
Power (W)	15W/18W	32W
Color Temperature (CCT)	3K, 4K, 6K	3K, 4K, 6K
LED Type	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT	
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 65mm H : 166mm	D : 82mm H : 180mm

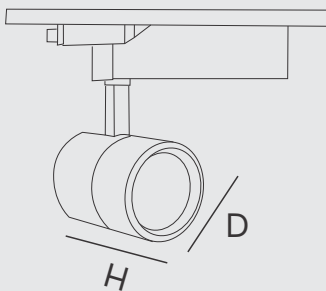

NL 1347-S2



NL 1347-S3




Track Channel



Straight Jointer

Specification

Model	NL 1348-S1	NL 1348-S2	NL 1348-S3
Power (W)	11W	20W	32W
Color Temperature (CCT)	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K
LED Type	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	Non Dimmable		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 50mm H : 208mm	D : 60mm H : 229mm	D : 71mm H : 249mm



NL 1348-S1



NL 1348-S2



NL 1348-S3



PROFILE

Indoor Architectural Lighting



Matrix Suspended Lights

Matrix Suspended Light System

Features

- Aluminium extruded housing.
- Diffuse dot less light through surface.
- Wide range of wattage & CCT in 80 CRI like 3000K, 4000K, 6000K.
- Special CCT available on request like, 2200K, 2700K, 3500K, 5000K,
- High CRI available on request like 3000K & 4000K.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.


Applications

- Hall
- Bedroom
- Kitchen
- Landscape lighting
- Sculptures




Specification

Model	NL 5029	NL 5030
Power (W)	36W/72W	36W/72W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Operating Current	AC 220V-240V	AC 220V-240V
Housing	Aluminum Extrusion	Aluminum Extrusion
Finish	White / Black	White / Black
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT	
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	L : 4Ft/8Ft BxH : 55x75mm	L : 4Ft/8Ft BxH : 35x66mm



NL 5029 (4ft/8ft)



NL 5030 (4ft/8ft)



Indoor
Architectural
Lighting



Uniquo
Surface & Recessed
Light System

Uniquo Surface & Recessed Light System

Features

- Aluminium extruded housing.
- Diffuse dot less light through surface.
- Wide range of wattage & CCT in 80 CRI like 3000K, 4000K, 6000K.
- Special CCT available on request like, 2200'K , 2700'K 3500K, 5000K,
- High CRI available on request like 3000K & 4000K.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.

Applications

- Hall
- Bedroom
- Kitchen
- Landscape lighting
- Sculptures




Specification

Model	NL 5205-S20	NL 5205-S45
Power (W)	22W	34W
Color Temperature (CCT)	3K, 4K, 6W,TW	3K, 4K, 6W,TW
Operating Current	AC 220V-240V	AC 220V-240V
Housing	Aluminum Extrusion	Aluminum Extrusion
Finish	Black/White	Black/White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT	
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	L : 536mm BxH : 42x45mm	L : 1201mm BxH : 42x45mm



Indoor
Architectural
Lighting

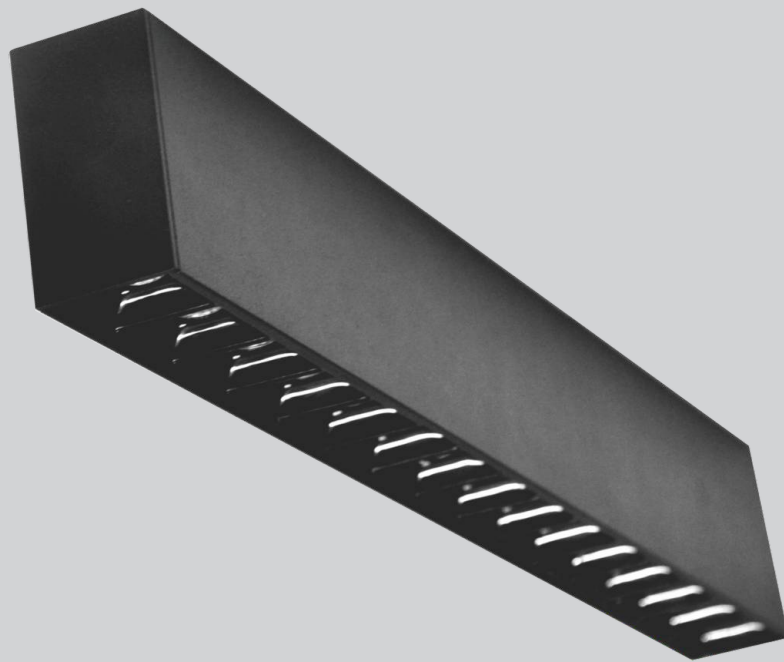

Combo-35mm
Surface & Suspended
Light System

Combo-35mm/54mm Surface & Suspected Recessed (Trimless) Light System

Features

There are many solutions to turn on strong emotions, illuminating a space playing with light in a proper, rational way and at the same time, with imagination and creativity.

- Aluminium extruded housing
- Dot less diffuser
- Wide range of wattage & CCT in 80 CRI like 3000K, 4000K, 6000K.
- Special CCT available on request like, 2200K, 2700K, 3500K, 5000K.
- High CRI available on request like 3000K and 4000K
- Tunable white option available over RF or Bluetooth.
- IOT - Product can be operated through handheld devices like smartphone, tablet, laptop or Desktop even from remote location over internet or Bluetooth intranet Network.


Applications

- Hall
- Bedroom
- Kitchen
- Landscape lighting
- Sculptures



Specification


Model	NL 5031-S5	NL 5031-S10	NL 5031-S15	NL 5031-S30	NL 5031-S45
Power (W)	10W	17W	25W	34W	36W
Color Temperature (CCT)	3K, 4K, 6W, TW	3K, 4K, 6W, TW	3K, 4K, 6W, TW	3K, 4K, 6W, TW	3K, 4K, 6W, TW
Operating Current	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Housing	Aluminum Extrusion				
Finish	Black/White	Black/White	Black/White	Black/White	Black/White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT				
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	L : 137mm BxH : 34x76mm	L : 270mm BxH : 34x76mm	L : 403mm BxH : 34x76mm	L : 802mm BxH : 34x76mm	L : 1201mm BxH : 34x76mm

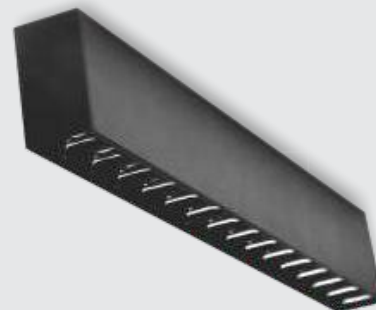

NL 5031



Indoor
Architectural
Lighting

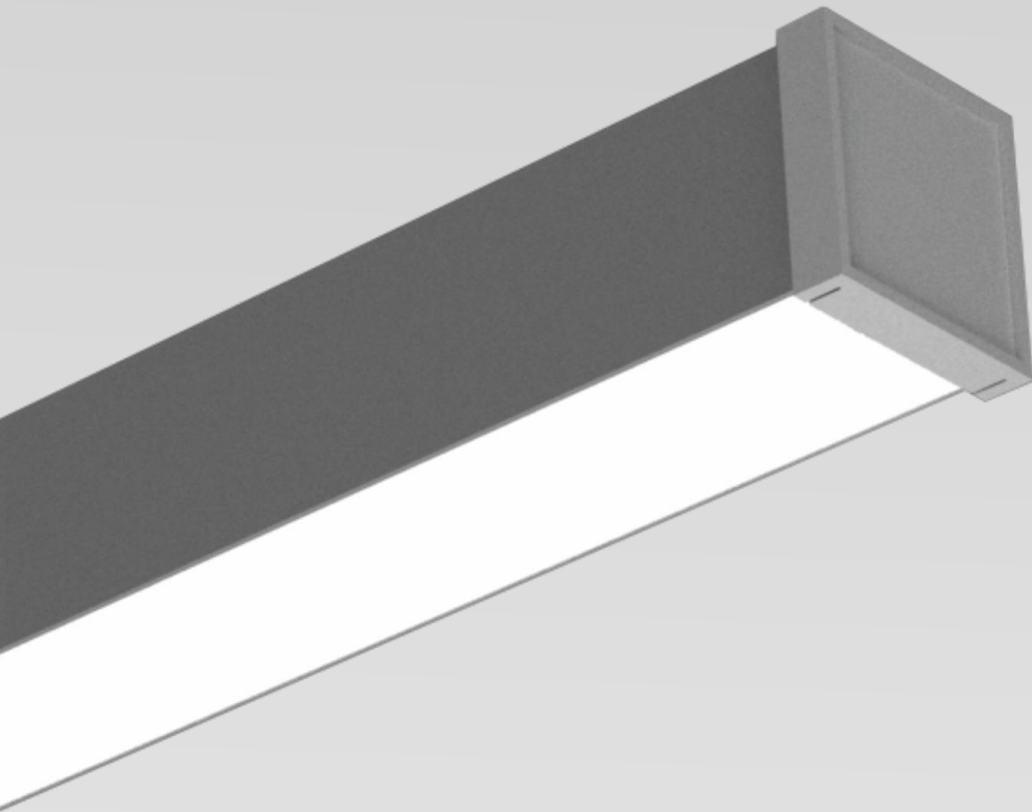

Passion Surfaced
Light System


Passion Surfaced Light System

Features

- Surface mounted profile is ideal for expressing a stylish and classic continuity. Recesso, tailored to suit false ceiling is a slim and elegantly designed fixture, ideally suited for office and software industry applications. It offers a uniform, glarefree, cool white and soft lighting in the workspace. Recesso is made of extruded aluminum for better thermal management.
- Aluminium extruded housing.
- Dot less diffuser.
- Wide range of wattage & CCT in 80 CRI like 3000K, 4000K, 6000K.
- Special CCT available on request like, 2200'K , 2700'K 3500K, 5000K,
- High CRI available on request lie 3000K & 4000K.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operate through handheld device like Smart phone, tablet, Laptop or desktop even from remote location over internet or Bluetooth intranet network.

Applications

- Hall
- Bedroom
- Kitchen
- Landscape lighting
- Sculptures

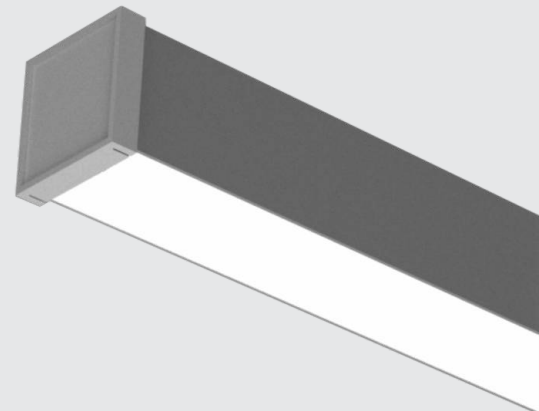


Specification

Model	NL 5071	NL 5072	NL 5073
Power (W)	18W/36W	18W/36W	27W/54W
Color Temperature (CCT)	3K, 4K, 6W,TW	3K, 4K, 6W, TW	3K, 4K, 6W, TW
Operating Current	24V DC	24V DC	24V DC
Housing	Aluminum Extrusion	Aluminum Extrusion	Aluminum Extrusion
Finish	Anodized Silver/Black/White		
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	L : 2ft / 4ft BxH : 35x35mm	L : 2ft / 4ft BxH : 52x35mm	L : 2ft / 4ft BxH : 75x35mm



Indoor Architectural Lighting

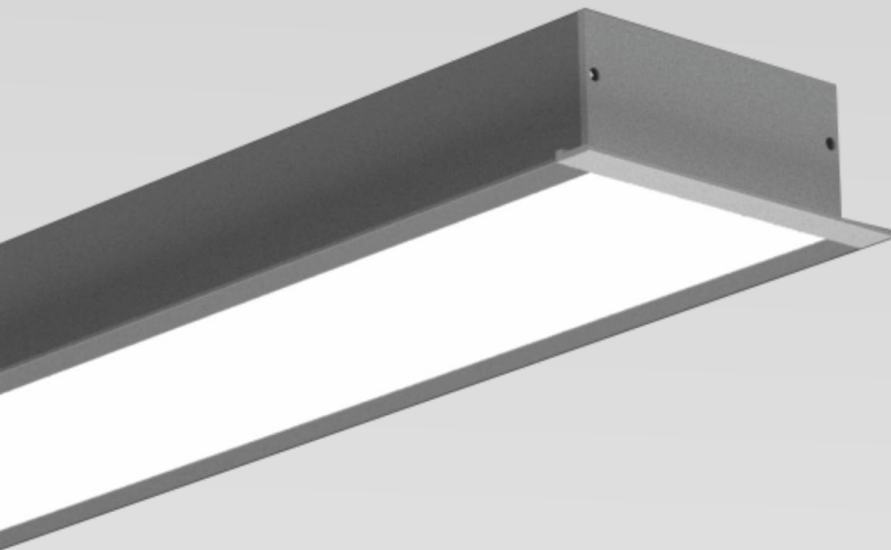

Outre-Recessed Light System


Outre Recessed Light System

Features

- Recessed mounted slim profile is ideal for expressing a stylish and classic continuity. Recesso, tailored to suit false ceiling is a slim and elegantly designed fixture, ideally suited for office and software industry applications. It offers a uniform, glarefree, cool white and soft lighting in the workspace. Recesso is made of extruded aluminum for better thermal management.
- Aluminium extruded housing.
- Dot less diffuser.
- Wide range of wattage & CCT in 80 CRI like 3000K, 4000K, 6000K.
- Special CCT available on request like, 2200'K , 2700'K 3500K, 5000K,
- High CRI available on request lie 3000K & 4000K.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operate through handheld device like Smart phone, tablet, Laptop or desktop even from remote location over internet or Bluetooth intranet network.

Applications

- Hall
- Bedroom
- Kitchen
- Landscape lighting
- Sculptures

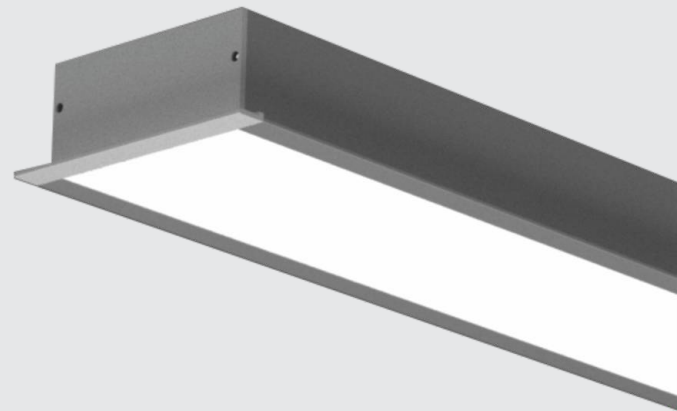


Specification

Model	NL 5074	NL 5075	NL 5076
Power (W)	18W/36W	18W/36W	27W/54W
Color Temperature (CCT)	3K, 4K, 6W,TW	3K, 4K, 6W,TW	3K, 4K, 6W,TW
Operating Current	24V DC	24V DC	24V DC
Housing	Aluminum Extrusion	Aluminum Extrusion	Aluminum Extrusion
Finish	Anodized Silver/Black/White		
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	L : 2ft / 4ft BxH : 35x35mm	L : 2ft / 4ft BxH : 65x35mm	L : 2ft / 4ft BxH : 90x35mm



Indoor
Architectural
Lighting

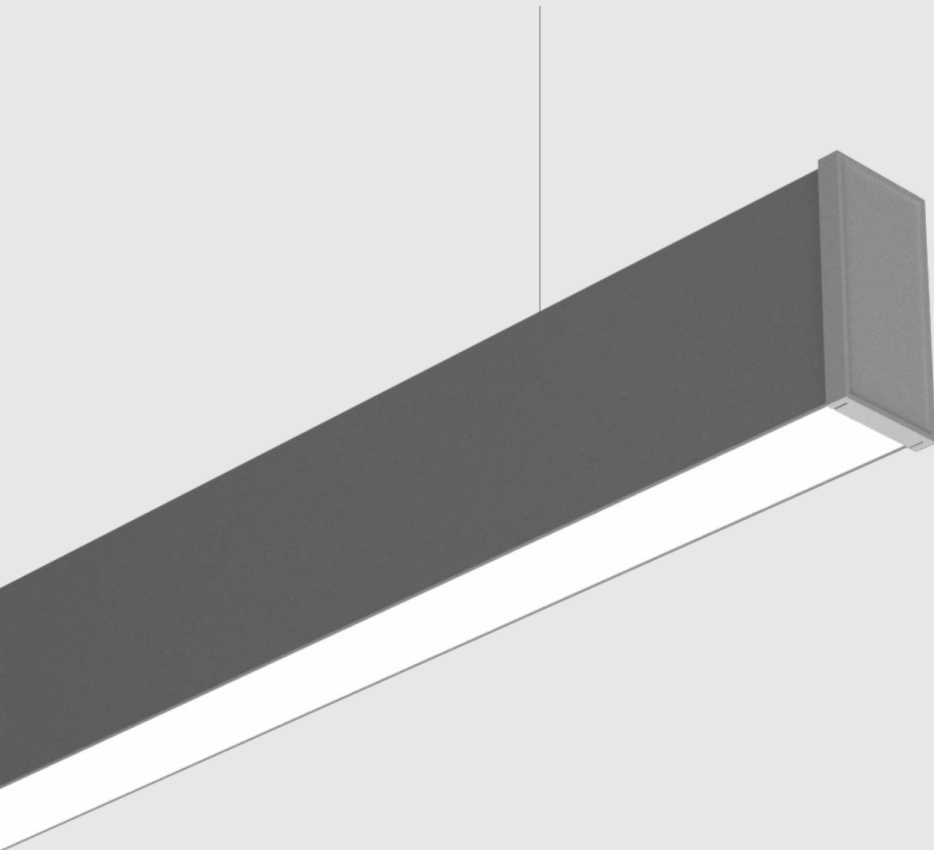

Scoop-Suspended
Light System


Scoop-Suspended Light System

Features

- Suspended profile is ideal for expressing a stylish and classic continuity. Recesso, tailored to suit false ceiling is a slim and elegantly designed fixture, ideally suited for office and software industry applications. It offers a uniform, glarefree, cool white and soft lighting in the workspace. Recesso is made of extruded aluminum for better thermal management.
- Aluminium extruded housing.
- Dot less diffuser.
- Wide range of wattage & CCT in 80 CRI like 3000K, 4000K, 6000K.
- Special CCT available on request like, 2200°K, 2700°K, 3500K, 5000K,
- High CRI available on request lie 3000K & 4000K.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operate through handheld device like Smart phone, tablet, Laptop or desktop even from remote location over internet or Bluetooth intranet network.

Applications

- Hall
- Bedroom
- Kitchen
- Landscape lighting
- Sculptures

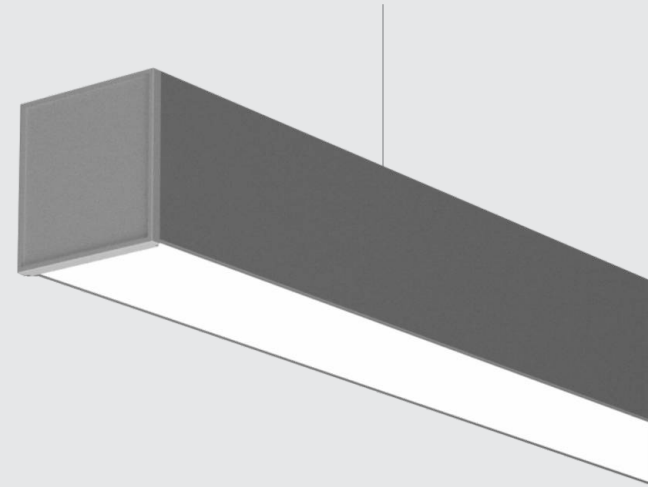


Specification

Model	NL 5077	NL 5078	NL 5079
Power (W)	18W/36W	18W/36W	27W/54W
Color Temperature (CCT)	3K, 4K, 6W, TW	3K, 4K, 6W, TW	3K, 4K, 6W, TW
Operating Current	24V DC	24V DC	24V DC
Housing	Aluminum Extrusion		
Finish	Anodized Silver/Black/White		
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	L : 2ft / 4ft BxH : 35x75mm	L : 2ft / 4ft BxH : 52x75mm	L : 2ft / 4ft BxH : 75x75mm



Indoor
Architectural
Lighting

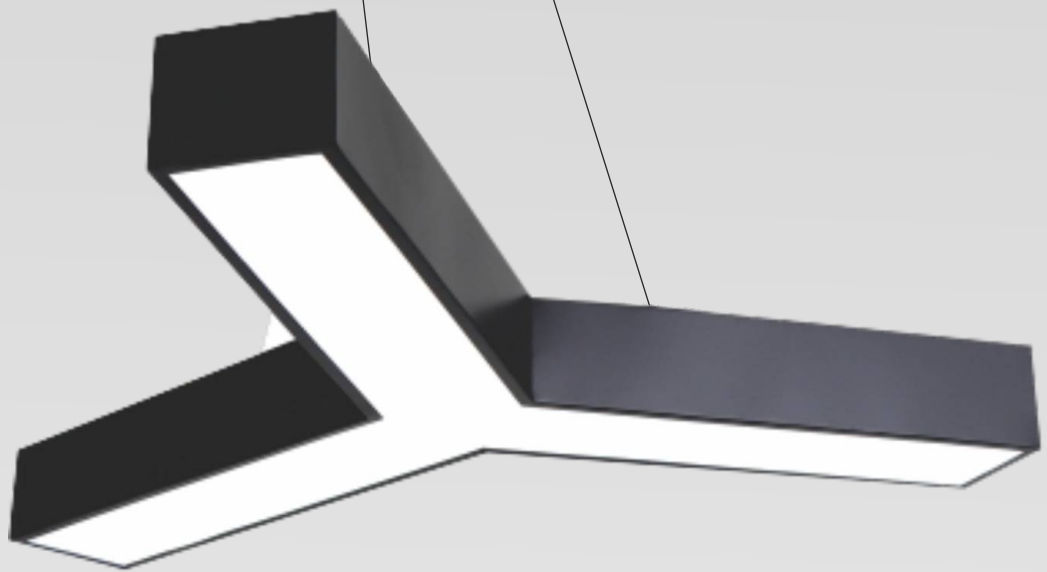

Aspirio-
Y/Hexa/Triangle

Aspirio



Y/Hexa/Triangle

Features

- Aluminium extruded housing.
- Diffuse dot less light through surface.
- Wide range of wattage & CCT in 80 CRI like 3000K, 4000K, 6000K.
- Special CCT available on request like, 2200'K , 2700'K 3500K, 5000K,
- High CRI available on request lie 3000K & 4000K.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.


Applications

- Hall
- Bedroom
- Kitchen
- Landscape lighting
- Sculptures

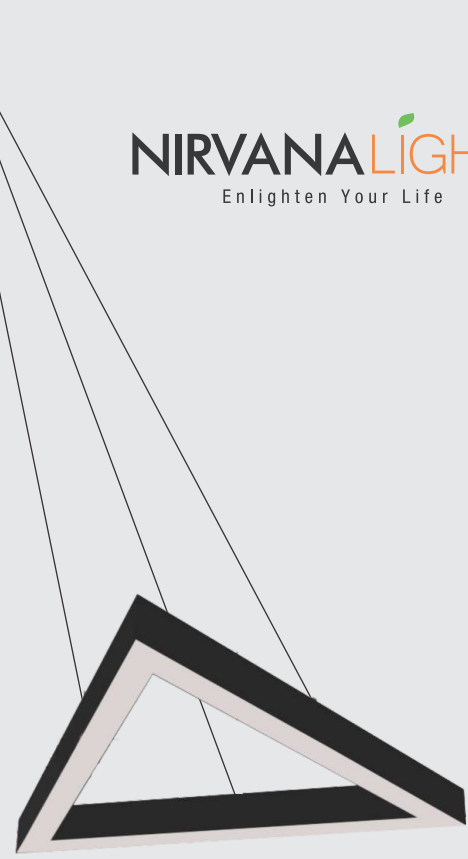


Specification

Model	NL 5078Y	NL 5078H	NL 5078T
Power (W)	27W/54W	54W/108W	27W/54W
Color Temperature (CCT)	3K, 4K, 6W, TW	3K, 4K, 6W, TW	3K, 4K, 6W, TW
Operating Current	24V DC	24V DC	24V DC
Housing	Aluminum Extrusion		
Finish	White/Black	White/Black	White/Black
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	L : 585mm BxH : 52x75mm	L : 480/776mm BxH : 52x75mm	L : 480/776mm BxH : 52x75mm

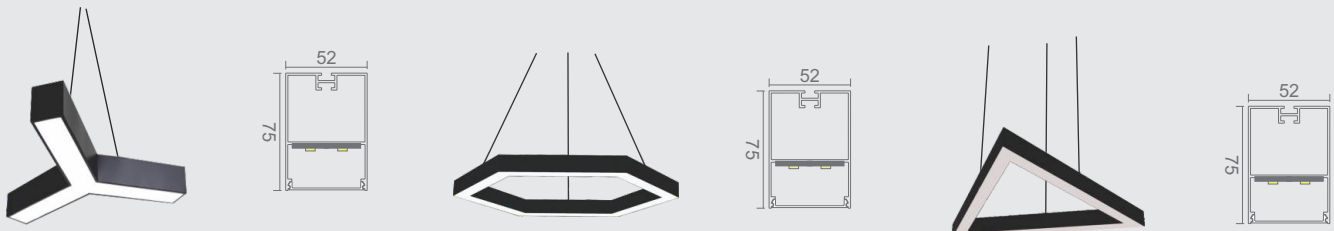



Indoor Architectural Lighting

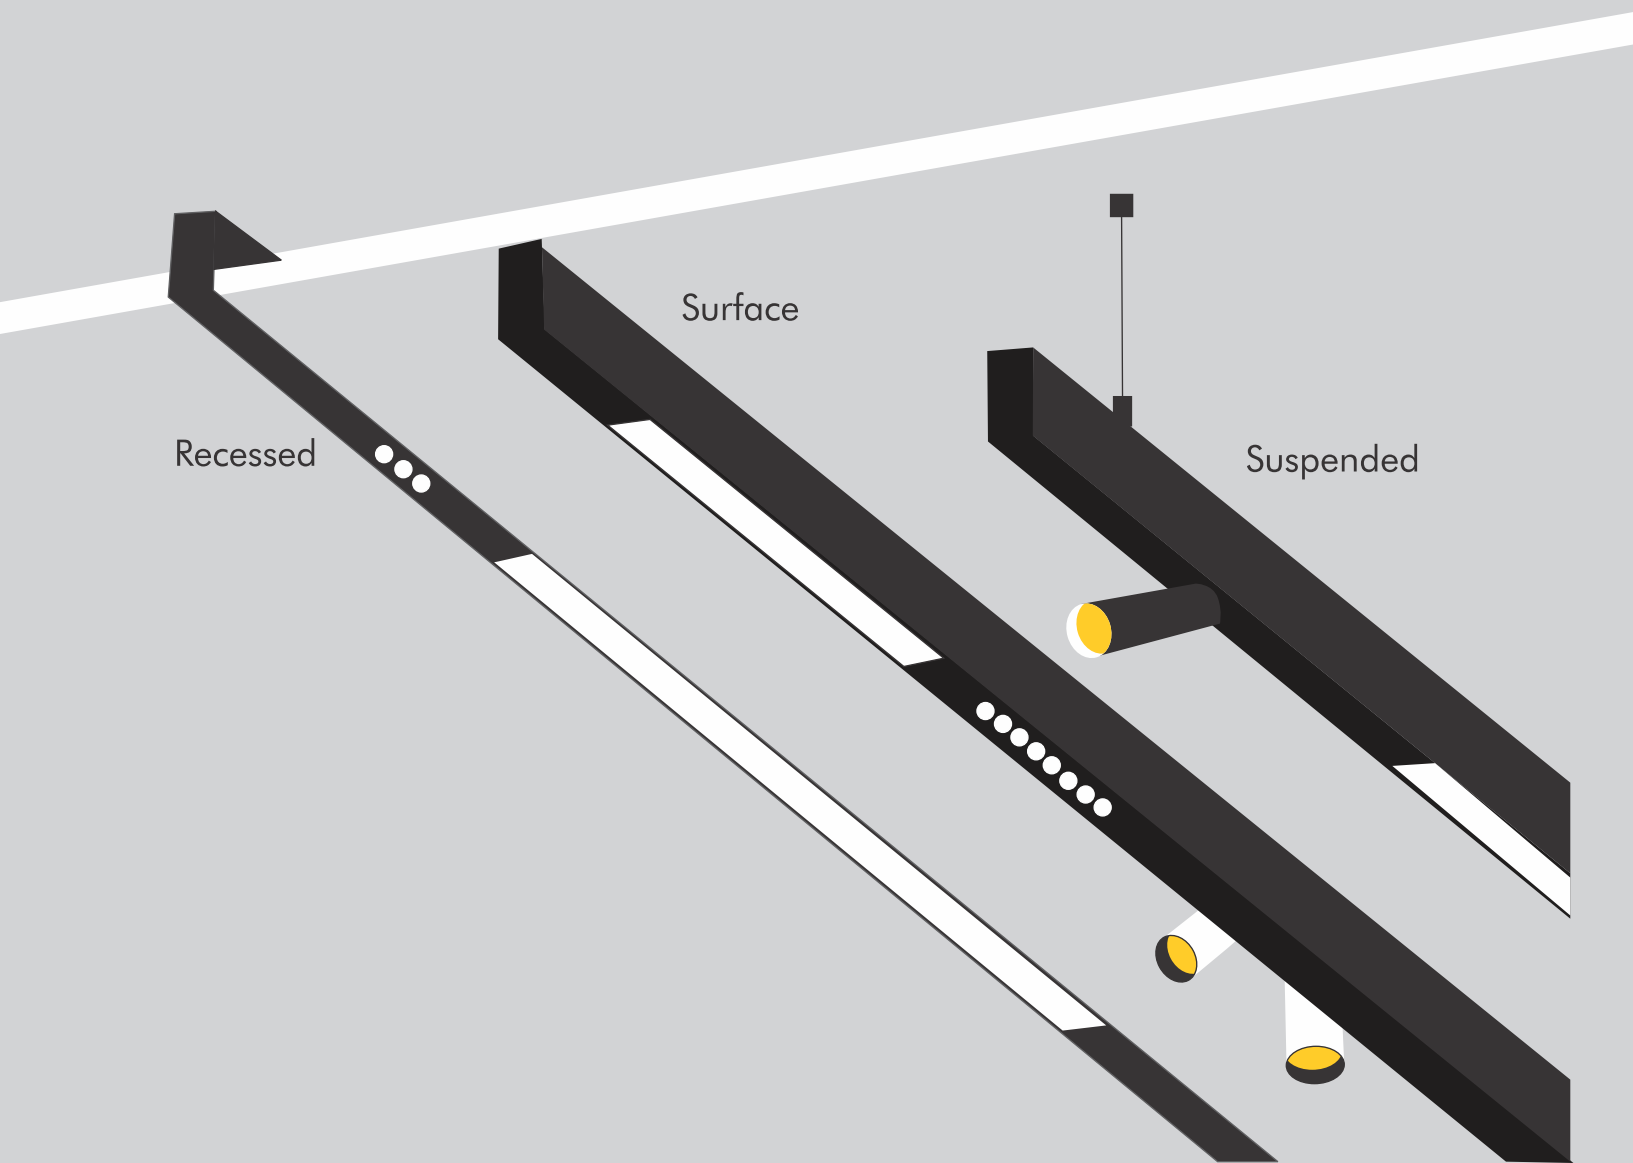

Cruiser - 20mm/35mm
Magnetic + Lockable
Lights



Indoor
Architectural
Lighting



Cruiser - 20mm
Magnetic + Lockable
Lights

Cruiser - 20mm Magnetic + Regular Lights

Features

- There are many solutions to turn on strong emotions, illuminating a space playing with light in a proper, rational way and at the same time, with imagination and creativity.



Aluminium extruded housing
Dot less diffuser

Wide range of wattage & CCT in 80 CRI like 3000K, 4000K, 6000K.
Special CCT available on request like, 2200K, 2700K, 3500K, 5000K.

High CRI available on request like 3000K and 4000K

Tunable white option available over RF or Bluetooth.

IOT - Product can be operated through handheld devices like smartphone, tablet, laptop or Desktop even from remote location over internet or Bluetooth intranet Network.

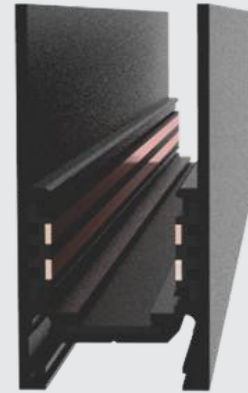

Applications

- Hall
- Bedroom
- Kitchen
- Landscape lighting
- Sculptures

Tunable White Accessories



Remote
Bluetooth Remote Control
For Magnetic Track Light



Switch Panel




Bluetooth Mesh

Magnetic Track


Specification

Model	NL ML20-S 100 NL ML20-S 200	NL ML20-R2 100 NL ML20-R2 200 NL ML20-R2 300	NL ML20-S-Mini 100 NL ML20-S-Mini 200
Operating Voltage	48V DC	48V DC	48V DC
Housing	Aluminum	Aluminum	Aluminum
Finish	Black	Black	Black
CRI	>80	>80	>80
IP	IP20	IP20	IP20
Dimming		Non/Dali Dimmable	
Life Span	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	L : 1000 2000 mm BxH : 26x53mm	L : 1000 2000 3000mm BxH : 23x47mm	L : 1000 2000mm BxH : 27x28mm


NL ML20-S 100
NL ML20-S 200



NL ML20-R2 100
NL ML20-R2 200
NL ML20-R2 300

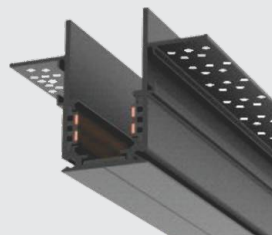

NL ML20-S-Mini 100
NL ML20-S-Mini 200



Linear Diffused Track Spot

Specification

Model	NL ML20 LG300	NL ML20 LG600	NL ML20 L90 LG300
Power (W)	12W	24W	24W
Color Temperature (CCT)	3K, 4K, TW	3K, 4K, TW	3K, 4K, TW
Operating Voltage	48V DC	48V DC	48V DC
Housing	Aluminum		
Finish	Black	Black	Black
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	Non/Dali Dimmable		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	L : 300mm BxH : 22x25mm	L : 600mm BxH : 22x25mm	L : 300x320mm BxH : 22x25mm



Linear Track Spot

Specification

Model	NL ML20 ST010	NL ML20 ST020	NL ML20 ST010 ADJ	NL ML20 LS004
Power (W)	10W	20W	10W	8W
Color Temperature (CCT)	3K, 4K	3K, 4K	3K, 4K	3K, 4K, TW
Operating Voltage	48V DC	48V DC	48V DC	48V DC
Housing	Aluminum	Aluminum	Aluminum	Aluminum
Finish	Black	Black	Black	Black
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	Non/Dali Dimmable			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	L : 172mm BxH : 22x25mm	L : 341mm BxH : 22x25mm	L : 246mm BxH : 22x42mm	L : 108mm BxH : 22x42mm

NL ML20 ST010



Linear Track Spot

NL ML20 ST020



Linear Track Spot

NL ML20 ST010 ADJ



Linear Adjustable Track Spot

NL ML20 LS004



SMD Track Spot


COB Track Spot

Specification

Model	NL ML35 SP007	NL ML35 SP012
Power (W)	7W	12W
Color Temperature (CCT)	3K, 4K, TW	3K, 4K, TW
Operating Voltage	48V DC	48V DC
Housing	Aluminum	Aluminum
Finish	Black	Black
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	Non/Dali Dimmable	
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	DxH : 36x150mm	DxH : 48x205mm



Accessories for 20mm Magnetic Series




NL ML20-S EC
END Cap for Surface /
Suspended Magnetic Track
Channel




NL ML20-R EC
END Cap for Recessed
Magnetic Track Channel



NL ML20-S- Mini EC
END Cap for Mini Suspended
Magnetic Track Channel




NL ML20-S Corner L90
90° Corner for Connecting Surface /
Suspended Magnetic Track
From Ceiling to Ceiling
Installation (C to C)



NL ML20-R1 Corner L90
90° Corner for Connecting
Recessed Magnetic Track
From Ceiling to Ceiling
Installation (C to C)



NL ML20-R1 Inner I90
90° Corner for Connecting
Recessed Magnetic Track
From Ceiling and Wall (C to W)



NL ML20-R1 Outer O90
90° Corner for Connecting
Recessed Magnetic Track
From Wall and Wall (W to W)



NL ML20-S- Mini Corner L90
90° Corner for Connecting Mini
Surface Mounted Magnetic Track
From Ceiling to Ceiling Installation
(C to C)



NL ML 20-35 PC2-R-50CM
DC Power wire for magnetic
track channel 0.5Mtr



NL ML 20-35 PC4-DALI-50CM
90° Corner for Connecting
Recessed Magnetic Track
From Ceiling and Wall (C to W)



NL ML 20-35 PC2-R-150CM
Power Connector - 4 wire
DC DALI Power wire for magnetic
track channel 0.5Mtr



NL ML20-S- Mini Corner L90
Power Connector - 4 wire
Straight DALI connect module
for all the track Light 1.5Mtr



NL ML 20-35 SJ 4 DALI
Straight Joints - 4 wire
DC DALI Power wire for magnetic
track channel 1.5Mtr



NL ML 20-35 Corner 4 DALI
Corner - 4 wire
Corner DALI connect module
for all the track Light



NL ML20-35 Suspension 1M
1.5Mtr Suspension Kit For
Magnetic Track Light



**NL ML20 PS48-100 /
NL ML20 PS 48-200**
48V-100W / 48V-200W
Integrated Power Supply
For Magnetic Track Light,
Non Dimmable



NL ML 20-35 Straight Support S
Straight Joints For Surface /
Suspended Track Light



NL ML 20-35 Straight support R
Straight Joints For Recessed
Track Light



Indoor
Architectural
Lighting



Cruiser - 35mm
Magnetic + Lockable
Lights

Cruiser - 35mm Magnetic + Lockable Lights

Features

- There are many solutions to turn on strong emotions, illuminating a space playing with light in a proper, rational way and at the same time, with imagination and creativity.

Aluminium extruded housing

Dot less diffuser


Wide range of wattage & CCT in 80 CRI like 3000K, 4000K, 6000K.

Special CCT available on request like, 2200K, 2700K, 3500K, 5000K.

High CRI available on request like 3000K and 4000K


Tunable white option available over RF or Bluetooth.

IOT - Product can be operated through handheld devices like smartphone, tablet, laptop or Desktop even from remote location over internet or Bluetooth intranet Network.

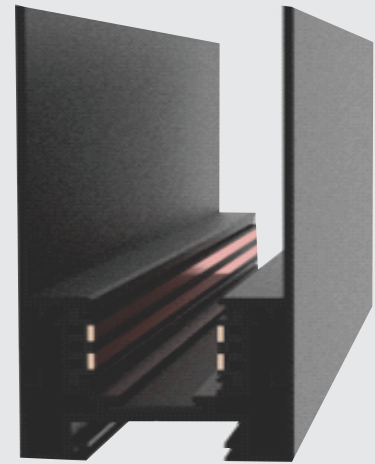

Applications

- Hall
- Bedroom
- Kitchen
- Landscape lighting
- Sculptures



Tunable White Accessories



Remote

Bluetooth Remote Control
For Magnetic Track Light



Switch Panel




Bluetooth Mesh

Magnetic Track


Specification

Model	NL ML35-S 100 NL ML35-S 200	NL ML35-R2 100 NL ML35-R2 200 NL ML35-R2 300
Operating Voltage	48V DC	48V DC
Housing	Aluminum	Aluminum
Finish	Black	Black
CRI	>80	>80
IP	IP20	IP20
Dimming	Non/Dali Dimmable	
Life Span	50,000 Hrs	50,000 Hrs
Size	L : 1000 2000 mm BxH : 38x79mm	L : 1000 2000 3000mm BxH : 74x72mm

NL ML35-S 100
NL ML35-S 200





NL ML35-R1 100
NL ML35-R1 200
NL ML35-R1 300

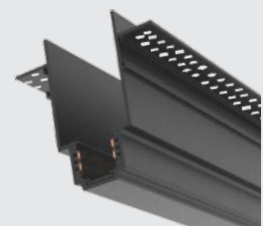

Linear Diffused Track Spot

Specification			
Model	NL ML35 LG265	NL ML35 Lg530	NL ML35 L90 LG300
Power (W)	12W	24W	24W
Color Temperature (CCT)	3K, 4K, TW	3K, 4K, TW	3K, 4K, TW
Operating Voltage	48V DC	48V DC	48V DC
Housing	Aluminum	Aluminum	Aluminum
Finish	Black	Black	Black
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	Non/Dali Dimmable		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	L : 265mm BxH : 34x50.5mm	L : 530mm BxH : 34x50.5mm	L : 300x320mm BxH : 34x50.5mm

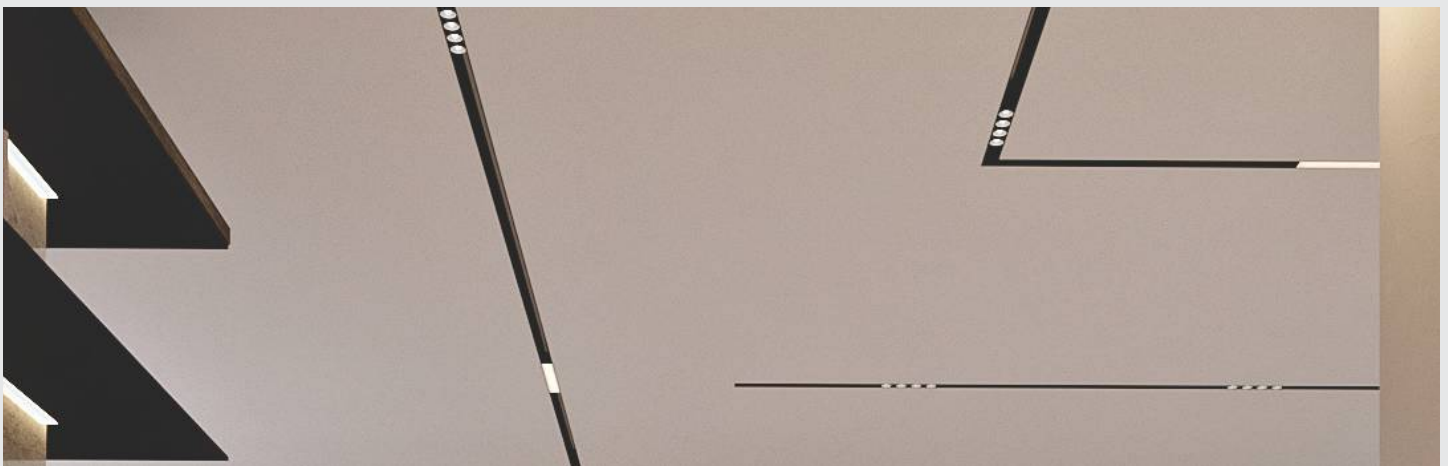

Linear Track Spot

Specification				
Model	NL ML35 ST010	NL ML35 ST020	NL ML35 ST-C 010	NL ML35 ST-C 020
Power (W)	10W	20W	10W	8W
Color Temperature (CCT)	3K, 4K, TW	3K, 4K, TW	3K, 4K, TW	3K, 4K, TW
Operating Current	48V DC	48V DC	48V DC	48V DC
Housing	Aluminum	Aluminum	Aluminum	Aluminum
Finish	Black	Black	Black	Black
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	Non/Dali Dimmable			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	L : 135mm BxH : 34x50.5mm	L : 265mm BxH : 34x50.5mm	L : 151mm BxH : 34x50.5mm	L : 302mm BxH : 34x50.5mm

NL ML35 ST010



Linear Track Spot

NL ML35 ST020



Linear Track Spot

NL ML35 ST-C 010



Linear Diffused Track Light

NL ML35 ST-C 020



Linear Diffused Track Light


COB Track Spot

Specification

Model	NL ML35 SP007	NL ML35 SP012
Power (W)	7W	12W
Color Temperature (CCT)	3K, 4K, TW	3K, 4K, TW
Operating Current	48V DC	48V DC
Housing	Aluminum	Aluminum
Finish	Black	Black
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	Non/Dali Dimmable	Non/Dali Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	DxH : 36x150mm	DxH : 48x205mm



Accessories for 35mm Magnetic Series




NL ML35-S EC
End Cap For Surface /
Suspended Track Channel




NL ML35-R1 EC
End Cap For Recessed
Track Channel



**NL ML35 PS 48-100 /
NL ML35 PS 48-200**
48V-100W / 48V-200W
Integrated Power Supply
For Magnetic Track Light,
Non Dimmable




NL ML35-S Corner L90
90° Corner for Connecting
Surface / Suspended Magnetic Track
From Ceiling to Ceiling Installation
(C to C)



NL ML35-R1 Corner L90
90° Corner for Connecting
Recessed Magnetic Track
From Ceiling to Ceiling
Installation (C to C)



NL ML35-R1 Inner I90
90° Corner for Connecting
Recessed Magnetic Track
From Ceiling and Wall (C to W)



NL ML35-R1 Outer O90
90° Corner for Connecting
Recessed Magnetic Track
From Wall and Wall (W to W)



NL ML 20-35 PC2-R-50CM
DC Power wire for magnetic
track channel
0.5Mtr



NL ML 20-35 PC4-DALI-50CM
Power Connector - 4 wire
DC DALI Power wire for
magnetic track channel
0.5Mtr



NL ML 20-35 PC2-R-150CM
DC Power wire for magnetic
track channel
1.5Mtr



NL ML 20-35 PC4-DALI-150CM
Power Connector - 4 wire
Straight DALI connect module
for all the track Light
1.5Mtr



NL ML 20-35 SJ 4 DALI
Straight Jointer - 4 wire
DC DALI Power wire for
magnetic track channel
1.5Mtr



NL ML 20-35 Corner 4 DALI
Corner - 4 wire
Corner DALI connect module
for all the track Light



NL ML20-35 Suspension 1M
1.5Mtr Suspension Kit For
Magnetic Track Light



NL ML 20-35 Straight Support S
Straight Jointer For Surface /
Suspended Track Light



NL ML 20-35 Straight support R
Straight Jointer For Recessed
Track Light

OUTDOOR

Outdoor Architectural Lighting

NIRVANALIGHT[®]
Enlighten Your Life



Gardo

Spot Light

Designed to illuminate
for Landscape, Squares,
Facade & high comfort,
efficiency with lighting
flexibility.

Gardo

Spot Light

Gardo is a family of high performance protections available in round in four different sizes, and Square in three different sizes.

It expresses the synthesis of the essential characteristics of a professional spotlight: design, strength, precision, visual comfort, high efficiency & luminous flexibility.

Ideal for illumination of plants, bushes, trees, building facade, monuments, statues, sculptures & many other lighting applications.



NL 4305



NL 4306



NL 4309



NL 4301



NL 4310



NL 4307



NL 4308

Internal Accessories



Honeycomb Reflector

External Accessories



Hood



Earth Spike



Tree Strap For Surface



IP67 Cable Gland -PG7




IP67 Cable Connector

Standard Finish



Customise Finish

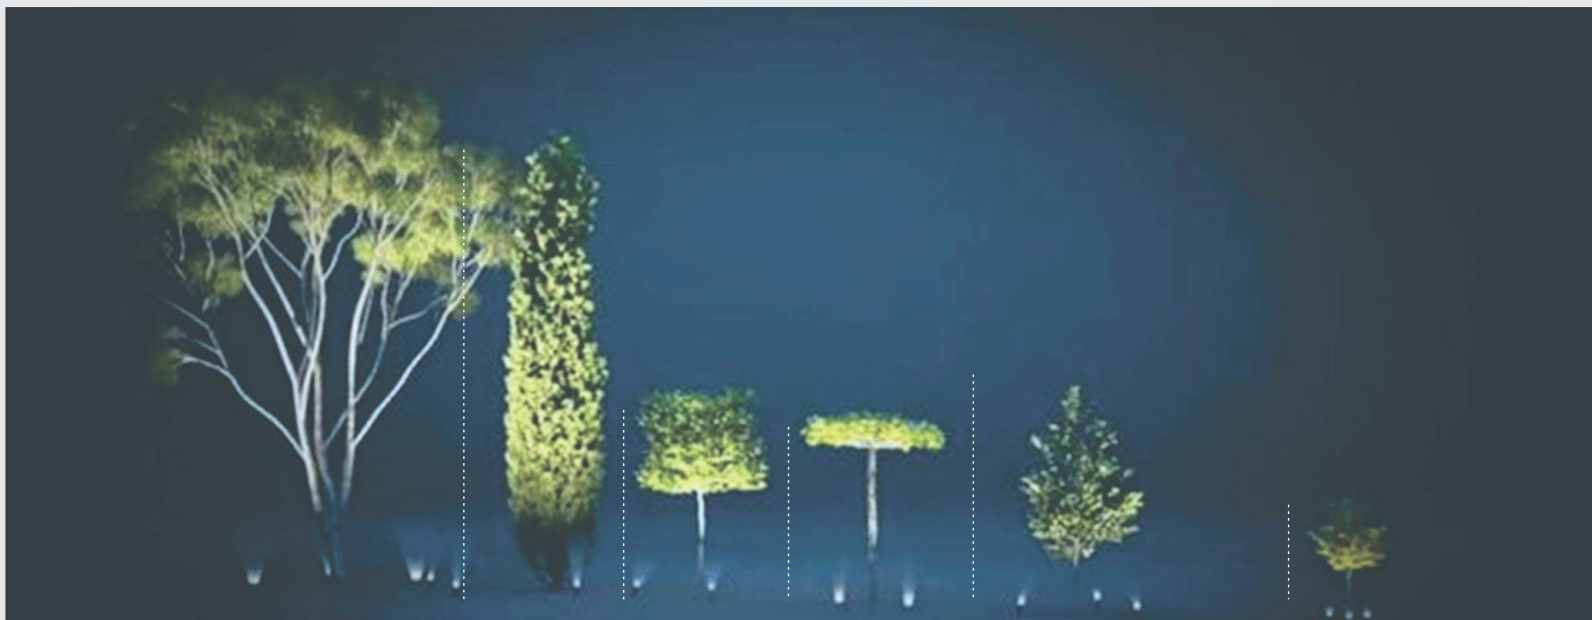

Gardo

Spot Light

Features

- Aluminum Die cast body.
- Electrostatic Pure polyester powder coated.
- Non-Corrosive SS fasteners and toughened glass.
- PMMA optic - Lenses and PC reflector for better beaming control.
- Available in three different beam angles to meet the desired directional spot and flood light illumination affect.
- High Power LED used having narrow, medium, wide beam options.
- Additional accessories like Anti glare hood, Extra-long earth spike, tree strap, Honey comb louver, IP68 cable gland.
- Product supplied pre-wired cable gland compliance to IP67 rating.





Applications

- Landscape
- Column
- Pillars
- Hardscape
- Uplighter



Specification

Model	NL 4305	NL 4306	NL 4309	NL 4301	NL 4302
Power (W)	3W/5W	10W	8W	11W	15W/20W
Color Temperature (CCT)	3000K	3000K	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Lens	Reflector	Reflector	Reflector
Beam Angle	6°/ 25°	6°/ 25°	15°/ 25°/ 38°/ 60°	15°/ 25°/ 38°/ 60°	20°/ 30°/ 40°/ 60°
Housing	Aluminum Die Cast				
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 35mm/H : 105mm	D : 60mm/H : 75mm	D : 60mm/H : 105mm	D : 62mm/H : 145mm	D : 82mm/H : 175mm

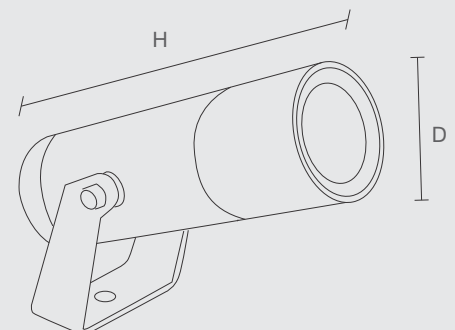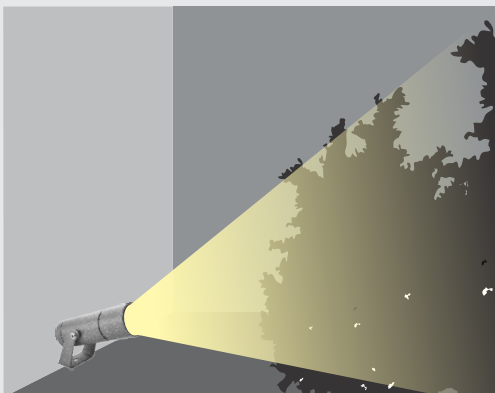

Outdoor Architectural Lighting



Gardo

Landscape Lighting

Designed to illuminate for Landscape, Squares, Facade & high comfort, efficiency with lighting flexibility.

Gardo

Landscape Lighting

Features

- Aluminum Die cast body.
- Electrostatic Pure polyester powder coated.
- Non-Corrosive SS fasteners and toughened glass.
- PMMA optic - Lenses and PC reflector for better beaming control.
- Available in three different beam angles to meet the desired directional spot and flood light illumination affect.
- COB LED used having narrow, medium, wide beam options.
- Additional accessories like Anti glare hood, Extra-long earth spike, tree strap, Honey comb louver, IP68 cable gland.
- Product supplied pre-wired cable gland compliance to IP67 rating.



NL 4308



Applications

- Landscape
- Column
- Pillars
- Hardscape
- Uplighter




Specification

Model	NL 4310	NL 4307	NL 4308
Power (W)	10W	8W/11W	15W/20W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	6°/ 25°	15°/ 25°/ 38°/ 60°	20°/ 30°/ 40°/ 60°
Housing	Aluminum Die Cast		
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60x60mm/H : 105mm	D : 62x62mm/H : 145mm	D : 82x82mm/H : 175mm

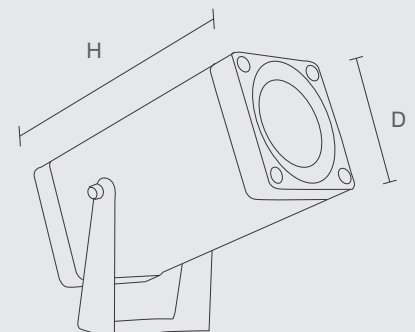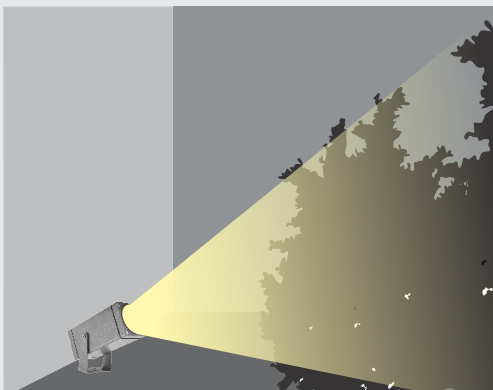



Outdoor Architectural Lighting

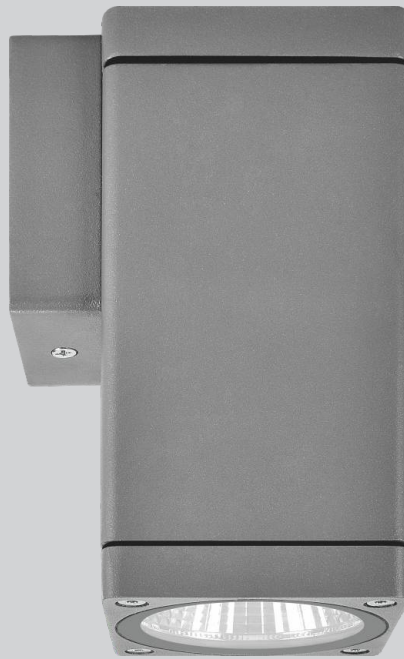

Kubo-Wall

One Way Light

The Aluminum Die-Cast Body Ensures a durable and robust construction. Hi-Power SMD LED: Provides an extra-wide illumination angle for broad and effective lighting coverage. Non-Corrosive SS Fasteners: Guarantees long-term reliability and resistance to rust and corrosion.

Toughened Glass: Adds durability and impact resistance to the light fixture. Pre-Wired Cable Gland: Compliant with IP67 rating for excellent protection against dust and water ingress. Silicon Gasket: Enhances weather resistance and ensures a secure seal, preventing moisture from entering the fixture.

Kubo-Wall

One Way Light

The KUBO Wall One Way Light is a sleek, wall-mounted luminary designed specifically for facade lighting. Key features include Up/Down Lighting Effects: Provide versatile illumination with options for both upward and downward light distribution. Aesthetically Designed: Offers a modern and elegant look, enhancing the visual appeal of any facade. Fully Shielded Light Source: Ensures directed lighting while minimizing glare and light spill. High Luminous Efficiency: Delivers bright, effective illumination with minimal energy consumption. Longer Product Life: Designed for durability and extended use, reducing the need for frequent replacements. The KUBO is ideal for highlighting building exteriors and creating stylish lighting effects on walls.

Aluminum Die-Cast Body: Ensures a durable and robust construction. Hi-Power SMD LED: Provides an extra-wide illumination angle for broad and effective lighting coverage. Non-Corrosive SS Fasteners: Guarantees long-term reliability and resistance to rust. Toughened Glass: Adds durability and impact resistance to the light fixture. Pre-Wired Cable Gland: Compliant with IP67 rating for excellent protection against dust and water ingress. Silicon Gasket: Enhances weather resistance and ensures a secure seal, preventing moisture from entering the fixture. These features collectively ensure that the Cubic Wall Up/Down Light is both functional and resilient, ideal for various outdoor lighting applications.



NL 4121



NL 4032



NL 4042



NL 4132



NL 4135



NL 4138



NL 4124



NL 4035



NL 4045

Kubo-Wall

One Way Light

Features

- Aluminium Die Cast body
- PC Reflector & Len's for better beam control
- COB LED used having narrow, medium, wide beam options.
- Non-corrosive SS fasteners and toughened glass.
- Pre-Wired Cable Gland

Applications

- Residential
- Building facade
- Commercial centres
- Passages
- High light the columns





NL 4042



Specification

Model	NL 4121	NL 4032	NL 4042
Power (W)	6W	8W	15W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	6° / 25°	15° / 25° / 38° / 60°	20° / 30° / 40° / 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60mm/H : 100mm	D : 60mm/H : 120mm	D : 82mm/H : 160mm

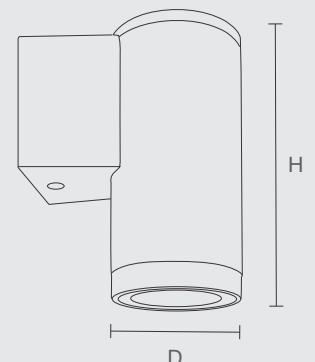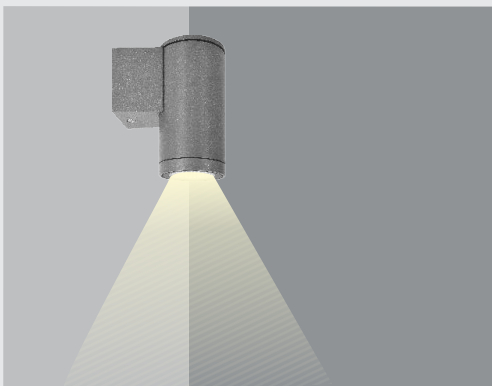

Kubo-Wall


One Way Light

Features

- Aluminium Die Cast body
- PC Reflector & Len's for better beam control
- COB LED used having narrow, medium, wide beam options.
- Non-corrosive SS fasteners and toughened glass.
- Pre-Wired Cable Gland

Applications

- Residential
- Building facade
- Commercial centres
- Passages
- High light the columns





NL 4035



Specification

Model	NL 4124	NL 4035	NL 4045
Power (W)	6W	8W	15W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	6° / 25°	15° / 25° / 38° / 60°	20° / 30° / 40° / 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60x60mm/H : 100mm	D : 62x62mm/H : 140mm	D : 82x82mm/H : 175mm

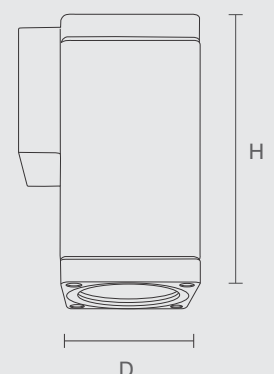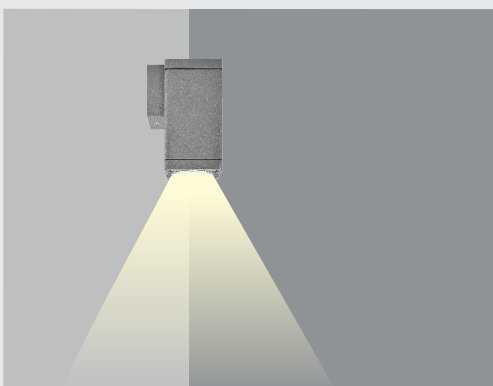

Kubo-Wall

One Way Light

Features

- Aluminium Die Cast body
- PC Reflector & Len's for better beam control
- COB LED used having narrow, medium, wide beam options.
- Non-corrosive SS fasteners and toughened glass.
- Pre-Wired Cable Gland

Applications

- Residential
- Building facade
- Commercial centres
- Passages
- High light the columns





NL 4135




Specification

Model	NL 4132	NL 4135	NL 4138
Power (W)	18W	24W	32W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Reflector	Reflector	Reflector
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 100mm H : 200mm	D : 140mm H : 250mm	D : 165mm H : 300mm

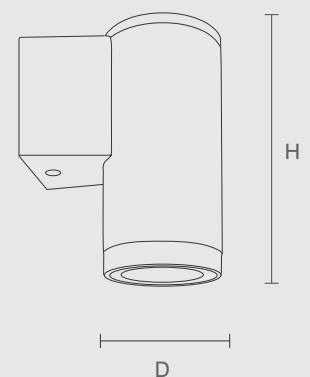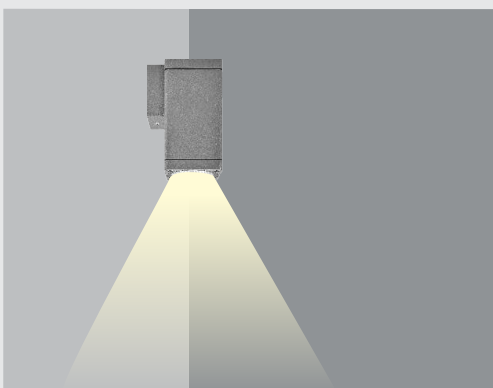



Outdoor Architectural Lighting

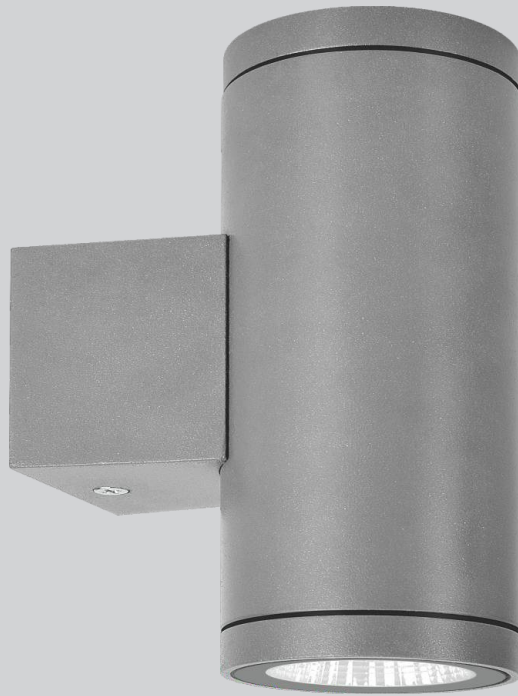

Kubic-Wall

Up-Down Light

The Aluminum Die-Cast Body Ensures a durable and robust construction. Hi-Power SMD LED: Provides an extra-wide illumination angle for broad and effective lighting coverage. Non-Corrosive SS Fasteners: Guarantees long-term reliability and resistance to rust and corrosion.

Toughened Glass: Adds durability and impact resistance to the light fixture. Pre-Wired Cable Gland: Compliant with IP67 rating for excellent protection against dust and water ingress.

Silicon Gasket: Enhances weather resistance and ensures a secure seal, preventing moisture from entering the fixture.

Kubic-Wall

Up-Down Light

The Kubic Wall Up/Down Light includes the following features:

Aluminum Die-Cast Body: Ensures a durable and robust construction. **Hi-Power SMD LED:** Provides an extra-wide illumination angle for broad and effective lighting coverage. **Non-Corrosive SS Fasteners:** Guarantees long-term reliability and resistance to rust and corrosion.


Toughened Glass: Adds durability and impact resistance to the light fixture.

Pre-Wired Cable Gland: Compliant with IP67 rating for excellent protection against dust and water ingress. **Silicon Gasket:** Enhances weather resistance and ensures a secure seal, preventing moisture from entering the fixture.


The Kubic Wall Up/Down Light Ideal for enhancing the lighting in residential gardens & yards, providing both functional illumination & aesthetic appeal. **Driveways and Entrances:** Ensures safe and attractive lighting for driveways and home entrances, enhancing visibility & security.



NL 4122



NL 4033



NL 4043




NL 4125




NL 4036



NL 4046



NL 4133



NL 4136



NL 4139

Kubic-Wall


Up-Down Light

Features

- Aluminium Die Cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners and toughened glass.
- Toughened Glass
- Silicon gasket

Applications

- Residential: Garden and Yard Lighting
- Building Facade: Architectural Highlighting
- Passages: Walkways and Corridors
- Public Spaces
- Pathways Garden and Landscape Paths
- Sculptures and Structures: Artistic Lighting


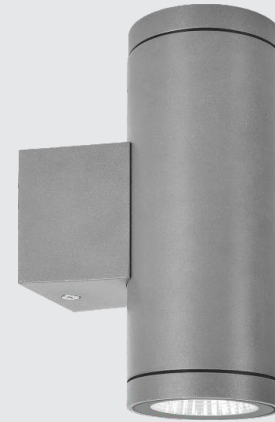


NL 4033



Specification

Model	NL 4122	NL 4033	NL 4043
Power (W)	2x6W	2x6W	2x13W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	6° / 25°	15° / 25° / 38° / 60°	20° / 30° / 40° / 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60mm/H : 125mm	D : 60mm/H : 180mm	D : 82mm/H : 215mm

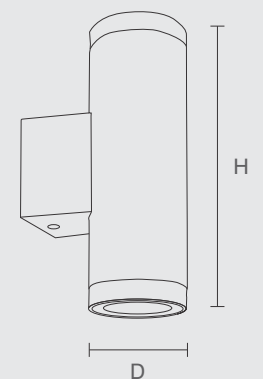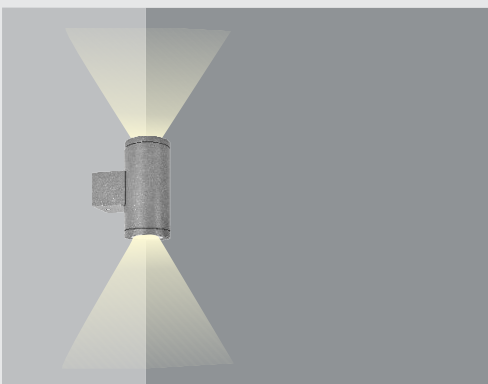

Kubic-Wall

Up-Down Light

Features

- Aluminium Die Cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners and toughened glass.
- Toughened Glass
- Silicon gasket

Applications

- Residential: Garden and Yard Lighting
- Building Facade: Architectural Highlighting
- Passages: Walkways and Corridors
- Public Spaces
- Pathways Garden and Landscape Paths
- Sculptures and Structures: Artistic Lighting





NL 4036



Specification

Model	NL 4125	NL 4036	NL 4046
Power (W)	2x6W	2x6W	2x13W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	6° / 25°	15° / 25° / 38° / 60°	20° / 30° / 40° / 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60x60mm H : 125mm	D : 62x62mm H : 175mm	D : 82x82mm H : 215mm

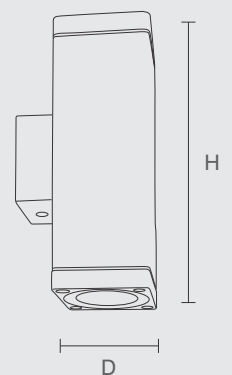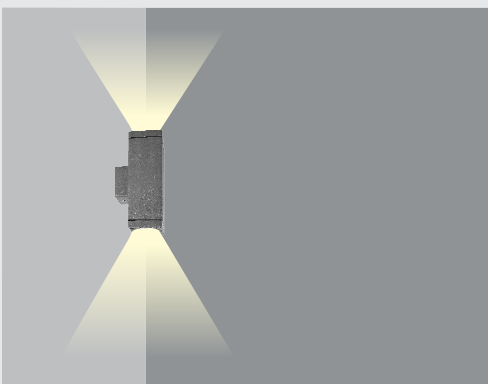

Kubic-Wall

Up-Down Light

Features

- Aluminium Die Cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners and toughened glass.
- Toughened Glass
- Silicon gasket

Applications

- Residential: Garden and Yard Lighting
- Building Facade: Architectural Highlighting
- Passages: Walkways and Corridors
- Public Spaces
- Pathways Garden and Landscape Paths
- Sculptures and Structures: Artistic Lighting





NL 4136




Specification

Model	NL 4133	NL 4136	NL 4139
Power (W)	2x18W	2x24W	2x32W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 100mm/H : 350mm	D : 140mm/H : 400mm	D : 165mm/H : 500mm

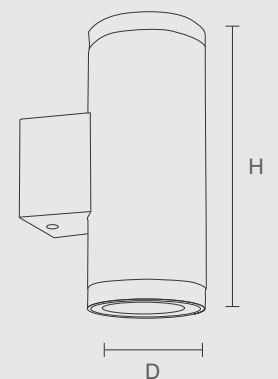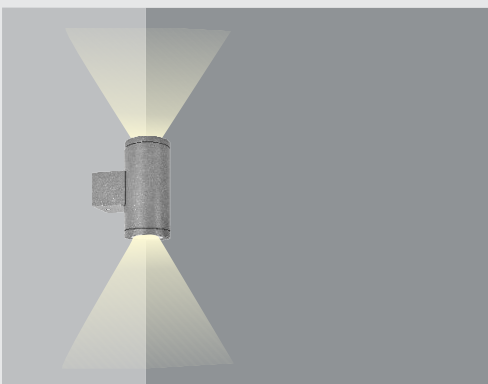

Outdoor Architectural Lighting

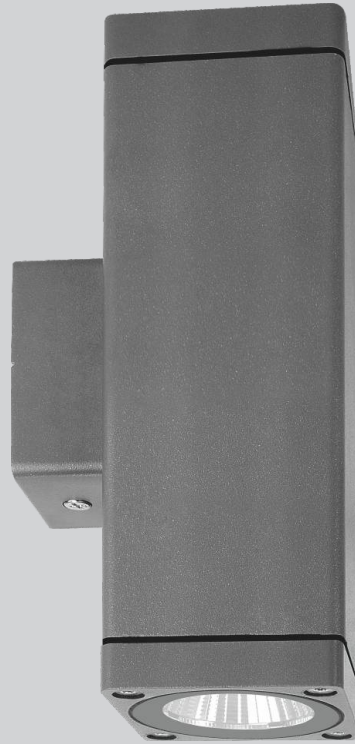

Kubic-Wall

Wall Up-Down Light

The Aluminum Die-Cast Body Ensures a durable and robust construction. Hi-Power SMD LED: Provides an extra-wide illumination angle for broad and effective lighting coverage. Non-Corrosive SS Fasteners: Guarantees long-term reliability and resistance to rust and corrosion.

Toughened Glass: Adds durability and impact resistance to the light fixture. Pre-Wired Cable Gland: Compliant with IP67 rating for excellent protection against dust and water ingress.

Silicon Gasket: Enhances weather resistance and ensures a secure seal, preventing moisture from entering the fixture.

Kubic-Wall


Up-Down Light

Features

- Aluminium Die Cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners and toughened glass.
- Toughened Glass
- Silicon gasket

Applications

- Residential: Garden and Yard Lighting
- Building Facade: Architectural Highlighting
- Passages: Walkways and Corridors
- Public Spaces
- Pathways Garden and Landscape Paths
- Sculptures and Structures: Artistic Lighting


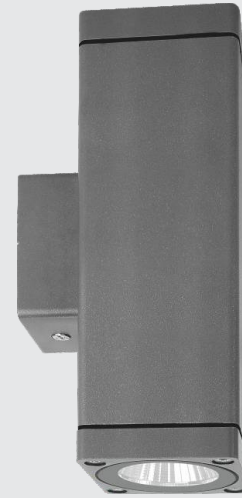


NL 4136



Specification

Model	NL 4125	NL 4036	NL 4046
Power (W)	2x6W	2x6W	2x13W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	6°/ 25°	15°/ 25°/ 38°/ 60°	20°/ 30°/ 40°/ 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60x60mm/H : 125mm	D : 62x62mm/H : 175mm	D : 82x82mm/H : 215mm

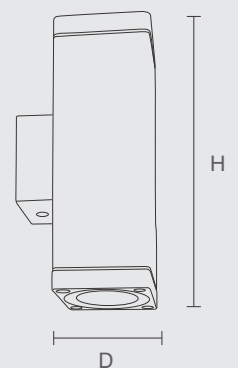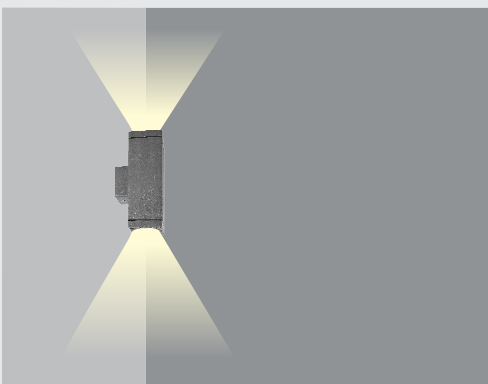



Outdoor Architectural Lighting

NIRVANALIGHT[®]
Enlighten Your Life



Okio

Ceiling Surface Light

The OKIO Ceiling Surface Light boasts several high-quality features designed to enhance its performance, durability, and versatility

Okio

Ceiling Surface Light



NL 4031



NL 4041

The OKIO Ceiling Surface Light is a type of modern lighting fixture designed to be mounted directly onto the ceiling. It typically features a sleek, minimalist design, making it suitable for contemporary interiors. Surface lights like the OKIO are often used in areas where recessed lighting isn't possible or desirable. They provide ample illumination without taking up much space, making them ideal for rooms with low ceilings or where a clean, unobtrusive look is preferred.

The body of the light is made from aluminium die-cast, ensuring a strong, lightweight, and durable structure. This material also provides excellent heat dissipation, which helps to extend the life of the LED components.

Okio

Ceiling Surface Light

Features

- Aluminium Die Cast body
- PMMA Len's for the better beam control
- High-Power LED with Multiple Beam Options
- Non-Corrosive SS Fasteners and Toughened Glass
- IP67 Rating with Pre-Wired Cable Gland.

Applications

- Residential Spaces
- Lobbies & Foyers: Public and Private Buildings
- Retail Sector: Stores and Showrooms
- Corporate: Office Buildings
- Commercial & Business Centers: Multi-purpose Spaces
- Passages & Corridors: Indoor and Outdoor Pathways




NL 4031



Specification

Model	NL 4031	NL 4041
Power (W)	6W	8W
Color Temperature (CCT)	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	Lens	Lens
Beam Angle	6° / 25°	24° / 40°
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 50mm/H : 65mm	D : 60mm/H : 75mm

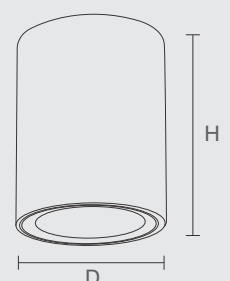



Outdoor Architectural Lighting



Guide

Ceiling Surface Light

The ceiling-mounted surface light, particularly for entrance, parapet, and facade lighting applications, comes with the following robust features designed to enhance its performance, durability, and visual appeal.

GUIDE

Ceiling Surface Light



NL 4123




NL 4034



NL 4044



NL 4126



NL 4037



NL 4047



NL 4134



NL 4137



NL 4140

The OKIO Ceiling Surface Light is a type of modern lighting fixture designed to be mounted directly onto the ceiling. It typically features a sleek, minimalist design, making it suitable for contemporary interiors. Surface lights like the OKIO are often used in areas where recessed lighting isn't possible or desirable. They provide ample illumination without taking up much space, making them ideal for rooms with low ceilings or where a clean, unobtrusive look is preferred.

The body of the light is made from aluminium die-cast, ensuring a strong, lightweight, and durable structure. This material also provides excellent heat dissipation, which helps to extend the life of the LED components.

Guide

Ceiling Surface Light

Features

- Aluminum Die-Cast Body: Durability and Strength
- Corrosion Resistance
- PC Reflector
- High-Power LED with Narrow, Medium, and Wide Beam Options: Versatility in Lighting
- Energy Efficiency
- Non-Corrosive SS Fasteners and Toughened Glass: Stainless Steel (SS) Fasteners

Applications

- Residential Spaces
- Educational Institutions
- Public and Private Buildings
- Office Buildings
- Multi-purpose Commercial Spaces
- Indoor and Outdoor Pathways




NL 4123



Specification

Model	NL 4123	NL 4034	NL 4044
Power (W)	8W	8W / 11W	15W / 20W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	6°/ 25°	15°/ 25°/ 38°/ 60°	20°/ 30°/ 40°/ 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60mm/H : 100mm	D : 60mm/H : 120mm	D : 82mm/H : 160mm

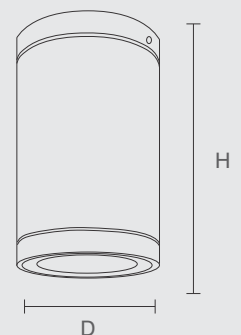

Guide

Ceiling Surface Light

Features

- Aluminum Die-Cast Body: Durability and Strength
- Corrosion Resistance
- PC Reflector
- High-Power LED with Narrow, Medium, and Wide Beam Options: Versatility in Lighting
- Energy Efficiency
- Non-Corrosive SS Fasteners and Toughened Glass: Stainless Steel (SS) Fasteners

Applications

- Residential Spaces
- Educational Institutions
- Public and Private Buildings
- Office Buildings
- Multi-purpose Commercial Spaces
- Indoor and Outdoor Pathways



NL 4137



Specification

	NL 4134	NL 4137	NL 4140
Model	NL 4134	NL 4137	NL 4140
Power (W)	18W	24W/32W/36W	32W/36W/45W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Reflector	Reflector	Reflector
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 100mm/H : 200mm	D : 140mm/H : 250mm	D : 160mm/H : 300mm



NL 4134



NL 4137



NL 4140

Outdoor Architectural Lighting



Guide

Ceiling Surface Light

Ceiling-mounted surface lights are designed for entrances, parapets, and facade lighting.

Guide

Ceiling Surface Light

Features

- Aluminum Die-Cast Body: Durability and Strength
- Corrosion Resistance
- PC Reflector
- High-Power LED with Narrow, Medium, and Wide Beam Options: Versatility in Lighting
- Energy Efficiency
- Non-Corrosive SS Fasteners and Toughened Glass: Stainless Steel (SS) Fasteners

Applications

- Residential Spaces
- Educational Institutions
- Public and Private Buildings
- Office Buildings
- Multi-purpose Commercial Spaces
- Indoor and Outdoor Pathways





NL 4047



Specification

Model	NL 4126	NL 4037	NL 4047
Power (W)	8W	8W / 11W	15W / 20W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	6° / 25°	15° / 25° / 38° / 60°	20° / 30° / 40° / 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60x60mm/H : 100mm	D : 62x62mm/H : 140mm	D : 82x82mm/H : 175mm

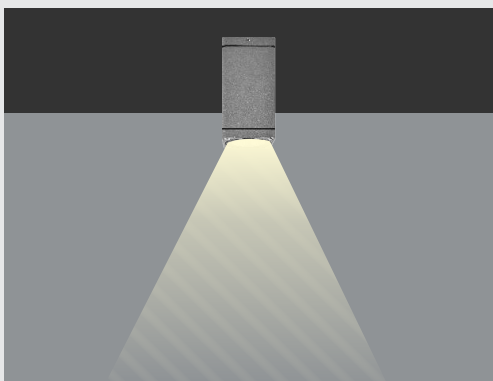



Outdoor Architectural Lighting



Gleam Series

In-Ground Lighting

The Gleam Series of in-ground lights is engineered to provide both functional and aesthetic illumination for various outdoor environments. These lights are perfect for illuminating walkways, driveways, gardens, and other outdoor areas, adding safety, security, and beauty to any space.

Gleam Series

In-Ground Lighting

Ideal for lining walkways in gardens, parks, and residential areas, providing safe and attractive illumination for pedestrians. Driveways: Enhances the safety and visibility off driveways, helping to guide vehicles and prevent accidents. Garden Landscaping: Used to highlight specific features in gardens, such as trees, shrubs, or water features, creating a dramatic and inviting ambiance

The Gleam Series of in-ground lights is engineered to provide both functional and aesthetic illumination for various outdoor environments. These lights are perfect for illuminating walkways, driveways, gardens, and other outdoor areas, adding safety, security, and beauty to any space.

GLEAM SERIES



NL 4505



NL 4509



NL 4510



NL 4511

Gleam Series

In-Ground Lighting

Features

- Walkways and Pathways
- Driveways
- Garden Landscaping
- Outdoor Patios and Decks
- Commercial and Public Spaces

Applications

- Walkways and Pathways
- Driveways
- Garden Landscaping
- Outdoor Patios and Decks
- Commercial and Public Spaces



NL 4509



Specification


Model	NL 4505	NL 4509
Power (W)	5W	10W
Color Temperature (CCT)	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	6°/ 25°	6°/ 25°
Housing	SS Top Ring & Aluminum Die Cast Body	
Finish	SS	SS
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 55mm/H : 86mm/HJ : 110mm	D : 85mm/H : 90mm/HJ : 115mm



Accessories



Outer Housing

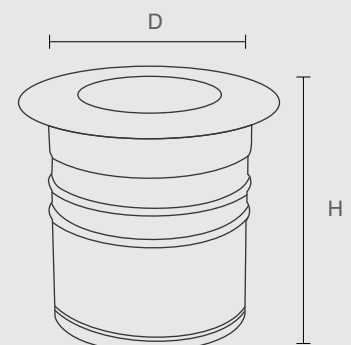

Gleam Series

In-Ground Lighting

Features

- Walkways and Pathways
- Driveways
- Garden Landscaping
- Outdoor Patios and Decks
- Commercial and Public Spaces

Applications

- Walkways and Pathways
- Driveways
- Garden Landscaping
- Outdoor Patios and Decks
- Commercial and Public Spaces




NL 4511



Specification


Model	NL 4510	NL 4511
Power (W)	5W	8W
Color Temperature (CCT)	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	1 Way	2 Way
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	SS	SS
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 75mm / H : 86mm / HJ : 100mm	D : 75mm / H : 86mm / HJ : 100mm

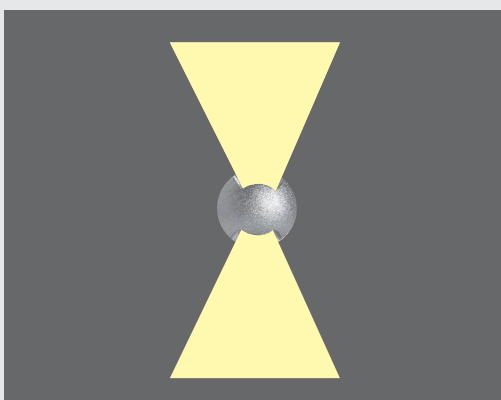

Accessories



Outer Housing





Outdoor Architectural Lighting



Lucia

Floor Washer / Flood Light

The Lucia Series outdoor LED floor washer and flood light is designed for a wide range of exterior applications, offering robust construction and high performance in various outdoor environments. These lights are ideal for creating safe, well-lit pathways and landscapes, enhancing the aesthetics and functionality of outdoor spaces.

Lucia

Floor Washer / Flood/ Foot Light

LUCIA



NL 4501



NL 4501A



NL 4502



NL 4501B



NL 4501C




NL 4501D




NL 4029

Lucia - Outdoor LED Floor Washer suitable for exterior landscape, pathway, corridor, external building periphery, ramp, and parking lot area. Aluminium die-cast housing with high resistance against corrosion pre-treated with POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather .

LORENZA WALL SURFACE



NL 4203



NL 4204



NL 4205




NL 4206


WALL RECESSED



NL 4208



NL 4209



NL 4210



NL 4211

The Lorenza outdoor LED floor washer and foot light is designed to provide robust and efficient lighting for various exterior applications. Its durable construction and high-performance features make it suitable for a range of outdoor settings.

Lucia

Floor Washer / Flood Light

Features

- Aluminum Die-Cast Body: Durability
- High-Power LED for Better Output Luminous: Enhanced Brightness
- Energy Efficiency.
- Non-Corrosive Stainless Steel Fasteners and Toughened Glass: Stainless Steel Fasteners.
- Pre-Wired Cable Gland Compliance to IP67 Rating: Weatherproof Design.
- Mounting Jacket/Sleeve Included: Installation Flexibility


Applications

- Pathway and Corridor Lighting: Safety and Visibility
- External Building Periphery: Security Lighting
- Ramps and Parking Lot Areas: Functional Illumination.



Specification


Model	NL 4501	NL 4501 A	NL 4502
Power (W)	3W	3W	6W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	High power LED	High power LED	High power LED
Beam Angle	Diffused	Diffused	Diffused
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	White	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 50mm/H : 70mm/HJ :95mm	D : 50mm/H : 70mm/HJ :95mm	D : 65mm/H : 70mm/HJ :95mm

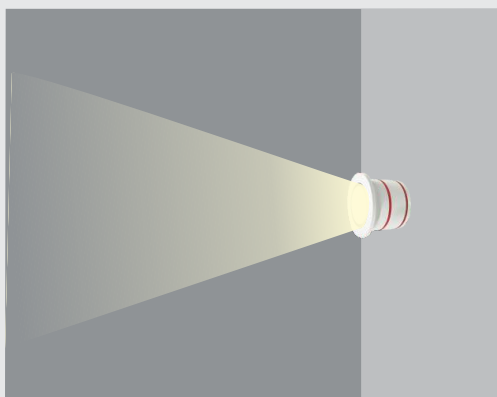

Accessories



Outer Housing

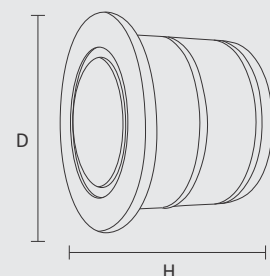

Lucia

Floor Washer / Flood Light

Features

- Aluminum Die-Cast Body: Durability
- High-Power LED for Better Output Luminous: Enhanced Brightness
- Energy Efficiency.
- Non-Corrosive Stainless Steel Fasteners and Toughened Glass: Stainless Steel Fasteners.
- Pre-Wired Cable Gland Compliance to IP67 Rating: Weatherproof Design.
- Mounting Jacket/Sleeve Included: Installation Flexibility




NL 4501B



NL 4501C



NL 4501D



NL 4029

Applications

- Pathway and Corridor Lighting: Safety and Visibility
- External Building Periphery: Security Lighting
- Ramps and Parking Lot Areas: Functional Illumination.



Specification

Model	NL 4501 B	NL 4501 C	NL 4501 D	NL 4029
Power (W)	3W	3W	3W	3W
Color Temperature (CCT)	3000K	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	High power LED	High power LED	High power LED	High power LED
Beam Angle	Forward Throw	Diffused	Diffused	Asymmetric
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 50mm H : 70mm HJ :95mm	D : 50mm H : 70mm HJ :95mm	D : 50mm H : 70mm HJ :95mm	D : 65mm H : 65mm HJ :90mm



Outdoor Architectural Lighting



Lorenza

Floor Washer / Foot Light

The Lorenzo outdoor LED floor washer and foot light is designed to provide robust and efficient lighting for various exterior applications. Its durable construction & high-performance features make it suitable for a range of outdoor settings.

Lorenza


Floor Washer / Flood Light Surface Mounted

Features


- Aluminium die cast body
- Corrosion Resistance
- Polymerization Pre-Treatment: Enhanced Protection
- Weatherproof Design
- Hi-power LED used for better output luminous.
- Energy Efficiency
- Pathways and Corridors
- Applications: Exterior Landscape

Applications

- Exterior Landscape: Garden and Yard Lighting
- Pathways and Corridors: Walkway Lighting
- Ramps and Parking Lots: Safety Lighting




NL 4203



NL 4204



NL 4205





NL 4206



Specification

Model	NL 4203	NL 4204	NL 4205	NL 4206
Power (W)	8W	8W	8W	8W
Color Temperature (CCT)	3000K	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED	LED
Beam Angle	Asymmetrical	Asymmetrical	Asymmetrical	Asymmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 100mm H : 32mm	D : 100x100mm H : 32mm	D : 105x75mm H : 32mm	D : 75x105mm H : 32mm

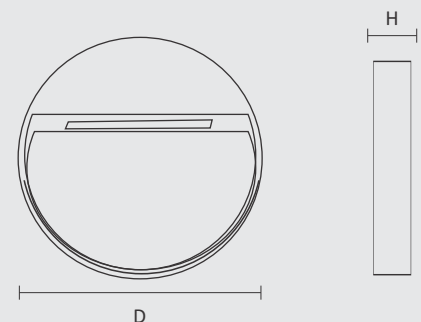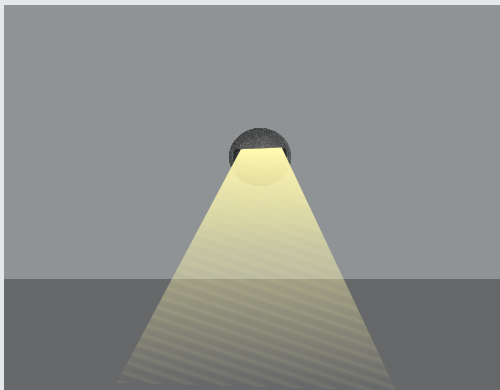

Lorenza


Floor Washer / Flood Light Recessed Mounted

Features


- Aluminium die cast body
- Corrosion Resistance
- Polymerization Pre-Treatment: Enhanced Protection
- Weatherproof Design
- Hi-power LED used for better output luminous.
- Energy Efficiency
- Pathways and Corridors
- Applications: Exterior Landscape

Applications


- Exterior Landscape: Garden and Yard Lighting
- Pathways and Corridors: Walkway Lighting
- Ramps and Parking Lots: Safety Lighting




NL 4208



NL 4209



NL 4210





NL 4211



Specification

Model	NL 4208	NL 4209	NL 4210	NL 4211
Power (W)	8W	8W	8W	8W
Color Temperature (CCT)	3000K	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED	LED
Beam Angle	Asymmetrical	Asymmetrical	Asymmetrical	Asymmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 115mm H : 50mm	D : 115x115mm H : 50mm	D : 120x90mm H : 50mm	D : 90x120mm H : 50mm

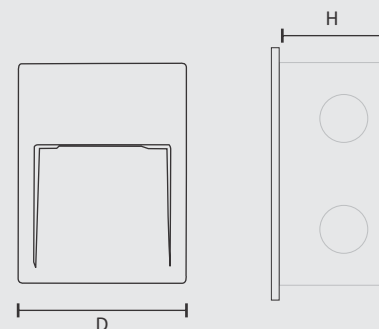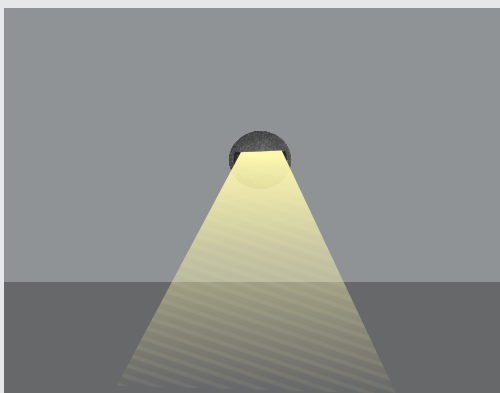



Outdoor Architectural Lighting



Nuvo-NL 100

Bollard Light

The Nuvo bollard LED garden and pathway luminaries are designed to provide effective, glare-free illumination for various outdoor spaces. With a robust construction and specialized features, these luminaries enhance safety and aesthetics in gardens, pathways, and public area lighting.


Nuvo-NL 100

Bollard Light

Aluminium Housing: High Corrosion Resistance: The bollard is constructed from high-quality aluminium, which provides excellent resistance to corrosion. This makes it suitable for use in diverse environmental conditions, ensuring longevity and durability.

Nuvo bollards ensure a comfortable lighting experience. This feature helps in reducing visual discomfort and creating a pleasant environment. **Effective Ground Lighting:** The luminaries are engineered to evenly distribute light across the ground surface, enhancing visibility and safety without causing harsh glare.

The Nuvo bollard LED luminaries offer a blend of durability, aesthetics, and functionality, making them an excellent choice for enhancing lighting in various outdoor settings.

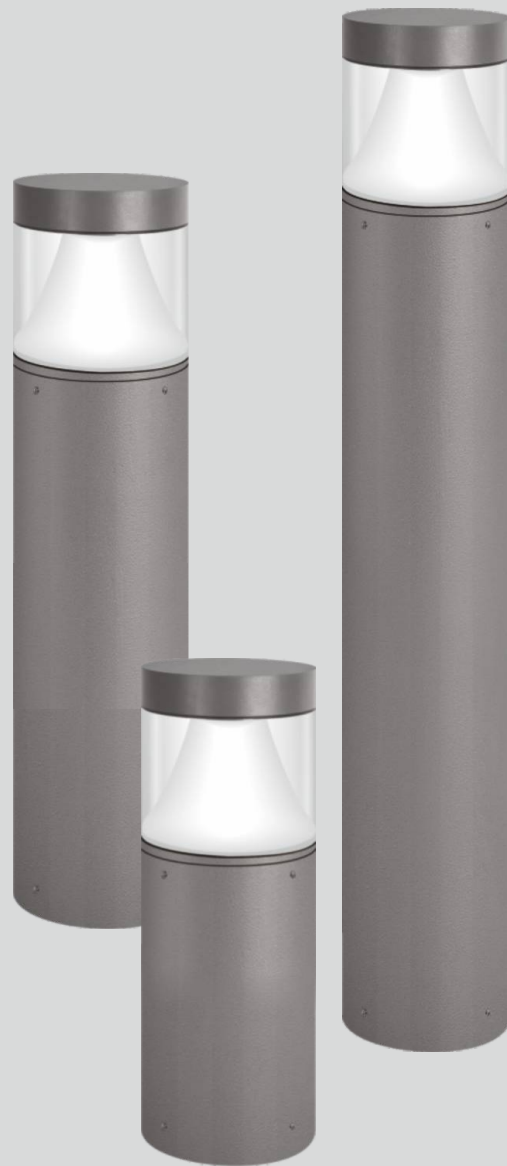

Nuvo-NL 100


Bollard Lights

Features

- Stone Wash Surface Treatment & Enhanced Durability
- Glare-Free Illumination Comfortable Lighting
- Versatile Applications Entrances



Applications

- Entrances
- Footpaths
- Compound Periphery
- Garden and Landscape



Specification

Model	NL 4321	NL 4322	NL 4323	NL 4324	NL 4325
Power (W)	10W/12W	10W/12W	10W/12W	10W/12W	10W/12W
Color Temperature (CCT)	3K/4K/TW	3K/4K/TW	3K/4K/TW	3K/4K/TW	3K/4K/TW
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED	LED	LED
Beam Angle	360°	360°	360°	180°	360°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 100mm H : 300/700/875mm OP: 35mm	D : 100mm H : 365/765/940mm OP: 100mm	D : 100mm H : 330/730/905mm OP: 65mm	D : 100mm H : 330/730/905mm OP: 65mm	D : 100mm H : 365/765/940mm OP: 100mm

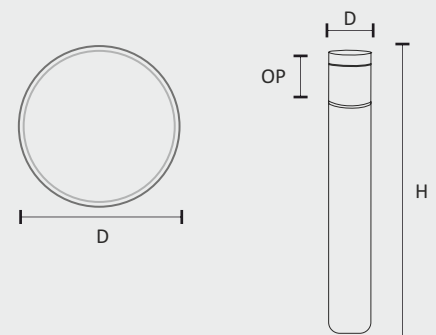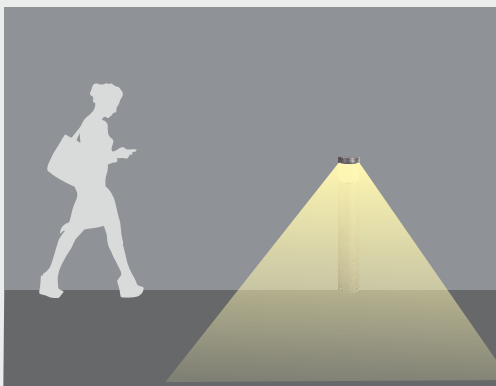

Nuvo-NL 140


Bollard Lights

Features

- Stone Wash Surface Treatment & Enhanced Durability
- Glare-Free Illumination Comfortable Lighting
- Versatile Applications Entrances



Applications

- Entrances
- Footpaths
- Compound Periphery
- Garden and Landscape



Specification

Model	NL 4331	NL 4332	NL 4333	NL 4334	NL 4335
Power (W)	15W/20W	15W/20W	15W/20W	15W/20W	15W/20W
Color Temperature (CCT)	3K/4K/TW	3K/4K/TW	3K/4K/TW	3K/4K/TW	3K/4K/TW
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED	LED	LED
Beam Angle	360°	360°	360°	180°	360°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 140mm H : 300/700/900mm OP: 48mm	D : 140mm H : 350/750/950mm OP: 98mm	D : 140mm H : 315/715/915mm OP: 62mm	D : 140mm H : 315/715/915mm OP: 62mm	D : 140mm H : 350/750/950mm OP: 98mm



Nuvo-NL 165


Bollard Lights

Features

- Stone Wash Surface Treatment & Enhanced Durability
- Glare-Free Illumination Comfortable Lighting
- Versatile Applications Entrances


Applications

- Entrances
- Footpaths
- Compound Periphery
- Garden and Landscape



Specification

Model	NL 4341	NL 4342	NL 4343	NL 4344	NL 4345
Power (W)	20W/24W	20W/24W	20W/24W	20W/24W	20W/24W
Color Temperature (CCT)	3K/4K/TW	3K/4K/TW	3K/4K/TW	3K/4K/TW	3K/4K/TW
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED	LED	LED
Beam Angle	360°	360°	360°	180°	360°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 165mm H : 310/710/910mm OP: 60mm	D : 165mm H : 370/770/970mm OP: 120mm	D : 165mm H : 370/770/970mm OP: 120mm	D : 165mm H : 370/770/970mm OP: 120mm	D : 165mm H : 350/750/950mm OP: 100mm

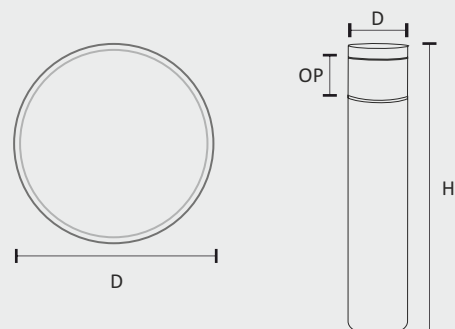

Nuvo-NL 165



Bollard Lights

Features

- Stone Wash Surface Treatment & Enhanced Durability
- Glare-Free Illumination Comfortable Lighting
- Versatile Applications Entrances


Applications

- Entrances
- Footpaths
- Compound Periphery
- Garden and Landscape

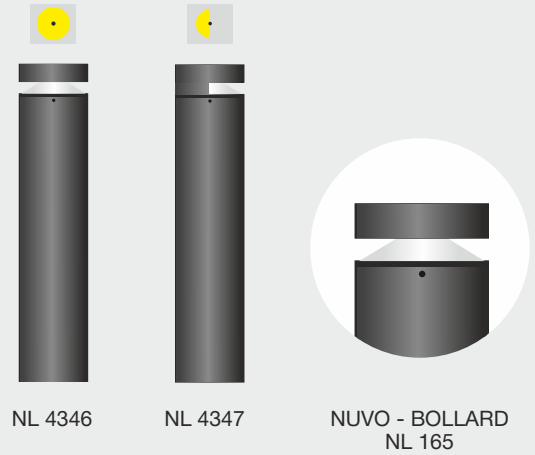


Specification

Model	NL 4346	NL 4347
Power (W)	25W	25W
Color Temperature (CCT)	3K/4K/TW	3K/4K/TW
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	360°	180°
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 165mm H : 375mm/775mm/975mm OP: 75mm	D : 165mm H : 375mm/775mm/975mm OP: 75mm

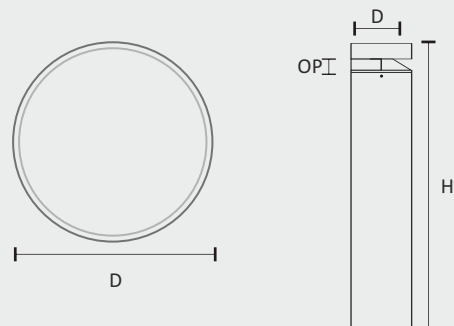



Outdoor Architectural Lighting

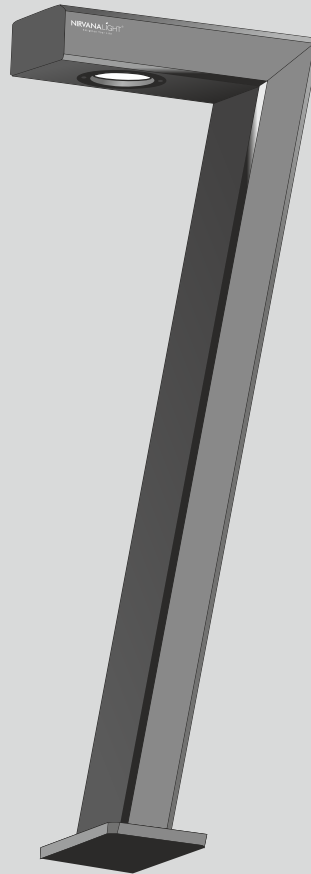

Trend

Bollard Light

The Trend bollard LED luminaires are designed to offer effective, glare-free illumination for a variety of outdoor environments. With robust construction and specialized features, these luminaires enhance both functionality and aesthetics in garden, pathway, and public area lighting.


Trend

Bolard Light

Trend - LED garden and pathway luminaries, Aluminium housing with high corrosion resistance. Stone wash surface treatment prior to painting process. Glare free illumination of ground surface and are perfect for illuminating entrances, footpaths, public area, compound periphery as well as garden and landscape architecture.

High Corrosion Resistance
Constructed from durable aluminium, the bollard luminaries are engineered to resist corrosion, ensuring long-term performance even in challenging weather conditions.

The aluminium material provides a combination of strength and lightweight properties, making it suitable for outdoor use.

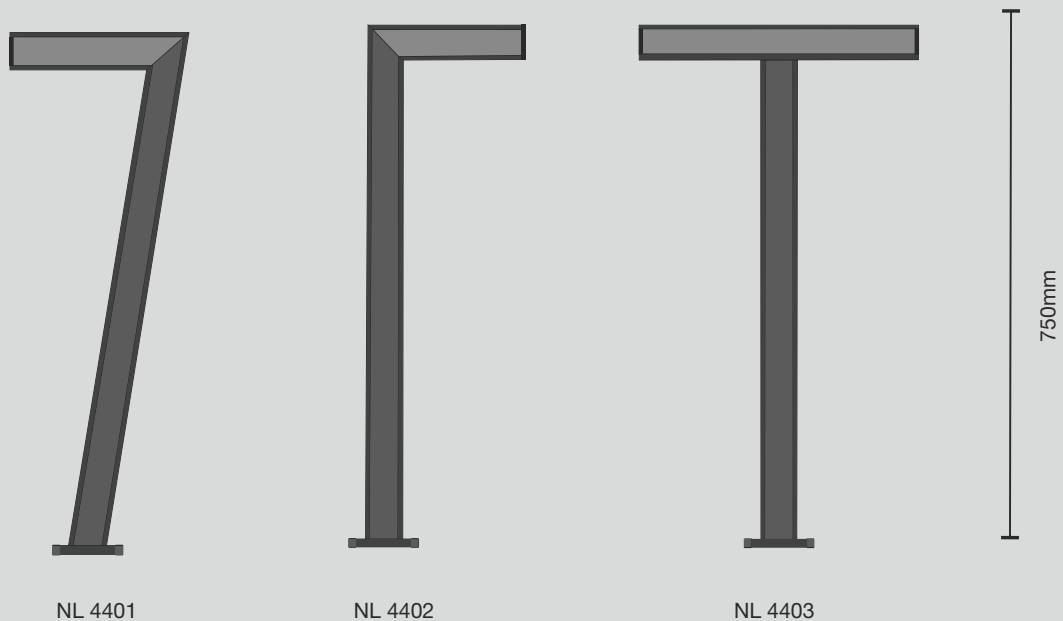

Triend


Bollard Lights

Features


- Aluminium Housing
- Lightweight and Durable
- Stone Wash Surface Treatment
- Aesthetic Finish

Applications

- Driveways - Function
- Pathways - Function
- Flowerbeds - Function
- Entrances - Function
- Squares & Gardens -Function

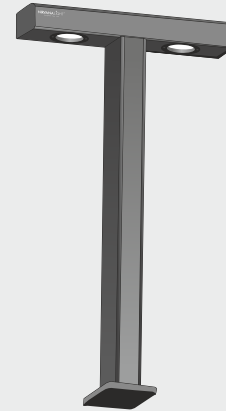


NL 4403




Specification

Model	NL 4401	NL 4402	NL 4403
Power (W)	10W/15W	10W/15W	2x10W/15W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED
Beam Angle	Asymmetrical	Asymmetrical	Asymmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	AL : 225mm/H : 750mm	AL : 225mm/H : 750mm	AL : 400mm/H : 750mm

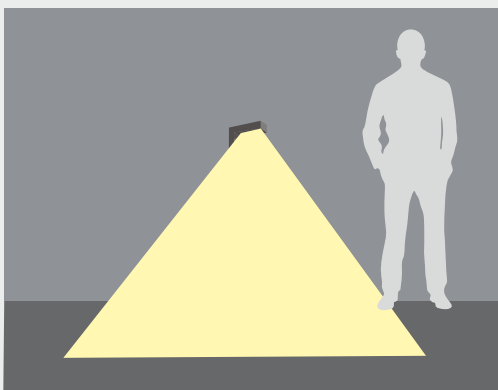

AL

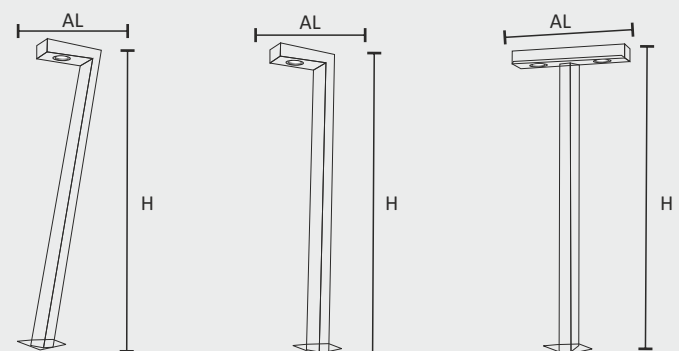

NL 4401

NL 4402

NL 4403

Outdoor Architectural Lighting



Adjustable

Bollard Light

The "Adjustable" bollard from Nirvana Lighting is a versatile lighting solution designed for various outdoor settings. Here's an overview of its features & applications.

Adjustable

Bollard Light


Adjustable Bollards LED garden and pathway luminaries, Aluminium housing with high corrosion resistance. Stone wash surface treatment prior to painting process. Glare free illumination of ground surface and are perfect for illuminating entrances, footpaths, public area, compound periphery as well as garden & landscape architecture.

Allows for customizable light direction, enhancing flexibility in illumination. Energy-efficient & long-lasting, providing effective lighting while conserving energy.


Durable with high corrosion resistance, ensuring longevity even in harsh outdoor environments.



NL 4405

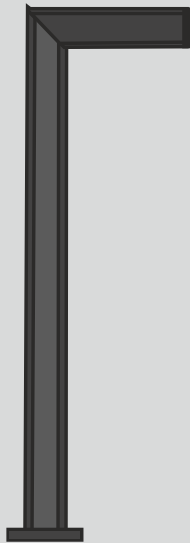

NL 4406

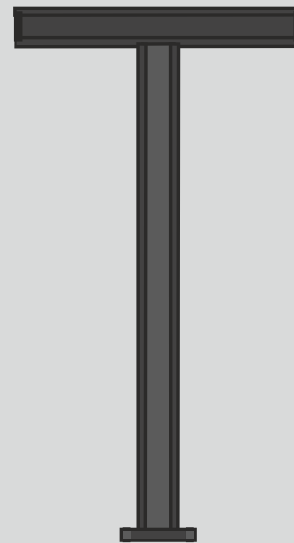

NL 4407



NL 4408

Adjustable Bollard Lights

Features


- Adjustable Design
- LED Technology
- Aluminum Housing
- Stone Wash Surface Treatment
- Glare-Free Illumination

Applications

- Entrances
- Footpaths
- Public Areas
- Compound Periphery
- Garden and Landscape Architecture



NL 4408




Specification


Model	NL 4405	NL 4406	NL 4407	NL 4408
Power (W)	10W/15W	10W/15W	2x10W/15W	10W/15W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED	LED
Beam Angle	Type II	Type II	Type II	Type II
Housing	GI	GI	GI	GI
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	Ip65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	AL : 225mm/H : 750mm	AL : 225mm/H : 750mm	AL : 400mm/H : 750mm	D : 100x100mm/H : 750mm




NL 4405

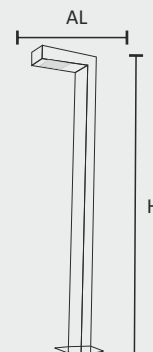


NL 4406

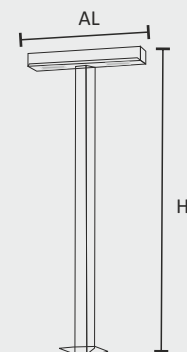


NL 4407

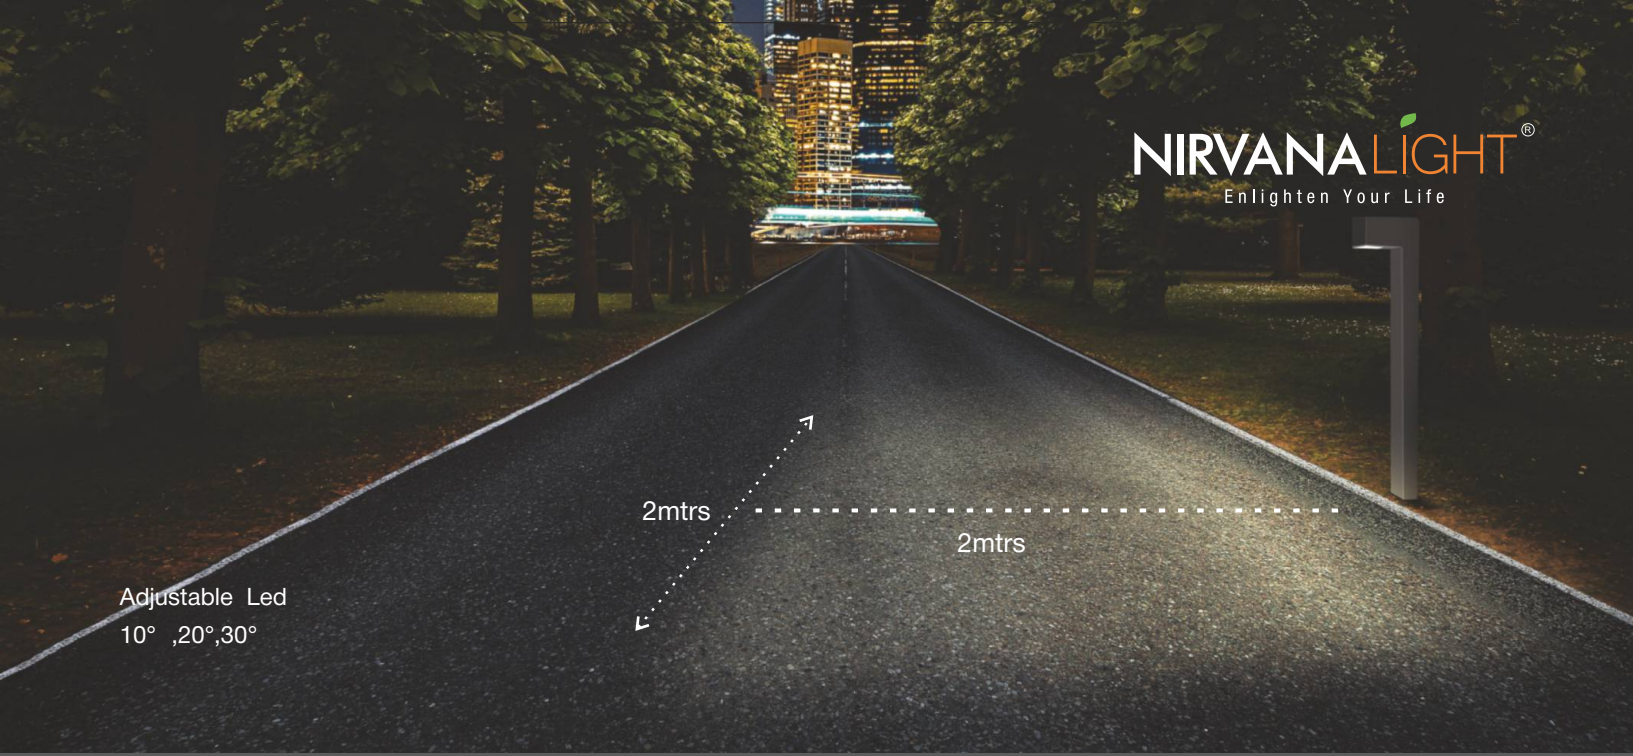

Adjustable Led
10° ,20° ,30°

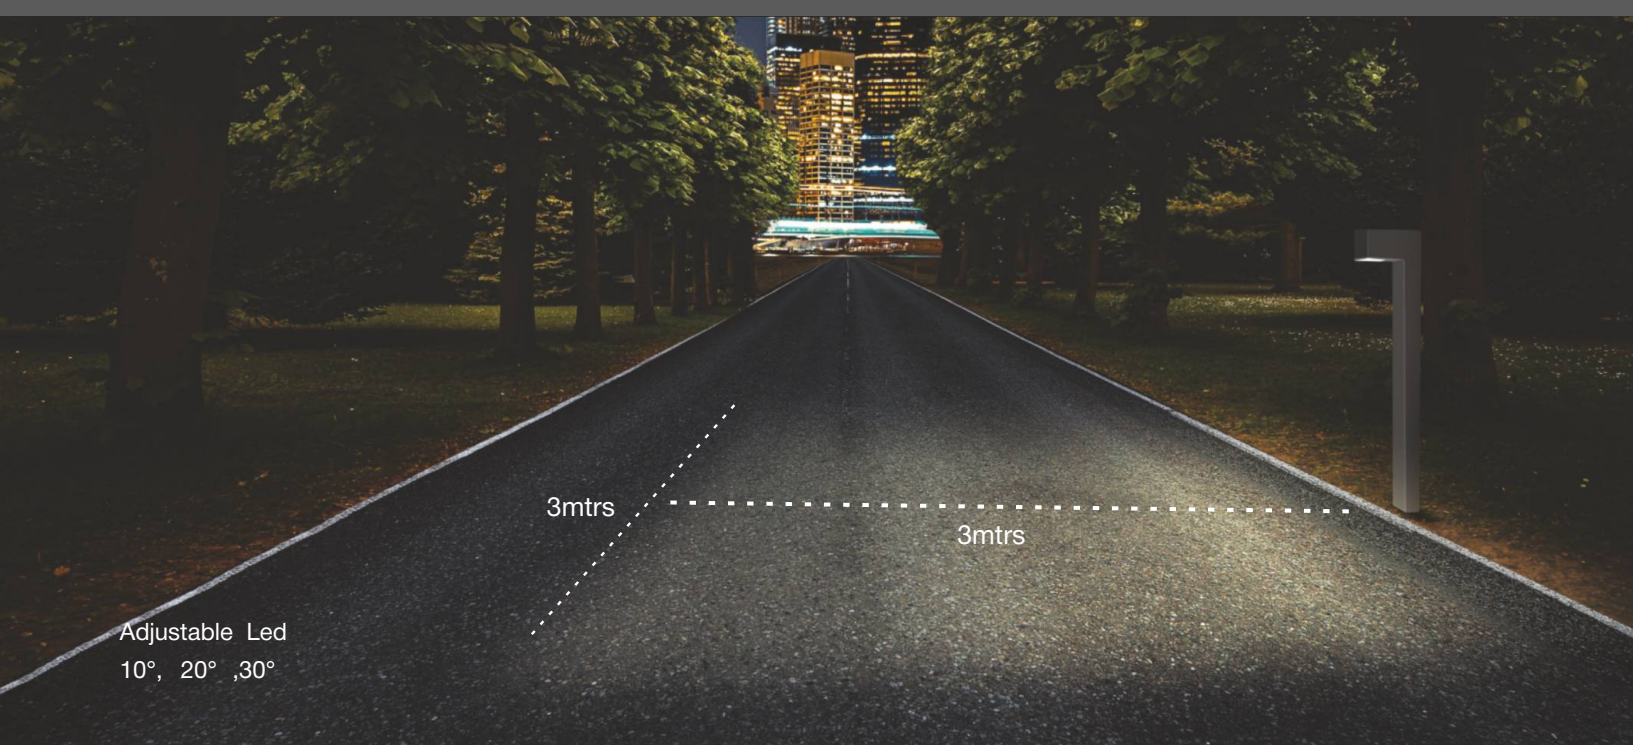

Adjustable Led
10° , 20° ,30°

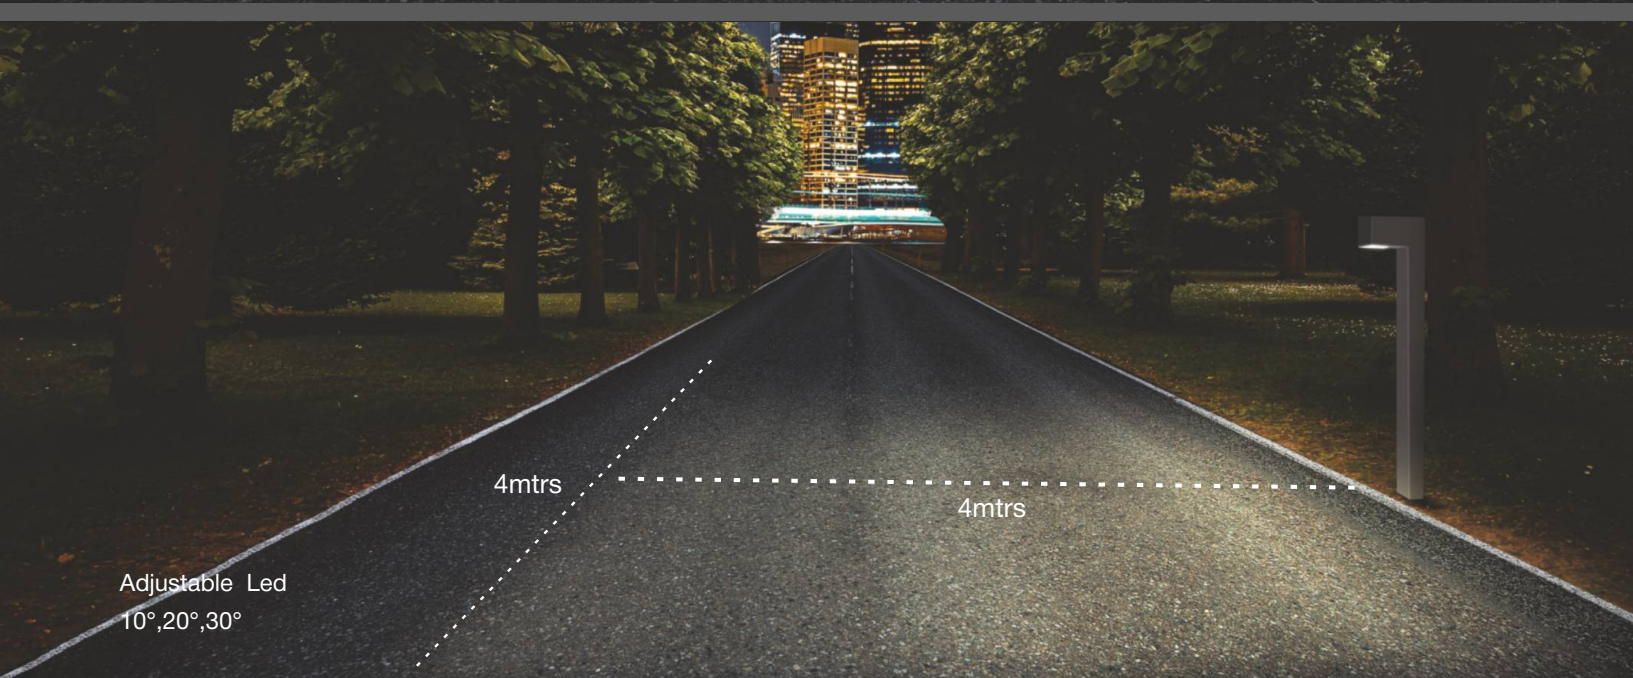


Adjustable Led
10° ,20° ,30°

Longitudinal Asymmetric Optic (AL)



Adjustable Led
10°,20°,30°



2mtr

2mtr

Adjustable Led
10° 20° 30°




2mtr

2mtr

Adjustable Led
10°,20°,30°



Outdoor Architectural Lighting

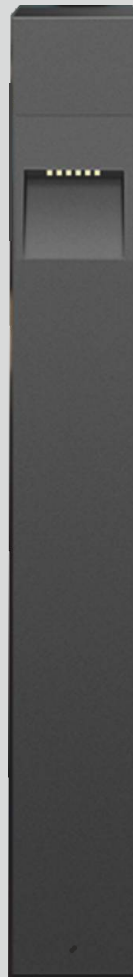

Single/Dual

Bollard Light

It sounds like you're describing a specific type of outdoor lighting product designed for garden and pathway illumination. These luminaries are characterized by Single/Dual-LED Configurations: Providing flexible lighting options depending on the desired brightness or design.

Single/Dual

Bollard Light


The NUVO Bollard LED garden & pathway luminaries are designed to provide effective, glare-free illumination for various outdoor spaces. With a robust construction & specialized features, these luminaries enhance safety & aesthetics in garden, pathway, & public area lighting.

SINGLE/DUAL – BOLLARD Offers a robust and durable structure that can withstand outdoor conditions while being lightweight.

Provides a wide-angle illumination, ensuring broad coverage with high efficiency and brightness.



NL 4409

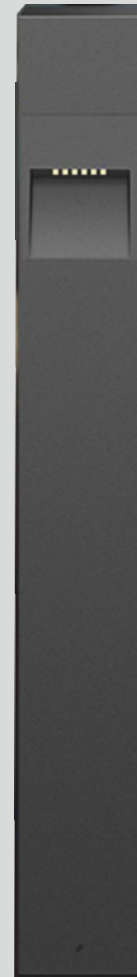

NL 4410


Single/Dual Bollard Lights

Features

- Aluminum Extruded Die Cast Body
- Hi-Power SMD LED
- Non-Corrosive Stainless Steel (SS) Fasteners
- Pre-Wired with Cable Gland
- Silicon Gasket



Applications

- Driveways
- Pathways
- Flowerbeds
- Entrances
- Squares & Gardens

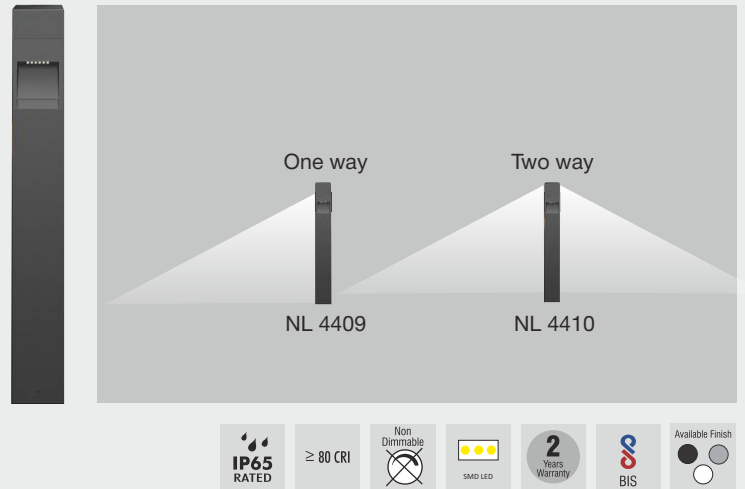

Specification

Model	NL 4409	NL 4410
Power (W)	12W/15W	2x12W/15W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 100V-240V	AC 100V-240V
Optics	LED	LED
Beam Angle	Asymmetrical	Asymmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	40,000 Hrs	40,000 Hrs
Size	D : 100x100mm/H : 750mm	D : 100x100mm/H : 750mm

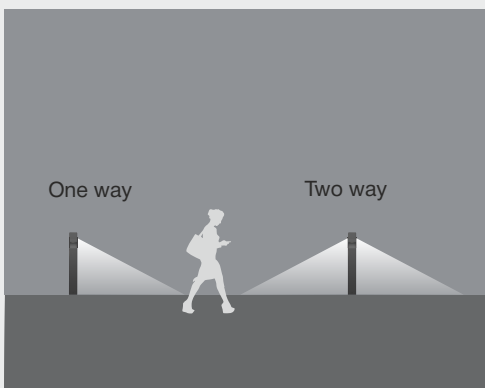



Outdoor Architectural Lighting



Slimo Pole Light

SLIMO Pole Light The pole light is equipped with high-power LEDs from OSRAM (Germany), known for their reliability and efficiency. These LEDs provide an extra-wide beam angle, ensuring broad and uniform illumination.

Slimo

Pole Light

Slimo - Outdoor Pole lighting suitable for any architecture space. It creates visual guidance and exceptional visual comfort. A sleek and minimalist shape provides distinctive lighting effect by night and decorative urban effect during the day.

The SLIMO Pole Lights are ideal for enhancing any architectural space, blending effortlessly with different design styles. Visual Guidance and Comfort: These lights offer clear visual guidance, improving navigation in outdoor spaces while providing exceptional visual comfort, ensuring a pleasant experience for pedestrians and visitors. Sleek and Minimalist: The minimalist shape of SLIMO Pole Lights contributes to a clean, modern aesthetic. Their streamlined design is unobtrusive yet distinctive, making them a stylish addition to urban landscapes. Dual Functionality: By night, SLIMO Pole Lights provide an effective and aesthetically pleasing lighting effect, illuminating spaces with precision. By day, they serve as decorative elements, adding to the visual appeal of the environment



Slimo



Pole Lights

Features

- Aluminium Housing with Integrated MS Hot-Dip Galvanized Pipe.
- Hi-Power OSRAM LED
- Non-Corrosive SS Fasteners
- UV-Stabilized Polycarbonate Diffuser
- Silicon Gasket
- GI Mounting Plate with 360° Alignment
- Pre-Wired and Ready for Operation
- IP65 Rated with Pre-Wired Cable Gland

Applications

- SLIMO Pole Lights
- Driveways
- Pathways
- Building Surrounds
- Entrances
- Squares
- Gardens

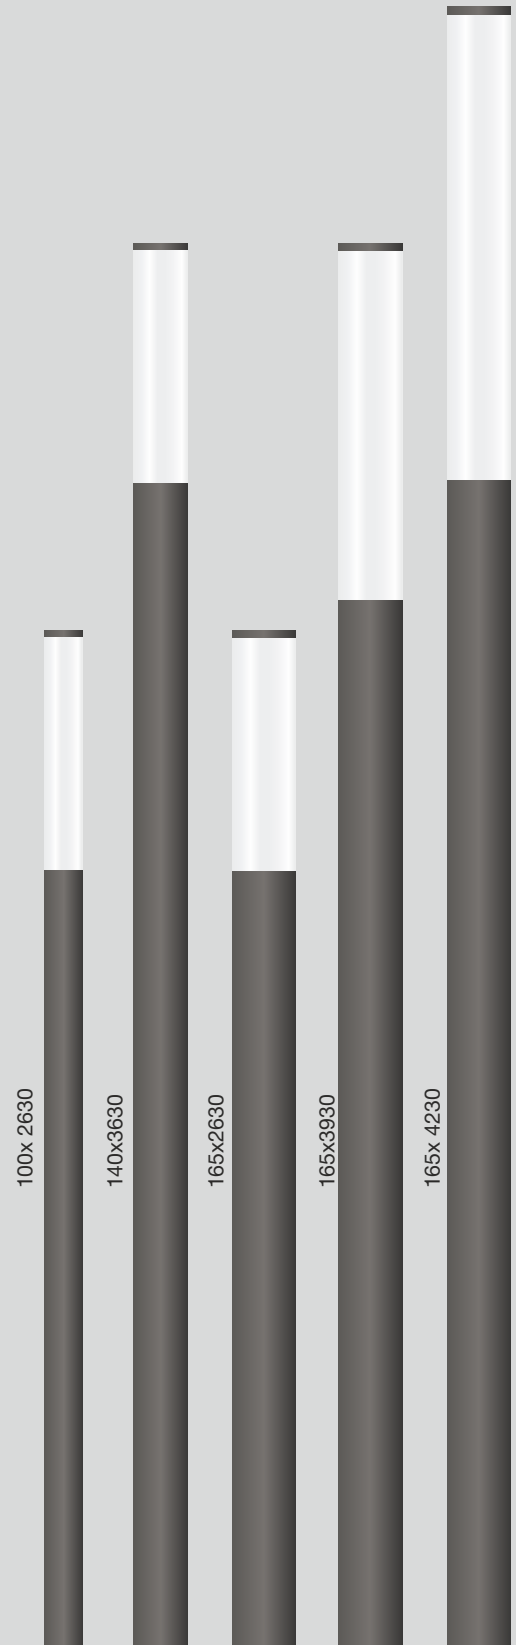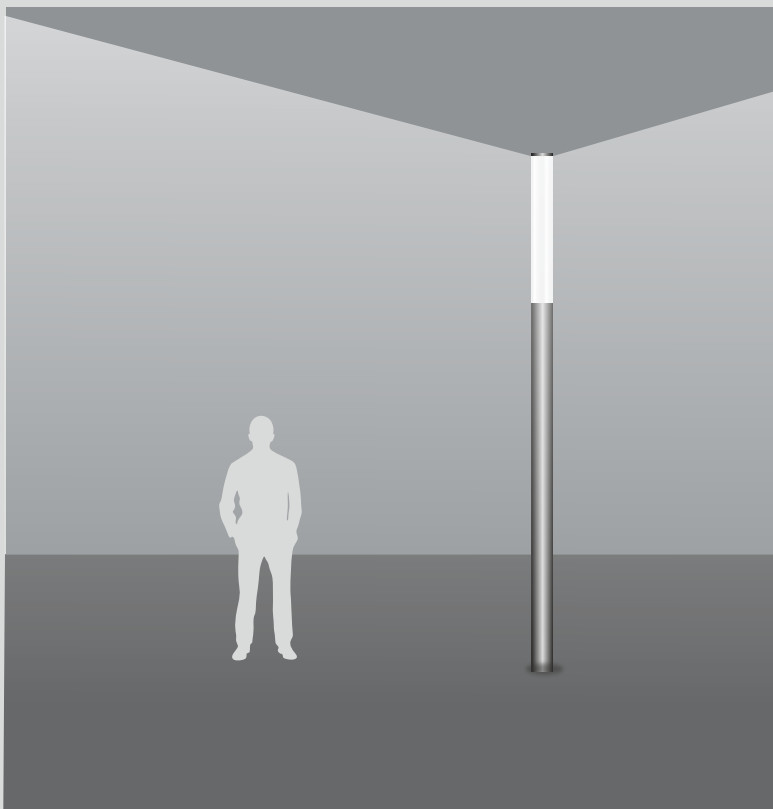

≥ 80 CRI



Slimo

Pole Lights

Features


- Aluminium Housing with Integrated MS Hot-Dip Galvanized Pipe.
- Hi-Power OSRAM LED
- Non-Corrosive SS Fasteners
- UV-Stabilized Polycarbonate Diffuser
- Silicon Gasket
- GI Mounting Plate with 360° Alignment
- Pre-Wired and Ready for Operation
- IP65 Rated with Pre-Wired Cable Gland

Applications

- SLIMO Pole Lights
- Driveways
- Pathways
- Building Surrounds
- Entrances
- Squares
- Gardens

NL 4325-CS H 3630

SLIMO - D100

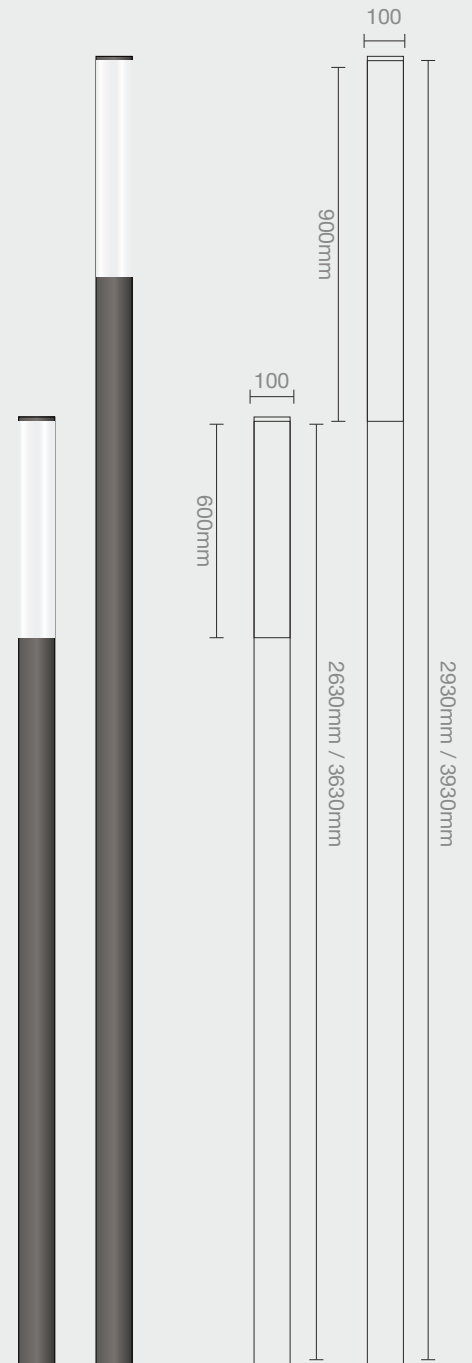

Specification

	NL 4325-CS H 2630	NL 4325-CS H 2930
Model	NL 4325-CS H 2630 NL 4325-CS H 3630	NL 4325-CS H 3930
Power (W)	36W	50W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	Symmetrical	Symmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 100mm H : 2630mm/ 3630mm OP: 600mm	D : 100mm H : 2930mm / 3930mm OP: 900mm

Slimo

Pole Lights

Features


- Aluminium Housing with Integrated MS Hot-Dip Galvanized Pipe.
- Hi-Power OSRAM LED
- Non-Corrosive SS Fasteners
- UV-Stabilized Polycarbonate Diffuser
- Silicon Gasket
- GI Mounting Plate with 360° Alignment
- Pre-Wired and Ready for Operation
- IP65 Rated with Pre-Wired Cable Gland

Applications

- SLIMO Pole Lights
- Driveways
- Pathways
- Building Surrounds
- Entrances
- Squares
- Gardens

Specification

Model	NL 4335-CS H 2630 NL 4335-CS H 3630	NL 4335-CS H 2930 NL 4335-CS H 3930
Power (W)	36W	36W/50W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	Symmetrical	Symmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 140mm H : 2630mm/ 3630mm OP: 600mm	D : 140mm H : 2930mm/ 3930mm OP: 900mm

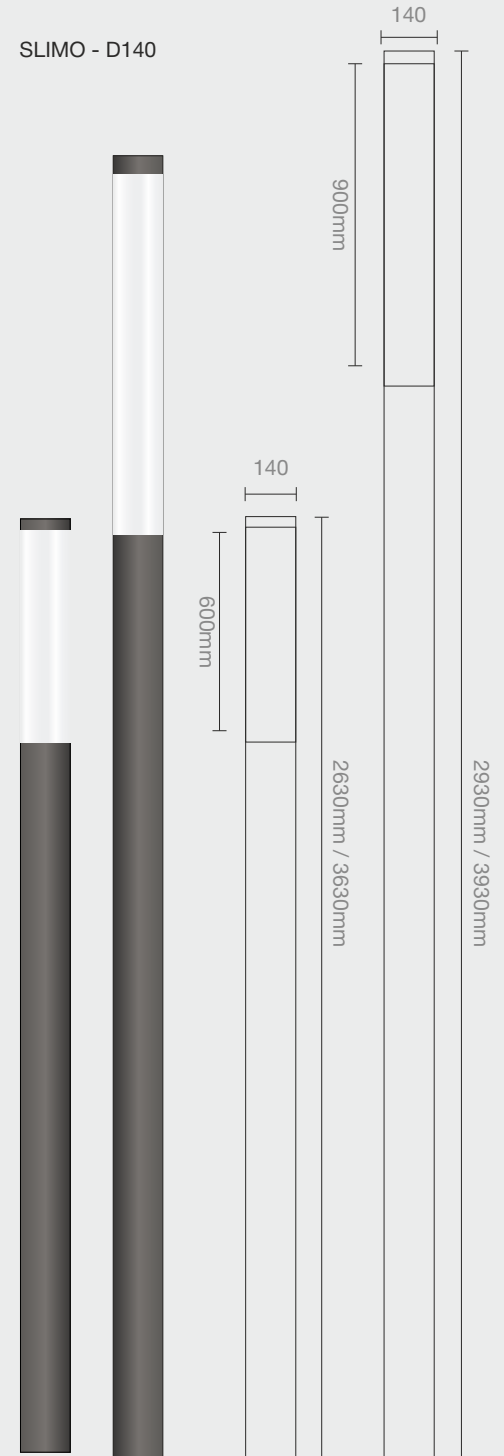

Slimo

Pole Lights

Features

- Aluminium Housing with Integrated MS Hot-Dip Galvanized Pipe.
- Hi-Power OSRAM LED
- Non-Corrosive SS Fasteners
- UV-Stabilized Polycarbonate Diffuser
- Silicon Gasket
- GI Mounting Plate with 360° Alignment
- Pre-Wired and Ready for Operation
- IP65 Rated with Pre-Wired Cable Gland


Applications

- SLIMO Pole Lights
- Driveways
- Pathways
- Building Surrounds
- Entrances
- Squares
- Gardens

Specification

Model	NL 4335-CS H 3230	NL 4335-CS H 4230
Power (W)	60W	60W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	Symmetrical	Symmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 140mm H : 3230mm OP: 1200mm	D : 140mm H : 4230mm OP: 1200mm

SLIMO - D140

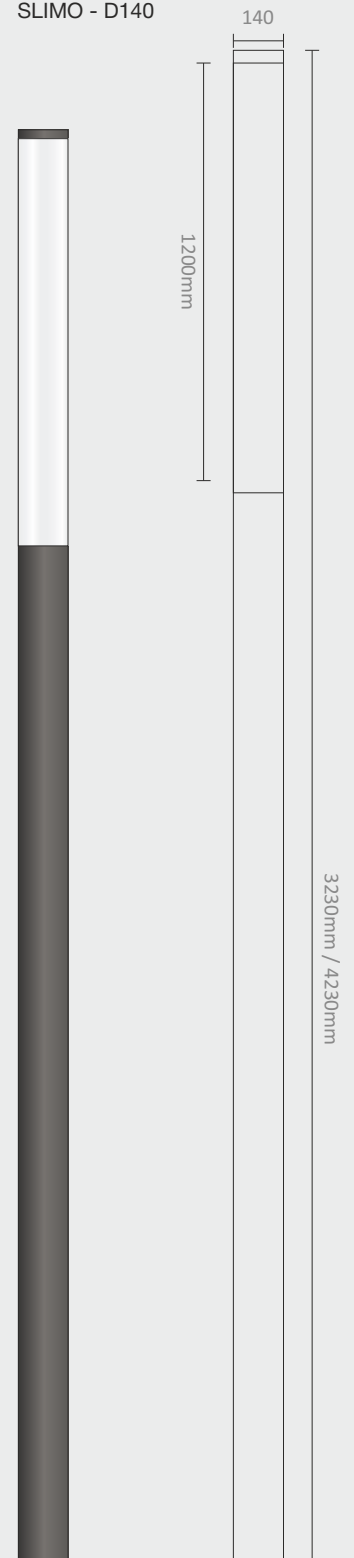

Slimo

Pole Lights


Features

- Aluminium Housing with Integrated MS Hot-Dip Galvanized Pipe.
- Hi-Power OSRAM LED
- Non-Corrosive SS Fasteners
- UV-Stabilized Polycarbonate Diffuser
- Silicon Gasket
- GI Mounting Plate with 360° Alignment
- Pre-Wired and Ready for Operation
- IP65 Rated with Pre-Wired Cable Gland

Applications

- SLIMO Pole Lights
- Driveways
- Pathways
- Building Surrounds
- Entrances
- Squares
- Gardens

SLIMO - D165

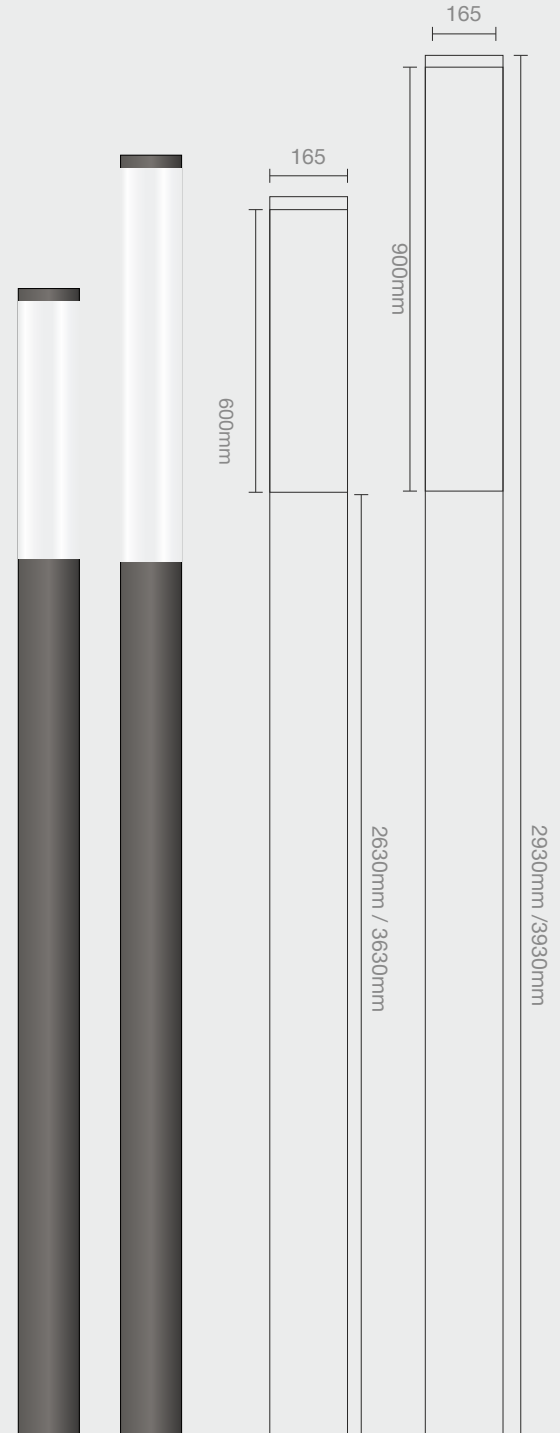

Specification

Model	NL 4345-CS H 2630 NL 4345-CS H 3630	NL 4345-CS H 2930 NL 4345-CS H 3930
Power (W)	50W	70W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	Symmetrical	Symmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 165mm H : 2630mm / 3630mm OP: 600mm	D : 165mm H : 2930mm/ 3930mm OP: 900mm

Slimo


Pole Lights

Features

- Aluminium Housing with Integrated MS Hot-Dip Galvanized Pipe.
- Hi-Power OSRAM LED
- Non-Corrosive SS Fasteners
- UV-Stabilized Polycarbonate Diffuser
- Silicon Gasket
- GI Mounting Plate with 360° Alignment
- Pre-Wired and Ready for Operation
- IP65 Rated with Pre-Wired Cable Gland

Applications

- SLIMO Pole Lights
- Driveways
- Pathways
- Building Surrounds
- Entrances
- Squares
- Gardens

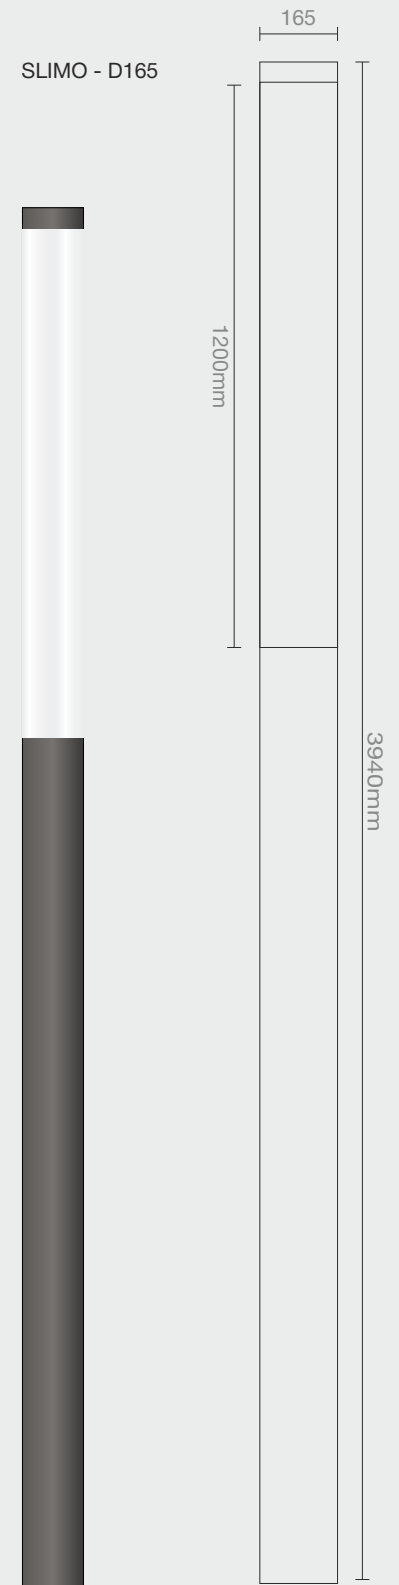

Specification

Model	NL 4345-CS H 3230	NL 4345-CS H 4230
Power (W)	90W	90W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	Symmetrical	Symmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 165mm H : 3230mm OP: 1200mm	D : 165mm H : 4230mm OP: 1200mm




Outdoor Architectural Lighting

Glowspire Stick Lighting System

The GLOWSPIRE STICK - Lighting System is Aluminium & GI Construction: Combines aluminium and galvanized iron (GI) for a robust and corrosion-resistant housing, ensuring long-lasting performance in outdoor environments.

Pre-Wired Cable Gland with IP67 Rating: Supplied pre-wired with a cable gland that meets IP67 standards, providing protection against dust and water ingress, suitable for harsh weather conditions.



Glowspire Stick

Lighting System

Features

- Aluminum extruded Die cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners.
- Product supplied pre-wired cable gland compliance to IP67 rating
- Silicon gasket.

Applications

- Street Lighting
- Roadways
- Expressways
- Malls
- Residential Area Lighting
- Courtyards



NL 4350





NL 4351



Specification

Model	NL 4350	NL 4351
LED	Osram/Bridgelux/Equivalent	Osram/Bridgelux/Equivalent
Power (W)	30W/45W/60W	30W/45W/60W
Color Temperature (CCT)	3000K/4000K/6000K	3000K/4000K/6000K
Color Rendering Index (CRI)	≥80	≥80
Housing	Aluminium & GI Pole	Aluminium & GI Pole
Optics	Clear Diffuser	Clear Diffuser
Beam Angle	Symmetrical	Symmetrical
Finish	Dark Grey	Dark Grey
Input Voltage	220-240V AC	220-240V AC
Power Factor (PF)	>0.9	>0.9
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Head Dimension	Ø171x722MM	Ø171x818MM
Total Height	2M/3M/4M	2M/3M/4M

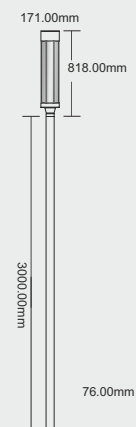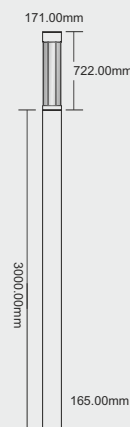




Outdoor Architectural Lighting

Marvello

Modern Street Light

Marvello - the slim square pole Street Light having LED driver as an integral part of the design, totally weather proof aesthetically contoured, one arm or two arm, Easy revamping by bottom opening for maintenance High Brightness, LED Light source do not pose any environment risks. Energy efficient range of luminaries for road and residential streets that combine a clean look with powerful performance & robustness.

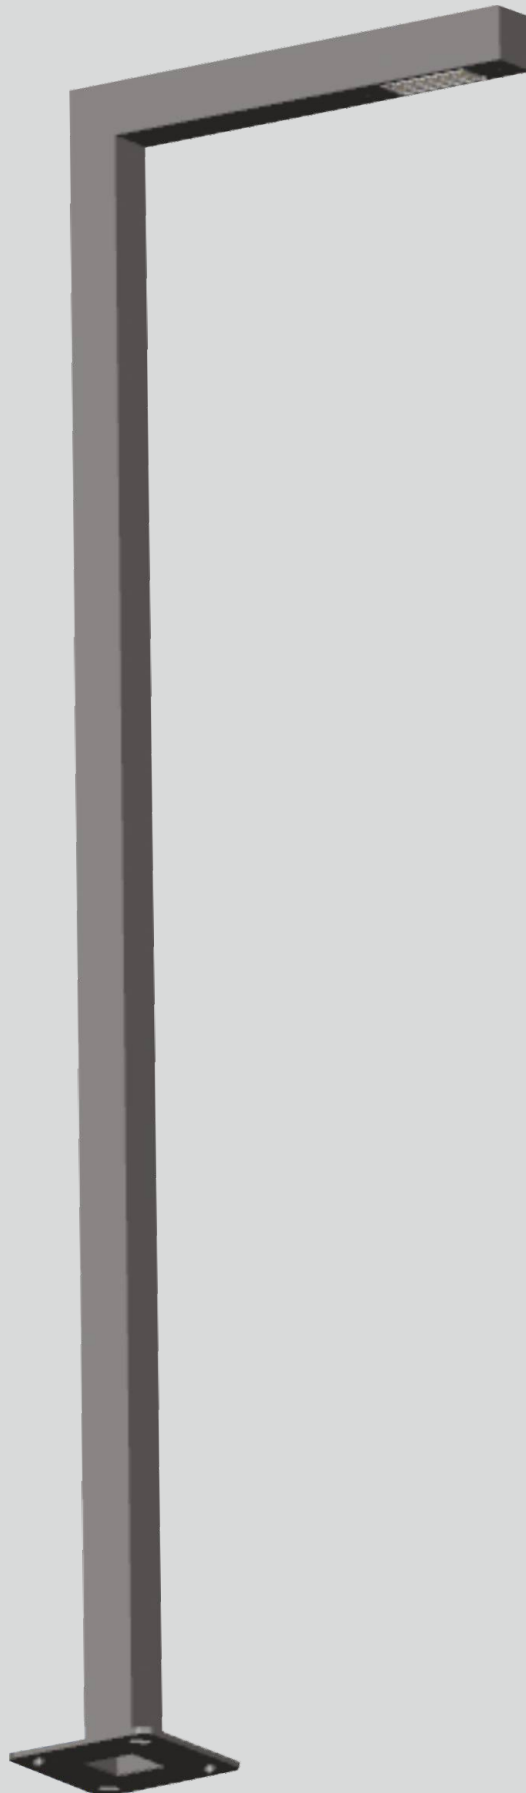


Marvello

Modern Street Light

The MARVELLO street light features a sleek and modern square pole design, making it a visually appealing addition to any street or residential area.

Integrated LED Driver: The LED driver is an integral part of the design, ensuring efficient operation and simplifying the overall system. **Weatherproof Construction:** Designed to withstand various weather conditions, the street light is fully weatherproof, ensuring long-lasting.

Aluminium Extruded Die Cast Body: The street light features a robust aluminum die-cast body that is both durable and lightweight, designed to withstand outdoor conditions. **Hi-Power SMD LED:** Equipped with high-power Surface-Mount Device (SMD) LEDs, providing an extra-wide beam angle for broad and uniform illumination. **Non-Corrosive SS Fasteners:** Stainless steel fasteners are used to prevent rust and corrosion, ensuring long-term reliability in various weather conditions. **Pre - Wired Cable Gland with IP67 Rating:** The product comes pre-wired with a cable gland that meets IP67 standards, providing protection against dust and water ingress, suitable for harsh outdoor environments. **Silicon Gasket:** A silicon gasket is included to enhance sealing and ensure the street light's weatherproof capabilities.

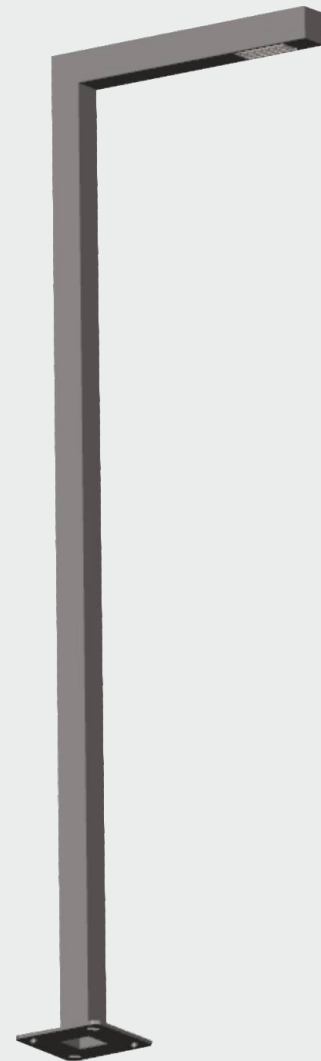

NL 4412

Marvello



Modern Street Light

Features

- Aluminium extruded Die cast body
- Hi-Power SMD LED
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.
- Wall Thickness: Available in 2mm and 3mm



Applications

- Modern Street Light
- Smaller Roadways
- Private Driveways
- Residential Area Lighting
- Courtyards

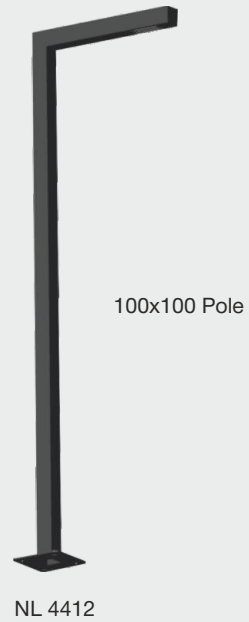

Specification

Model	NL 4411	NL 4412	NL 4413
Power (W)	30W/48W/60W	30W/48W/60W	30W/48W/60W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED
Beam Angle	Type II	Type II	Type II
Housing	GI	GI	GI
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	AL : 750mm/H : 3/4/5/6Mtrs	AL : 750mm/H : 3/4/5/6Mtrs	AL : 750mm/H : 3/4/5/6Mtrs

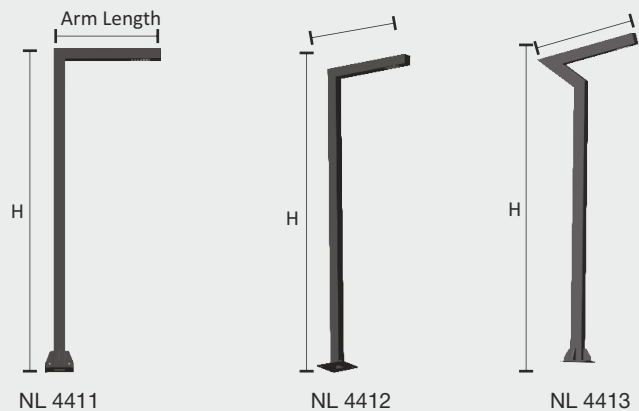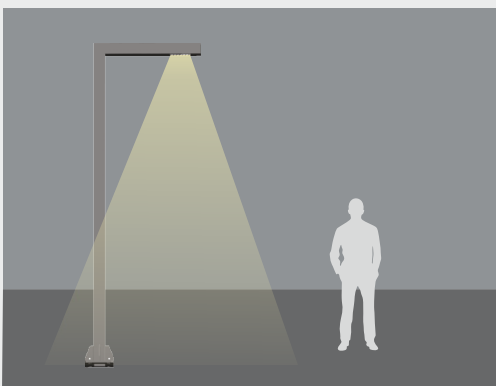

Marvello


Modern Street Light

Features


- Aluminium extruded Die cast body
- Hi-Power SMD LED
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.
- Wall Thickness: Available in 2mm and 3mm

Applications

- Modern Street Light
- Smaller Roadways
- Private Driveways
- Residential Area Lighting
- Courtyards


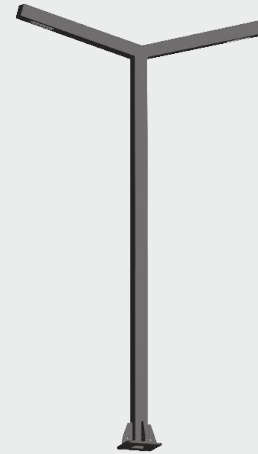


NL 4415



Specification

Model	NL 4414	NL 4415	NL 4416
Power (W)	2x30W/2x48W/2x60W	2x30W/2x48W/2x60W	2x30W/2x48W/2x60W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED
Beam Angle	Type II	Type II	Type II
Housing	GI	GI	GI
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	AL : 1500mm/H : 3/4/5/6Mtrs	AL : 1500mm/H : 3/4/5/6Mtrs	AL : 1500mm/H : 3/4/5/6Mtrs

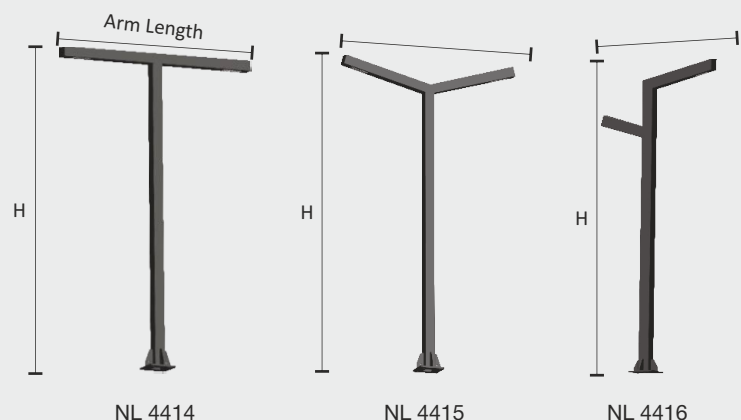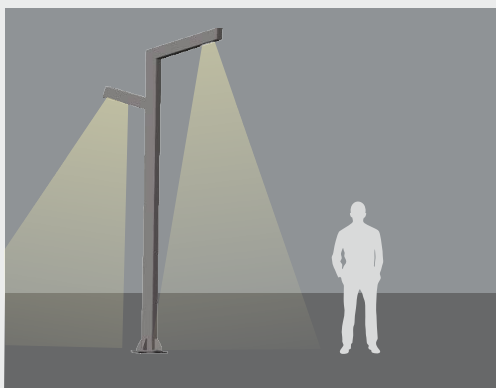

Marvello


Modern Street Light

Features


- Aluminium extruded Die cast body
- Hi-Power SMD LED
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.
- Wall Thickness: Available in 2mm and 3mm

Applications

- Modern Street Light
- Smaller Roadways
- Private Driveways
- Residential Area Lighting
- Courtyards


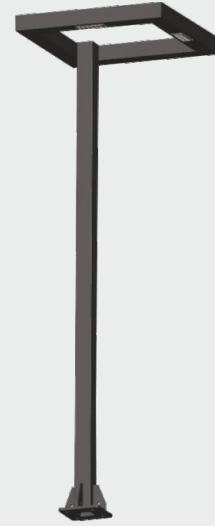


NL 4419



Specification

Model	NL 4417	NL 4418	NL 4419
Power (W)	2x30W/2x48W/2x60W	2x30W/2x48W/2x60W	2x30W/2x48W/2x60W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED
Beam Angle	Type II	Type II	Type II
Housing	GI	GI	GI
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	AL : 1500mm/H : 3/4/5/6Mtrs	AL : 750mm/H : 3/4/5/6Mtrs	AL : 750mm/H : 3/4/5/6Mtrs

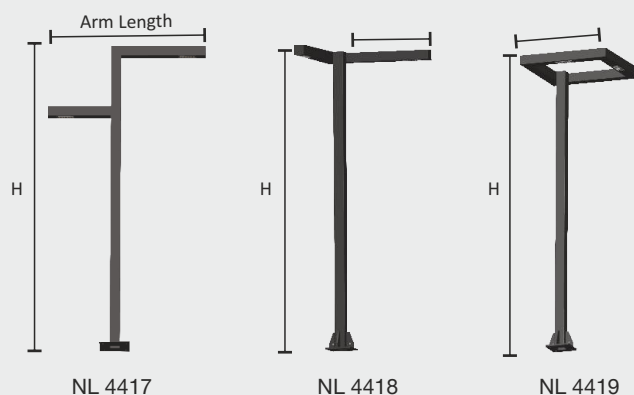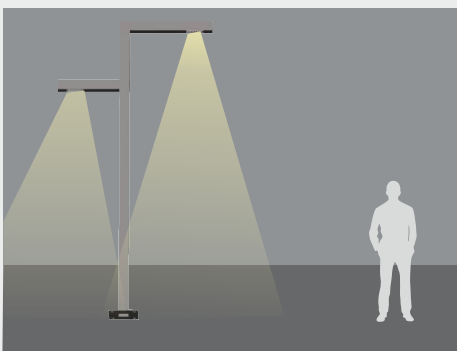

Marvello

Modern Street Light

Features


- Aluminium extruded Die cast body
- Hi-Power SMD LED
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.
- Wall Thickness: 3mm

Applications

- Modern Street Light
- Smaller Roadways
- Private Driveways
- Residential Area Lighting
- Courtyards
- Public area lighting like parks & Squares.





NL 4420



Specification

Model	NL 4420	NL 4440
Power (W)	3x30W/3x48W/3x60W	4x30W/4x48W/4x60W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	Type II	Type II
Housing	GI	GI
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	AL : 750mm/H : 3/4/5/6Mtrs	AL : 750mm/H : 3/4/5/6Mtrs

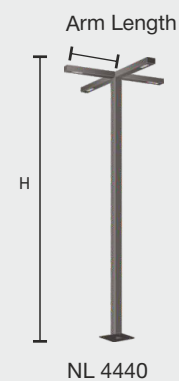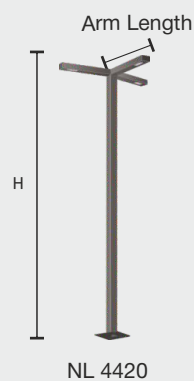

Marvello



Modern Street Light

Features

- Aluminium extruded Die cast body
- Hi-Power SMD LED
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.
- Wall Thickness: Available in 2mm and 3mm



Applications

- Modern Street Light
- Smaller Roadways
- Private Driveways
- Residential Area Lighting
- Courtyards

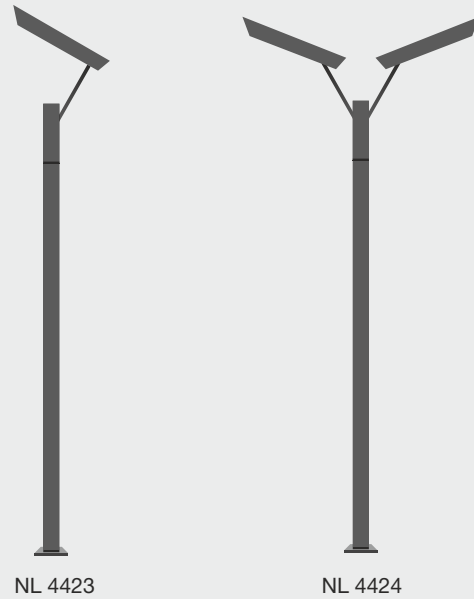


Specification

Model	NL 4423	NL 4424
Power (W)	30W/48W/60W	2x30W/2x48W/2x60W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	Type II	Type II
Housing	GI	GI
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	AL : 750mm/H : 3/4/5/6Mtrs	AL : 1658mm/H : 3/4/5/6Mtrs

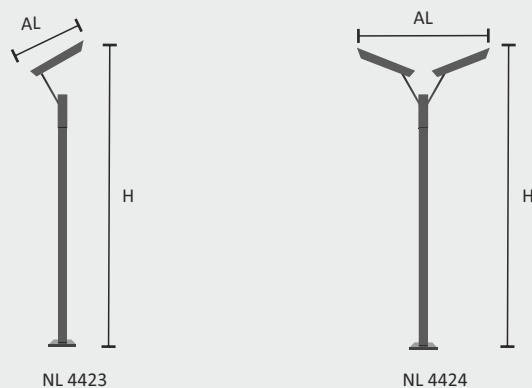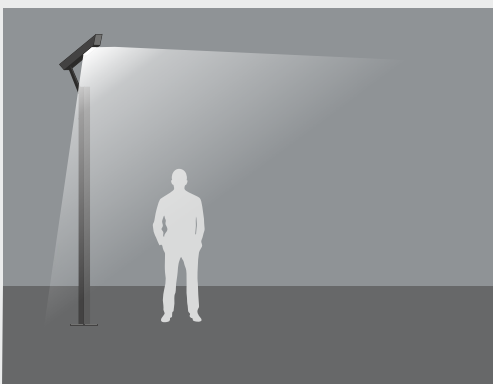



Outdoor Architectural Lighting

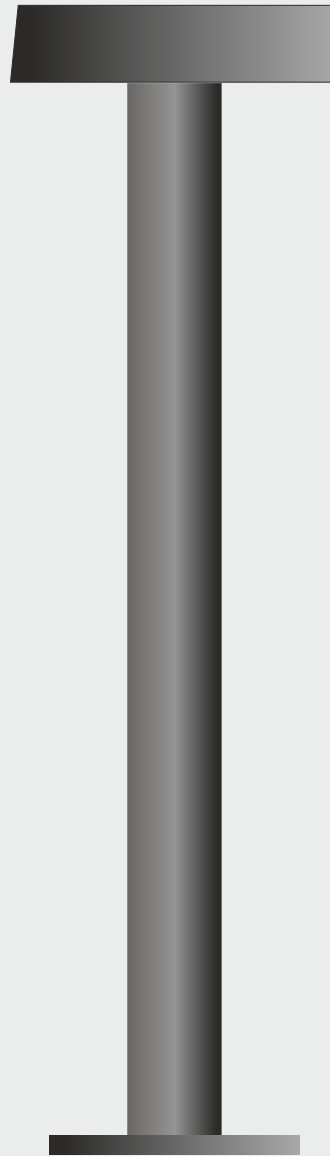

Atria

Bollard & Pollard Light

Aluminium Housing High Corrosion Resistance The bollard is constructed from high-quality aluminium, which provides excellent resistance to corrosion. This makes it suitable for use in diverse environmental conditions, ensuring longevity & durability.

Atria

Bollard & Pollard Light

Atria - Decorative light column designed to provide soft, uniform light. An elegant and efficient column with translucent diffuser enclosure to prevent glare and provide a unique, comfortable light choice. A sleek minimalist shape provides distinctive lighting effects by night and decorative urban effect during the day.

Equipped with high-power LEDs from OSRAM, known for their reliability and efficiency. These LEDs provide an extra-wide beam angle for broad and uniform.

Aluminium Housing with MS Hot-Dip Galvanized Pipe: The housing is made from aluminum, and the integrated mild steel (MS) pipe is hot-dip galvanized for enhanced corrosion resistance. The entire assembly is treated with UV-stabilized polyurethane liquid paint, making it suitable for outdoor use.



Atria



Bollard Light

Features

- Aluminium Housing with MS Hot-Dip Galvanized Pipe
- Hi-Power OSRAM (Germany) LED
- Non-Corrosive SS Fasteners
- Translucent Glass
- Silicon Gasket
- GI Mounting Plate
- Pre-Wired with Accessories
- IP65 Rated Cable Gland



Applications

- Street Lighting
- Smaller Roadways
- Expressways
- Private driveways
- Residential Area Lighting
- Courtyards
- Public area lighting like parks & Squares.

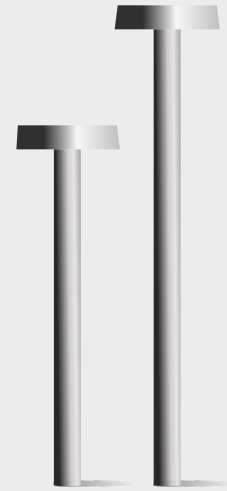

Specification

Model	NL 4382
Power (W)	20W
Color Temperature (CCT)	3K/4K/6K
Input Voltage	AC 220V-240V
Optics	LED
Beam Angle	Symmetrical
Housing	Aluminum Die Cast
Finish	Dark Grey
Color Rendering Index (CRI)	>80
Protection Rating (IP)	IP65
Dimming	Non-Dimmable
Life Span (hours)	50,000 Hrs
Size	D :165mm/H :600/800mm

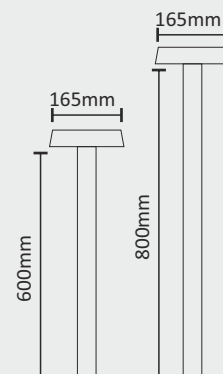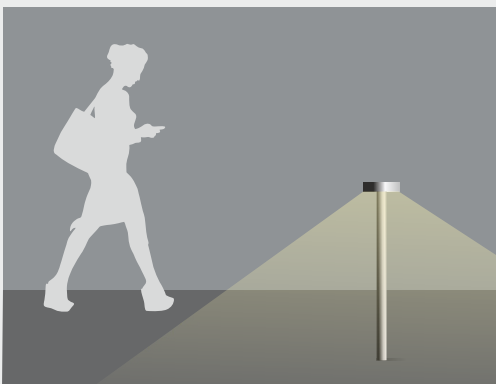

Atria


Pole Light

Features

- Aluminium Housing with MS Hot-Dip Galvanized Pipe
- Hi-Power OSRAM (Germany) LED
- Non-Corrosive SS Fasteners
- Translucent Glass
- Silicon Gasket
- GI Mounting Plate
- Pre-Wired with Accessories
- IP65 Rated Cable Gland



Applications

- Street Lighting
- Smaller Roadways
- Expressways
- Private driveways
- Residential Area Lighting
- Courtyards
- Public area lighting like parks & Squares.



Specification


Model	NL 4386
Power (W)	30W/45W/60W
Color Temperature (CCT)	3K/4K/6K
Input Voltage	AC 220V-240V
Optics	LED
Beam Angle	Symmetrical
Housing	Aluminum Die Cast
Finish	Dark Grey
Color Rendering Index (CRI)	>80
Protection Rating (IP)	IP65
Dimming	Non-Dimmable
Life Span (hours)	50,000 Hrs
Size	D :300mm H :3M/4M/5M/6M

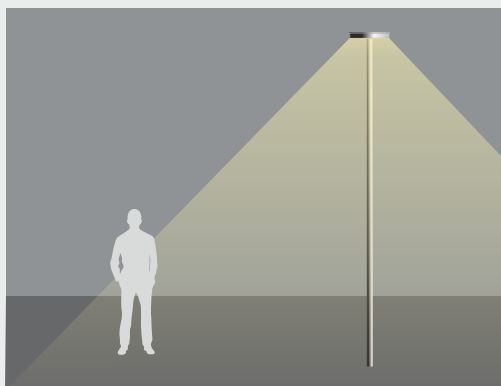





Outdoor Architectural Lighting

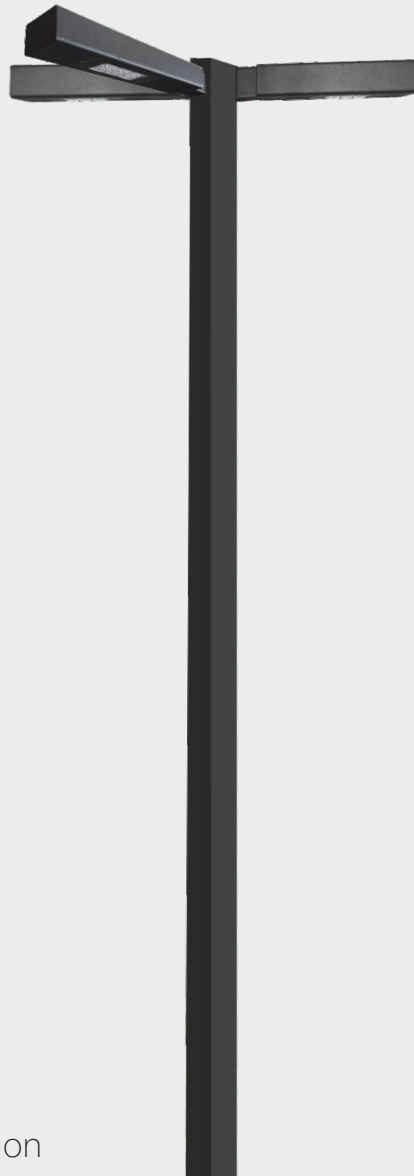

Squaro Pole Light

Aluminium Housing High Corrosion Resistance The bollard is constructed from high-quality aluminium, which provides excellent resistance to corrosion. This makes it suitable for use in diverse environmental conditions, ensuring longevity & durability.

Outdoor Architectural Lighting



Squaro

Pole Light

The SQUARO - Pole Lights are designed for a range of outdoor applications, offering both functionality & durability. These pole lights are equipped with LED technology, providing efficient and bright illumination suitable for streets & pathways.

Squaro

Pole Light

Features

- GI made Housing.
- Hi-power SMD LED
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.

Applications


- Street Lighting
- Roadways
- Expressways
- Private driveways
- Residential Area Lighting
- Courtyards
- Public area lighting like parks & Squares.



4221 - A (Square Pole)





4221 - B (Round Pole)



Specification

MODEL	NL 4421 - A	NL 4421 - B
LED	OSRAM	OSRAM
POWER	30W/45W/60W	30W/45W/60W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80
BEAM ANGLE	T1/T2/T3/T4	T1/T2/T3/T4
LUMINAIRE BODY	GI	GI
OPTICS	PMMA CLEAR OPTIC LENSES	PMMA CLEAR OPTIC LENSES
HOUSING COLOR	BLACK/DARK GREY	BLACK/DARK GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP	IP65	IP65
CONTROL & DIMMING	ON-OFF	ON-OFF
HEAD DIMENSION	800X145	800X145
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C

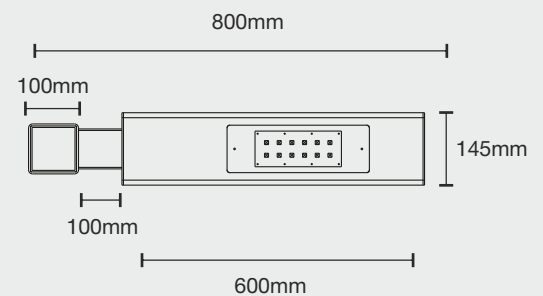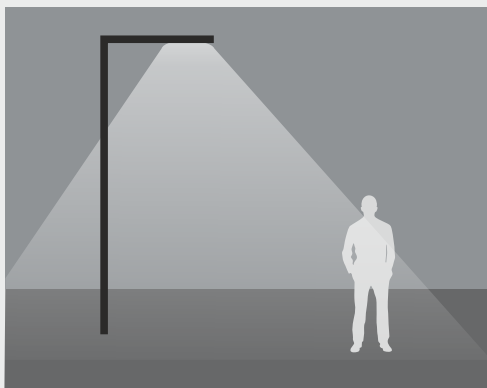

Squaro

Pole Light

Features

- GI made Housing.
- Hi-power SMD LED
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.

Applications

- Street Lighting
- Roadways
- Expressways
- Private driveways
- Residential Area Lighting
- Courtyards
- Public area lighting like parks & Squares.



4222 - A (Square Pole)





4222 - B (Round Pole)



Specification

MODEL	NL 4422 - A	NL 4422 - B
LED	OSRAM	OSRAM
POWER	2x30W/2x45W/2x60W	2x30W/2x45W/2x60W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80
BEAM ANGLE	T1/T2/T3/T4	T1/T2/T3/T4
LUMINAIRE BODY	GI	GI
OPTICS	PMMA CLEAR OPTIC LENSES	PMMA CLEAR OPTIC LENSES
HOUSING COLOR	BLACK/DARK GREY	BLACK/DARK GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP	IP65	IP65
CONTROL & DIMMING	ON-OFF	ON-OFF
HEAD DIMENSION	1000X145	1000X145
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C

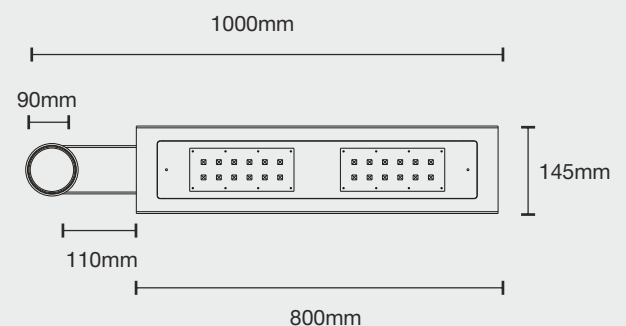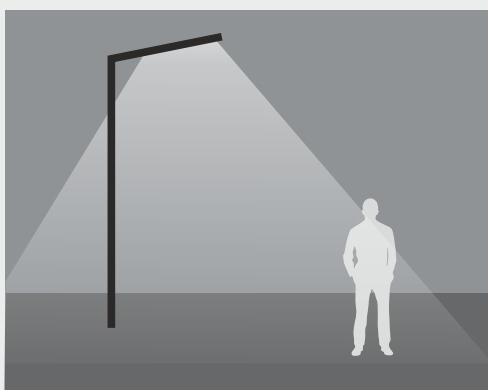

NIRVANALIGHT[®]
Enlighten Your Life



Outdoor Architectural Lighting




Galaxy Post Top Pole Light

GALAXY - Post Top Poles are designed to provide effective and aesthetically pleasing outdoor lighting.

The luminaire features an aluminum housing that is highly resistant to corrosion, ensuring durability and long-lasting performance in outdoor environments.

Outdoor Architectural Lighting

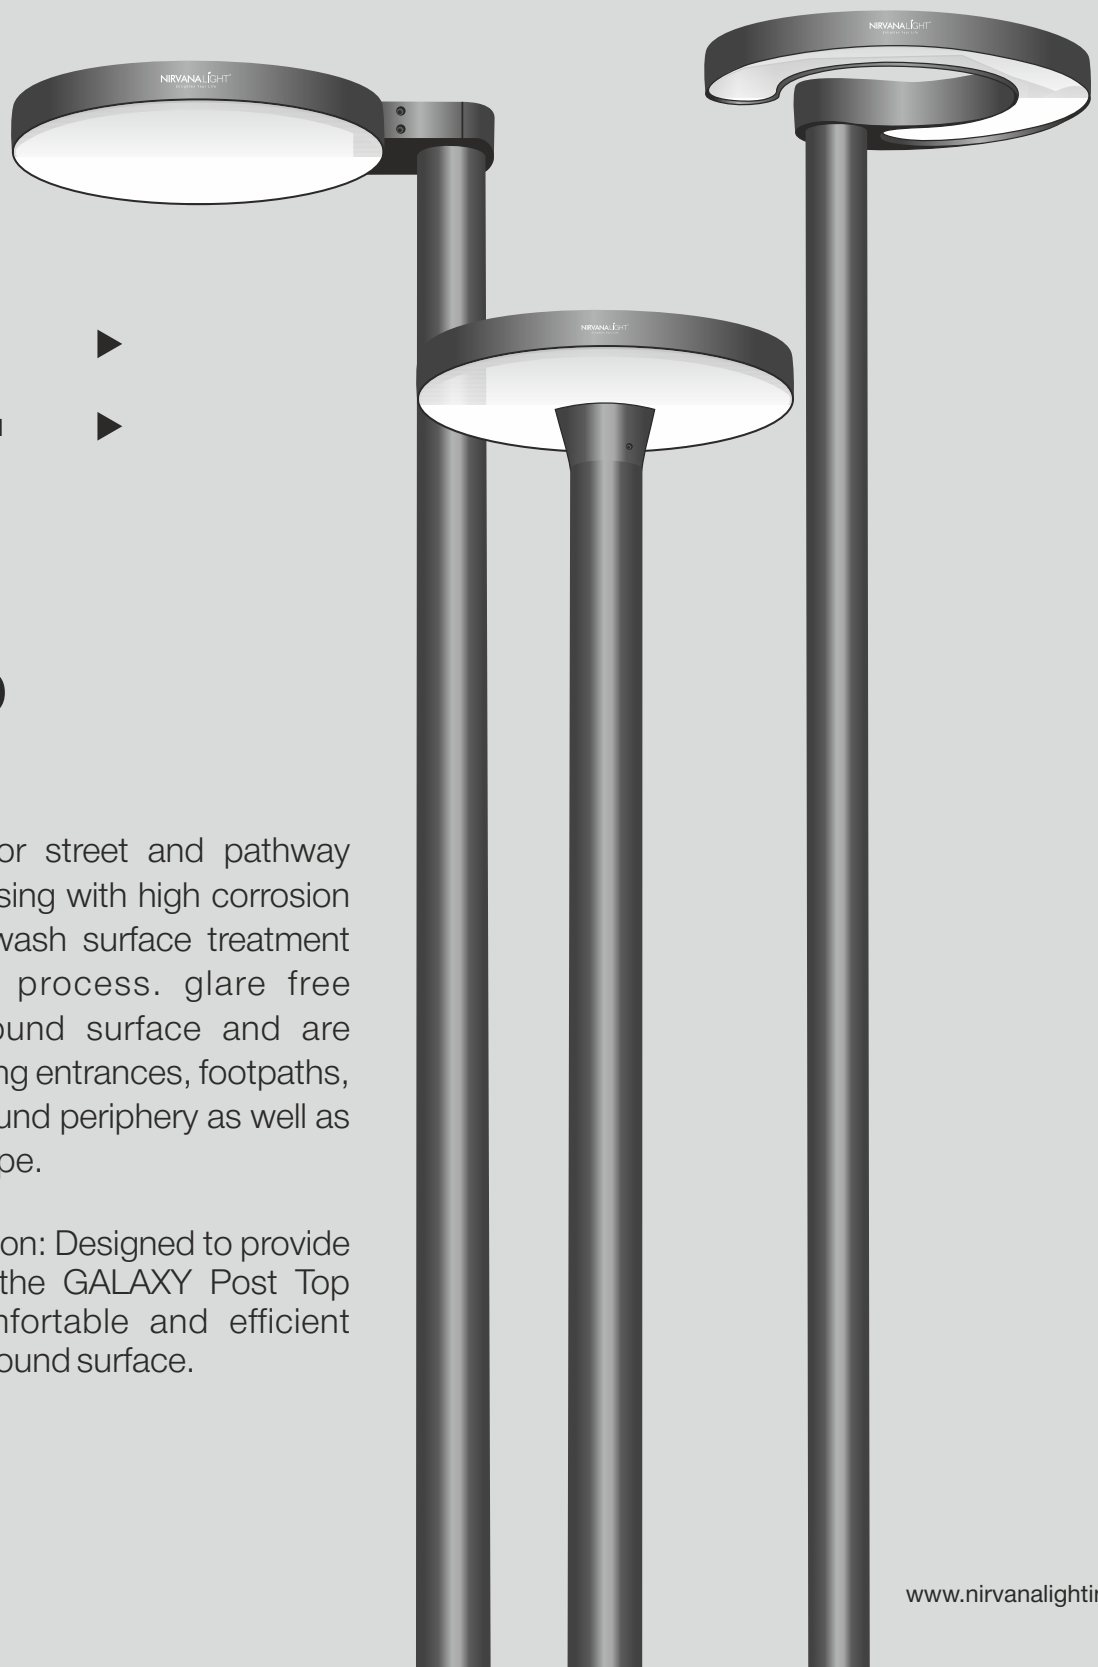

Pole Size

Pole Height: 3-6 Metres

Pole Dia B. : 76MM/114MM

Galaxy Post Top

Pole Light

Galaxy-Pole light for street and pathway luminaires, MS housing with high corrosion resistance. Stone wash surface treatment prior to painting process. glare free illumination of ground surface and are perfect for illuminating entrances, footpaths, public area, compound periphery as well as garden and landscape.

Glare-Free Illumination: Designed to provide glare-free lighting, the GALAXY Post Top Poles ensure comfortable and efficient illumination of the ground surface.

Galaxy Post Top Pole Light

Features

- GI & Aluminum housing.
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.

Applications

- Street Lighting
- Roadways
- Expressways
- Private driveways
- Residential Area Lighting
- Courtyards
- Public area lighting like parks & Squares.



NEPTUNE
NL 4390



ORBIT
NL 4391




MOON
NL 4392



Specification

MODEL	NL 4390	NL 4391	NL 4392
LED	Osram	Osram	Osram
POWER	30W/45W/60W	30W/45W/60W	30W/45W/60W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80	≥80
BEAM ANGLE	Wide->120°	Wide->120°	Wide->120°
LUMINAIRE BODY	ALUMINUM BODY	ALUMINUM BODY	ALUMINUM BODY
OPTICS	MILKY DIFFUSER GLASS/PRISMATIC	MILKY DIFFUSER GLASS/PRISMATIC	MILKY DIFFUSER GLASS/PRISMATIC
HOUSING COLOR	BLACK / DARK GREY	BLACK / DARK GREY	BLACK / DARK GREY
INPUT	220-240V AC	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9	>0.9
IP	IP65	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off	On-Off
HEAD DIMENSION	350x42MM	350x42MM	350x42MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C	-20°C ~ 50°C

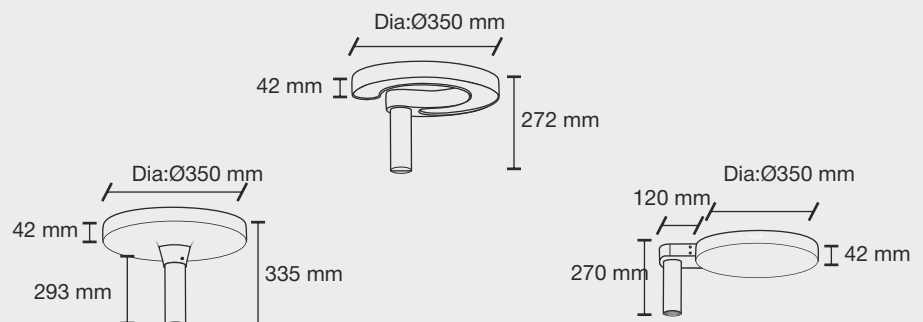

Outdoor Architectural Lighting

Pole Size

Pole Height: 3-6 Meters ▶


Pole Dia B. : 76MM/114MM ▶

Galaxy Post Top

Pole Light

Galaxy-Pole light for street and pathway luminaries, MS housing with high corrosion resistance. Stone wash surface treatment prior to painting process. glare free illumination of ground surface and are perfect for illuminating entrances, footpaths, public area, compound periphery as well as garden and landscape.

Glare-Free Illumination: Designed to provide glare-free lighting, the GALAXY Post Top Poles ensure comfortable and efficient illumination of the ground surface.

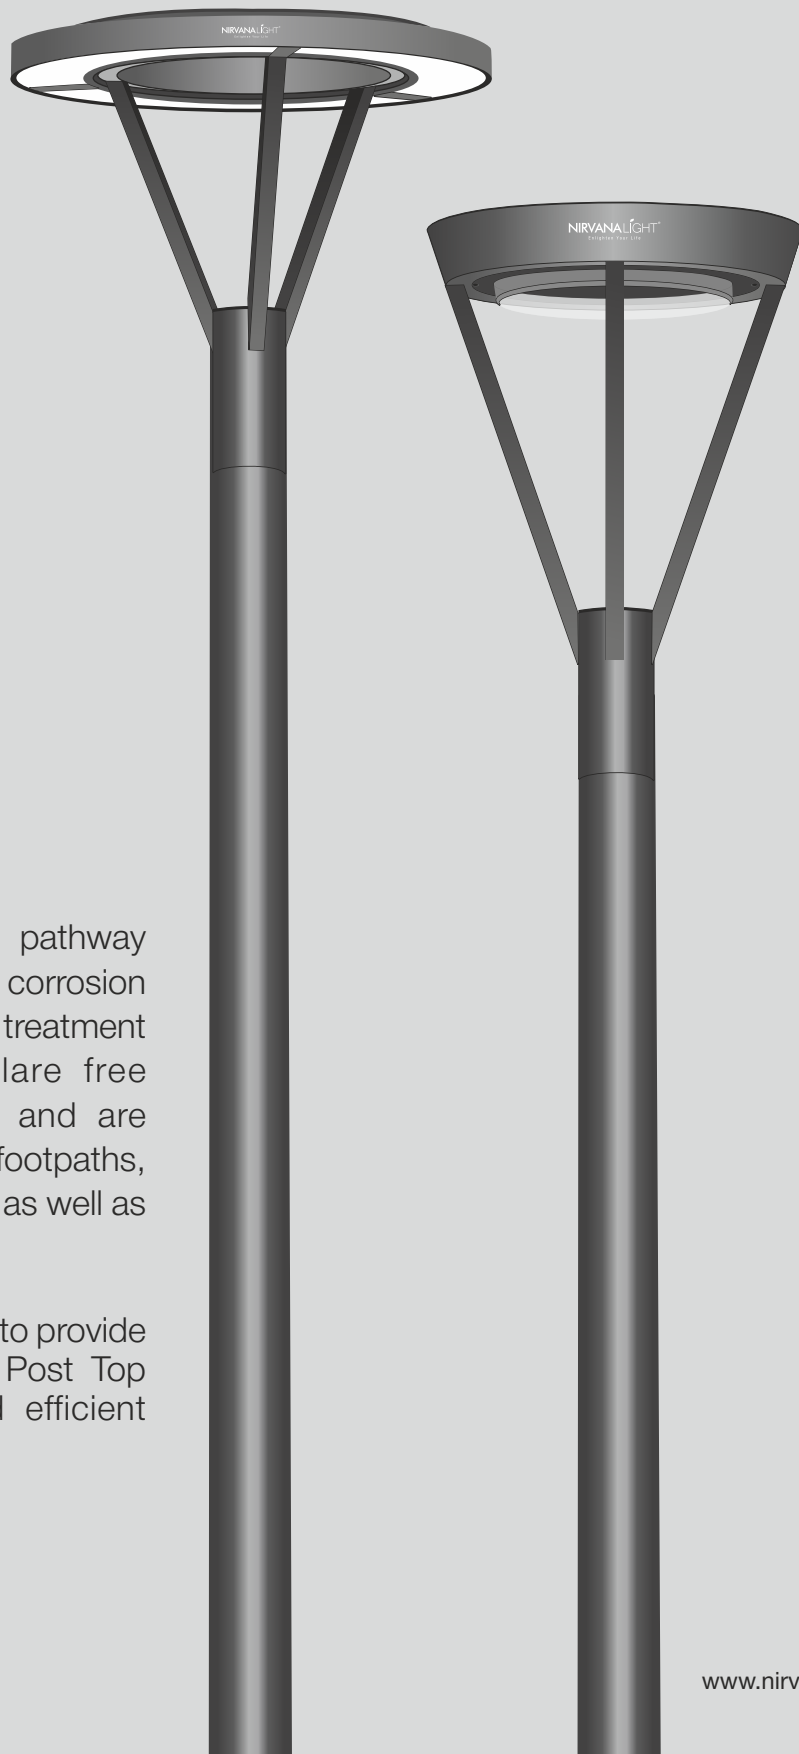

Galaxy Post Top Pole Light

Features

- GI & Aluminum housing.
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.

Applications

- Street Lighting
- Roadways
- Expressways
- Private driveways
- Residential Area Lighting
- Courtyards
- Public area lighting like parks & Squares.



SATURN
NL 4393






MERCURY
NL 4394



Specification

MODEL	NL 4393	NL 4394
LED	Osram/Bridgelux/Equivalent	Osram/Bridgelux/Equivalent
POWER	40W/60W/90W	30W/45W/60W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80
BEAM ANGLE	Wide->120°	Wide->120°
LUMINAIRE BODY	Aluminum & GI Pole	Aluminum & GI Pole
OPTICS	MILKY DIFFUSER GLASS	MILKY DIFFUSER GLASS
HOUSING COLOR	BLACK / DARK GREY	BLACK / DARK GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off
HEAD DIMENSION	600x553MM	450x670MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C

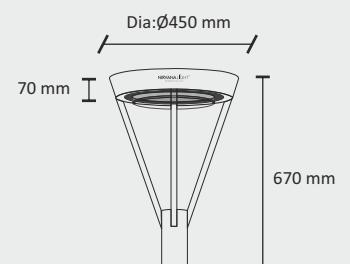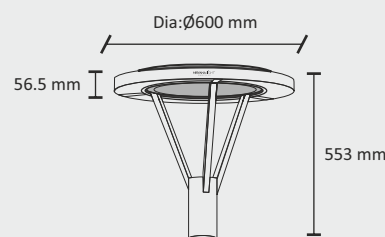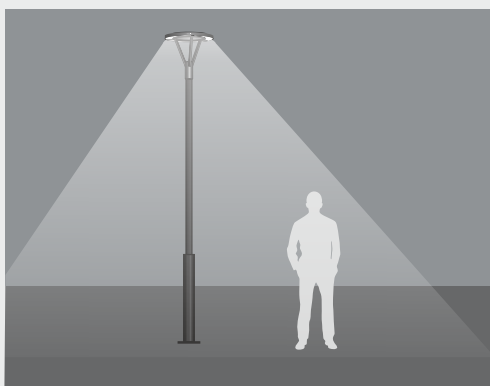



NIRVANALIGHT[®]
Enlighten Your Life




NIRVANALIGHT

Outdoor Architectural Lighting

Modern Street Light

The housing is made from galvanized iron (GI), offering robust construction and high resistance to corrosion for durability in outdoor environments. The housing is made from galvanized iron (GI), offering robust construction and high resistance to corrosion for durability in outdoor environments.

The product is supplied pre-wired with a cable gland that meets IP67 standards, providing protection against dust and water ingress, making it suitable for harsh weather conditions. Includes a silicon gasket to enhance the weatherproof sealing of the luminaires, contributing to its IP67 rating and ensuring reliable performance in various environmental conditions.

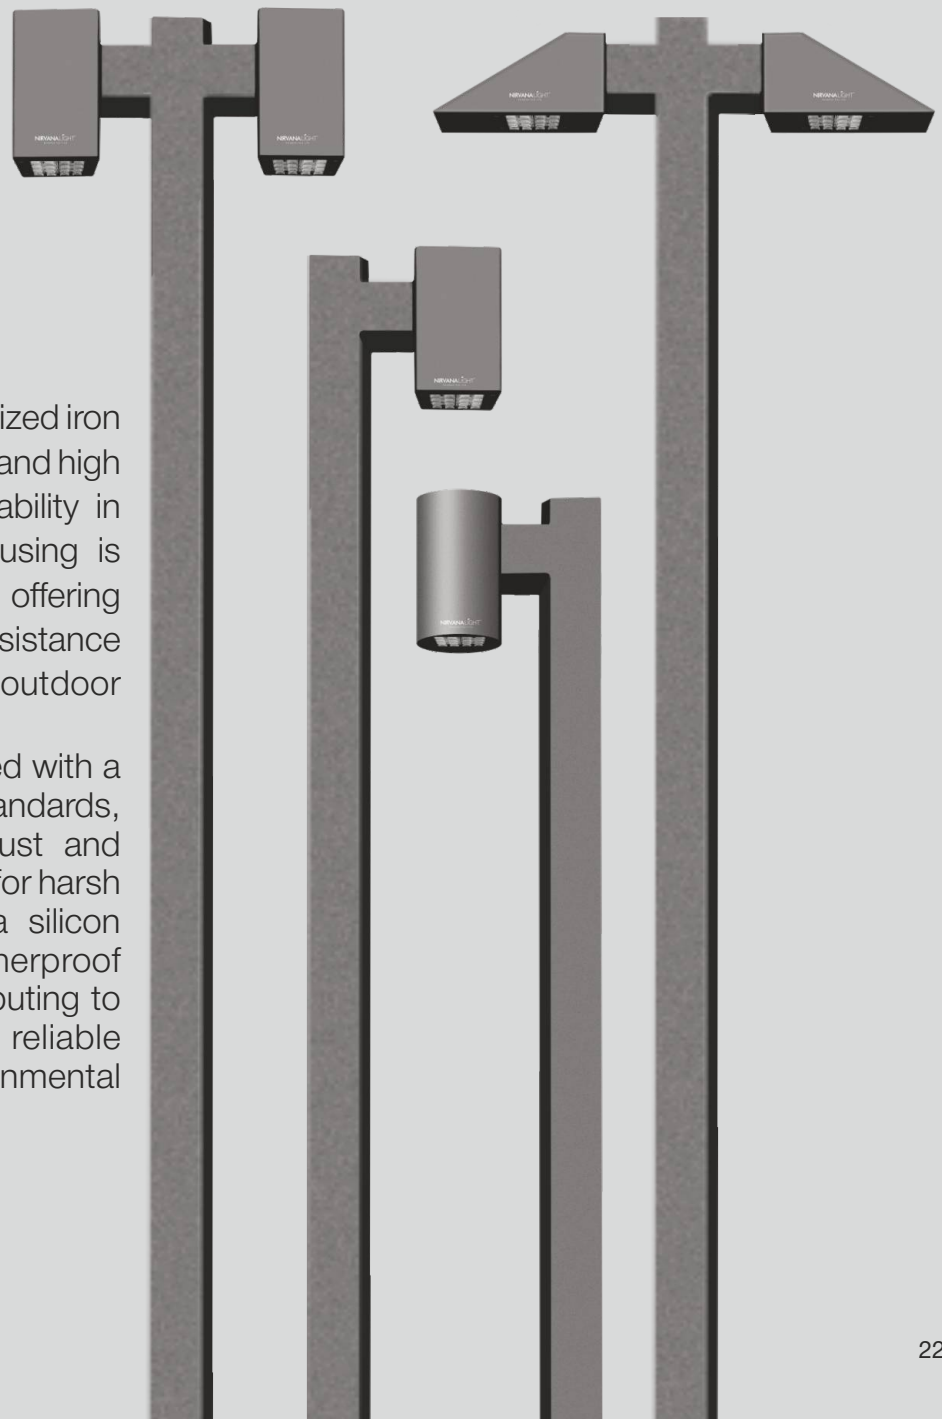

Modern Type-A

Street Light

Features

- GI made housing.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.



Applications

- Public area lighting like parks & squares
- Courtyards
- Mini street lighting
- Residential area lighting
- Smaller roadways
- Private driveways



Specification

MODEL	NL 4425	NL 4426 - S/R	NL 4427 - S/R
LED	Osram	Osram	Osram
POWER	30W/45W	30W/45W	2x30W/2x45W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80	≥80
BEAM ANGLE	T1/T2/T3/T4	T1/T2/T3/T4	T1/T2/T3/T4
LUMINAIRE BODY	GI	GI	GI
OPTICS	PMMA CLEAR OPTIC LENSES	PMMA CLEAR OPTIC LENSES	PMMA CLEAR OPTIC LENSES
HOUSING COLOR	BLACK / DARK GREY	BLACK / DARK GREY	BLACK / DARK GREY
INPUT	220-240V AC	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9	>0.9
IP	IP65	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off	On-Off
HEAD DIMENSION	250x275MM	350x275MM	600x275MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C	-20°C ~ 50°C

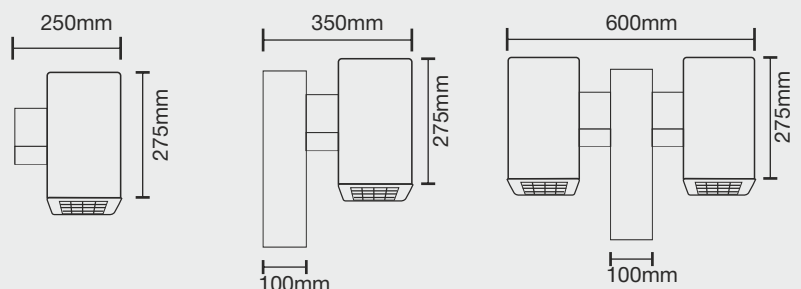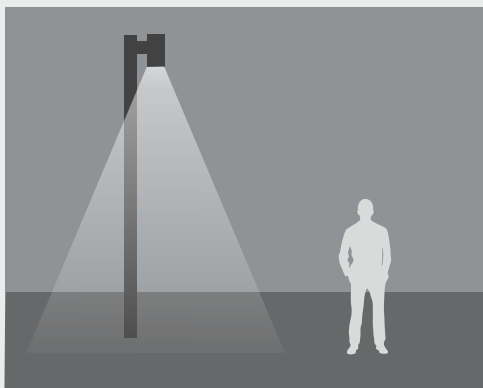

Modern Type-B

Street Light

Features


- GI made housing.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.

Applications

- Public area lighting like parks & squares
- Courtyards
- Mini street lighting
- Residential area lighting
- Smaller roadways
- Private driveways



Specification			
MODEL	NL 4428	NL 4429- S/R	NL 4430 - S/R
LED	Osram	Osram	Osram
POWER	30W/45W	30W/45W	2x30W/2x45W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80	≥80
BEAM ANGLE	T1/T2/T3/T4	T1/T2/T3/T4	T1/T2/T3/T4
LUMINAIRE BODY	GI	GI	GI
OPTICS	PMMA CLEAR OPTIC LENSES	PMMA CLEAR OPTIC LENSES	PMMA CLEAR OPTIC LENSES
HOUSING COLOR	BLACK / DARK GREY	BLACK / DARK GREY	BLACK / DARK GREY
INPUT	220-240V AC	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9	>0.9
IP	IP65	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off	On-Off
HEAD DIMENSION	400x150MM	600x150MM	900x150MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C	-20°C ~ 50°C

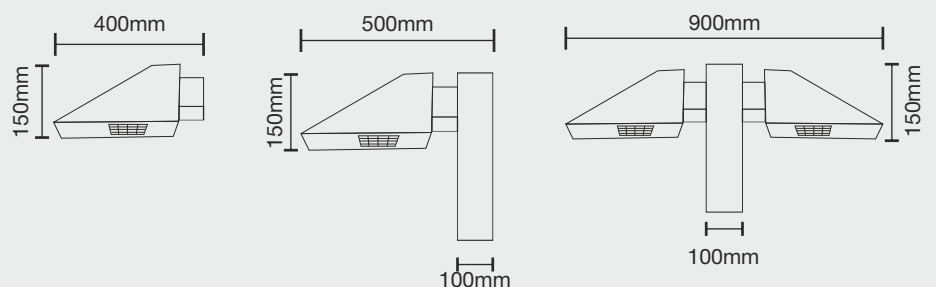



Modern Type-C

Street Light

Features

- GI made housing.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.



Applications

- Public area lighting like parks & squares
- Courtyards
- Mini street lighting
- Residential area lighting
- Smaller roadways
- Private driveways



Specification

MODEL	NL 4431	NL 4432	NL 4433
LED	Osram	Osram	Osram
POWER	30W/45W	30W/45W	2x30W/45W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80	≥80
BEAM ANGLE	T1/T2/T3/T4	T1/T2/T3/T4	T1/T2/T3/T4
LUMINAIRE BODY	GI Pole	GI Pole	GI Pole
OPTICS	PMMA CLEAR OPTIC LENSES	PMMA CLEAR OPTIC LENSES	PMMA CLEAR OPTIC LENSES
HOUSING COLOR	BLACK / DARK GREY	BLACK / DARK GREY	BLACK / DARK GREY
INPUT	220-240V AC	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9	>0.9
IP	IP65	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off	On-Off
HEAD DIMENSION	265x275MM	365x275MM	630x275MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C	-20°C ~ 50°C

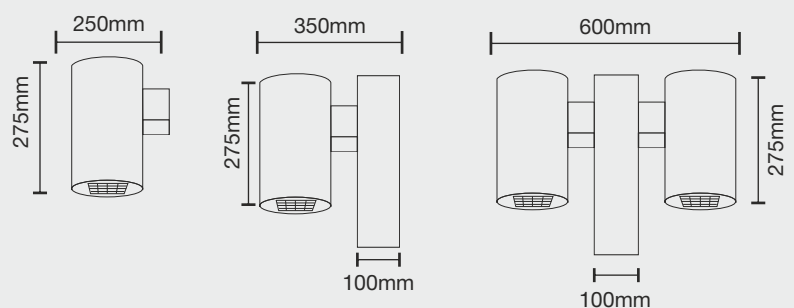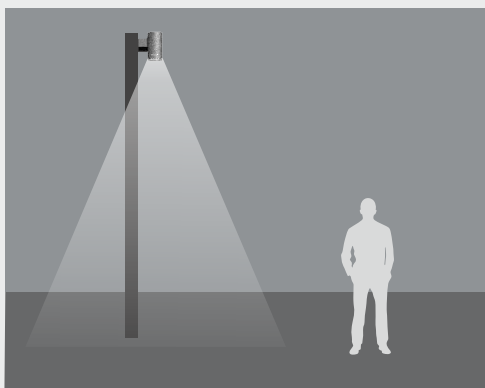




Outdoor Architectural Lighting

Modern Street Light

MODERN – STREET LIGHT
Specifically designed for wall-mounted and pathway lighting, making it versatile for different installation needs. **MS Housing with High Corrosion Resistance:** Features a mild steel (MS) housing that is treated for high resistance to corrosion, ensuring durability and long-lasting performance in outdoor environments. **Stone Wash Surface Treatment:** The surface undergoes a stone wash treatment before the painting process, which enhances the finish and increases the fixture's durability. **Glare-Free Illumination:** Provides glare-free lighting to ensure a comfortable and effective illumination of the ground surface.

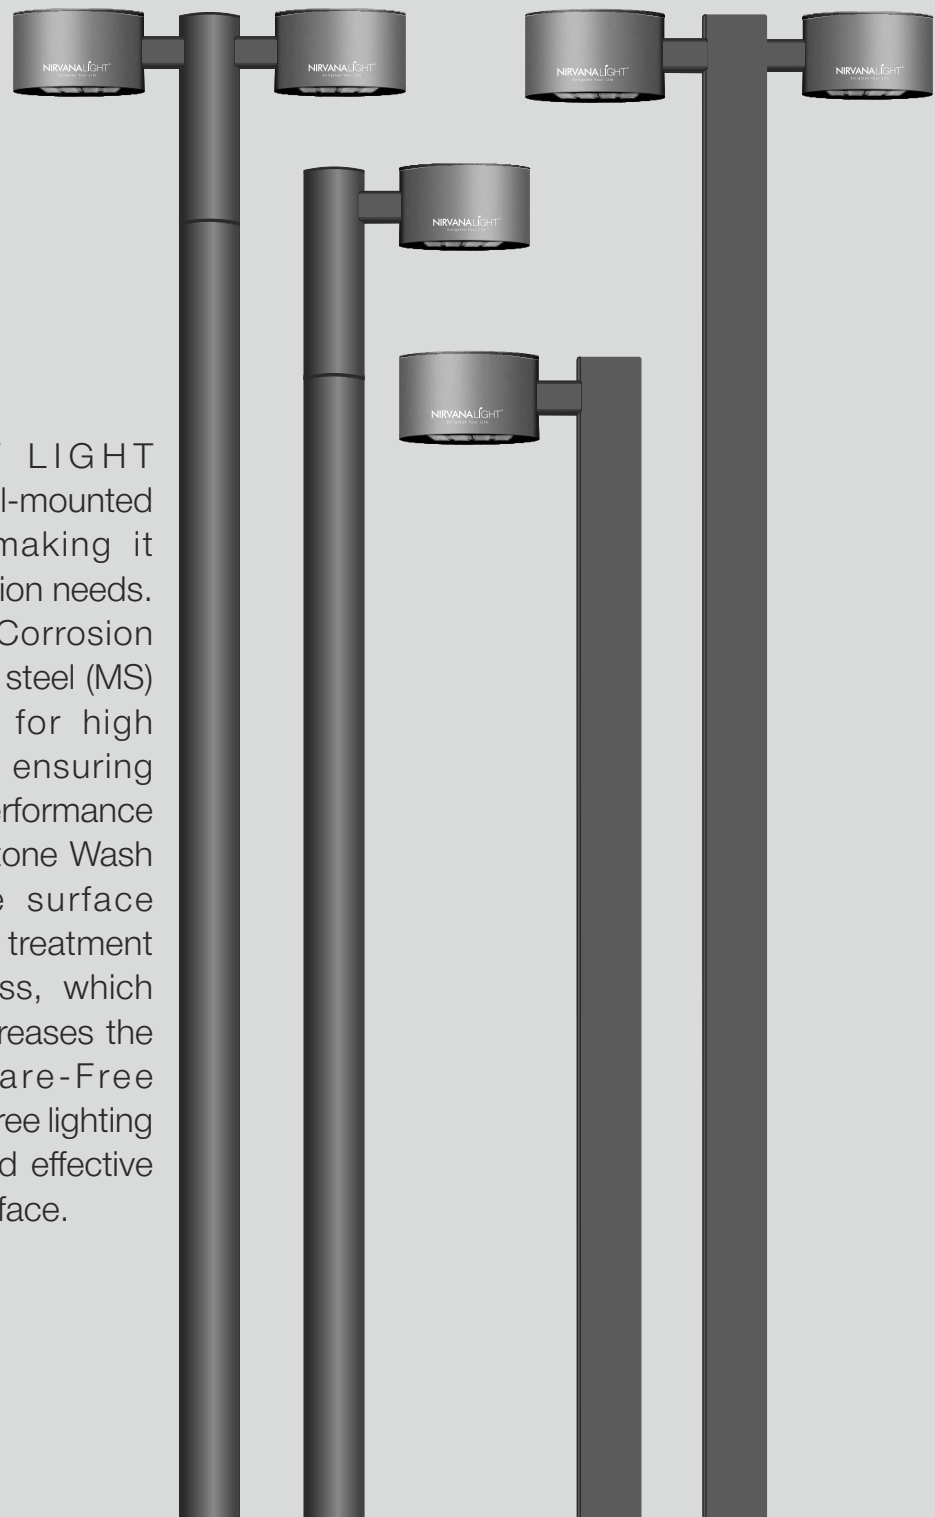

Modern Type Drums-R Street Light

Features

- GI made housing.
- Non-corrosive SS fasteners.
- Product supplied pre-wired cable gland compliance to IP67 rating
- Silicon gasket.

Applications


- Public area lighting like parks & squares
- Courtyards
- Mini street lighting
- Residential area lighting
- Smaller roadways
- Private driveways



NL 4435






NL 4436



Specification

MODEL	NL 4435	NL 4436
LED	Osram	Osram
POWER	30W/45W	2x30W/45W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80
BEAM ANGLE	T1/T2/T3/T4	T1/T2/T3/T4
LUMINAIRE BODY	GI	GI
OPTICS	PMMA CLEAR OPTIC LENSES	PMMA CLEAR OPTIC LENSES
HOUSING COLOR	BLACK/DARK GREY	BLACK/DARK GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP RATING	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off
HEAD DIMENSION	380x120MM	600x120MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C

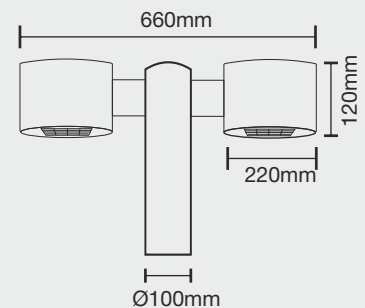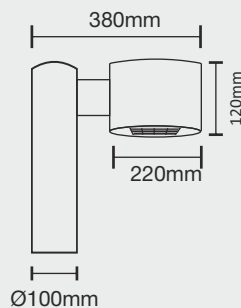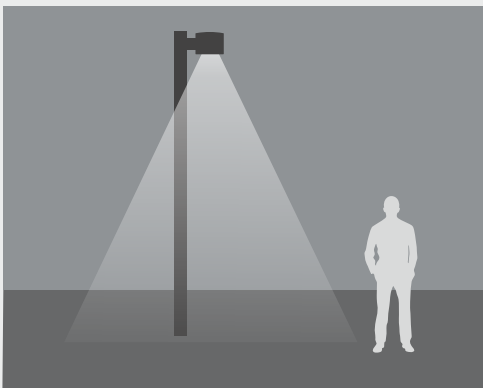

Modern Type Drums-S Street Light

Features


- GI made housing.
- Non-corrosive SS fasteners.
- Product supplied pre-wired cable gland compliance to IP67 rating
- Silicon gasket.

Applications

- Public area lighting like parks & squares
- Courtyards
- Mini street lighting
- Residential area lighting
- Smaller roadways
- Private driveways



NL 4437



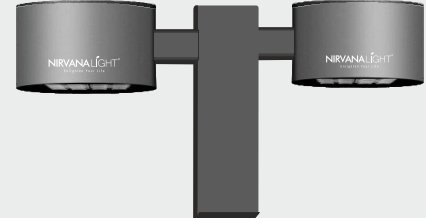


NL 4438



Specification

MODEL	NL 4437	NL 4438
LED	Osram	Osram
POWER	30W/45W	2x30W/45W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80
BEAM ANGLE	T1/T2/T3/T4	T1/T2/T3/T4
LUMINAIRE BODY	GI	GI
OPTICS	PMMA CLEAR OPTIC LENSES	PMMA CLEAR OPTIC LENSES
HOUSING COLOR	BLACK/DARK GREY	BLACK/DARK GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP RATING	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off
HEAD DIMENSION	380x120MM	660x120MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C

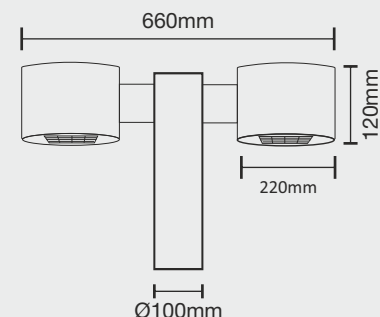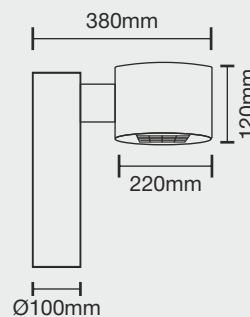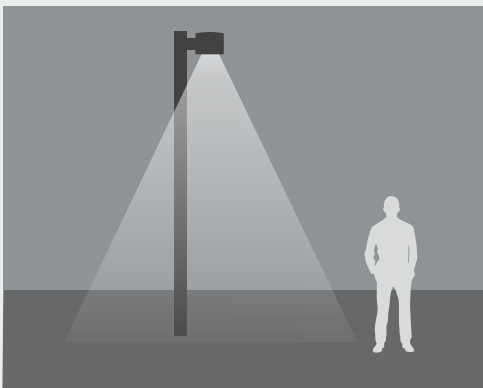






Outdoor Architectural Lighting

Vertilux Bollards & Poles Lighting

The VERTILUX - Bollards & Poles are an excellent choice for various outdoor lighting needs, combining durability, performance, and aesthetic appeal. Designed to provide glare-free lighting, ensuring comfortable and efficient illumination of the ground surface.

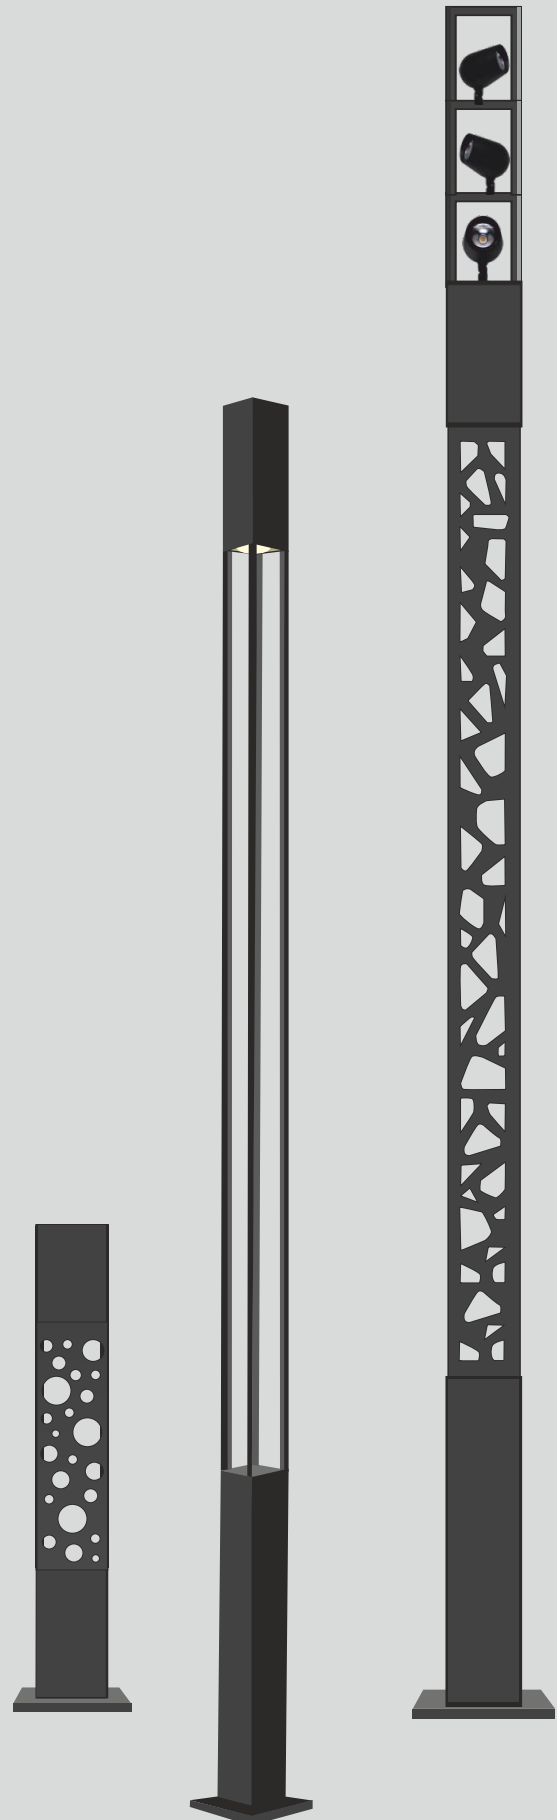

Vertiux Bollards & Poles Loght

Bollards- 150x150

NL 4461-ST
height 1 mtr


NL 4461-LD1
height 1 mtr

NL 4461-LD2
height 1 mtr

NL 4461-LD3
height 1 mtr

NL 4461-LD4
height 1 mtr

NL 4461-LD5
height 1 mtr

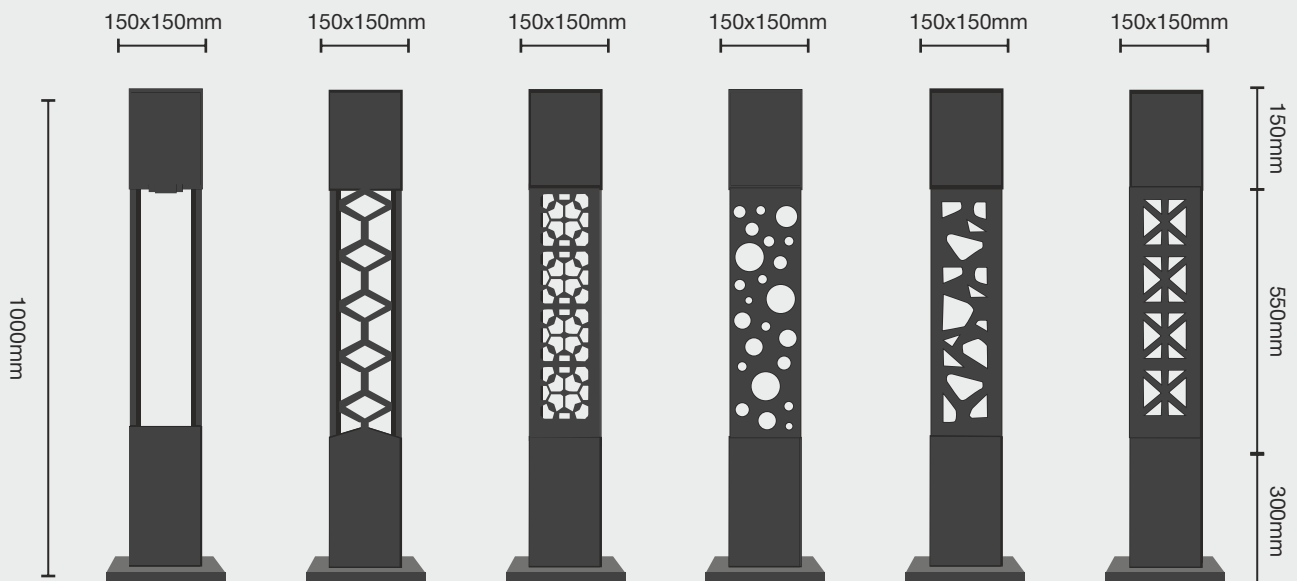

Vertiux Bollards & Poles Light

Design - Laser Cut -150x150

NL 4462-150-ST
height 3 mtr



NL 4462-150-LD1
height 3 mtr

NL 4462-150-LD2
height 3 mtr

NL 4462-150-LD3
height 3 mtr

NL 4462-150-LD4
height 3 mtr

NL 4462-150-LD5
height 3 mtr

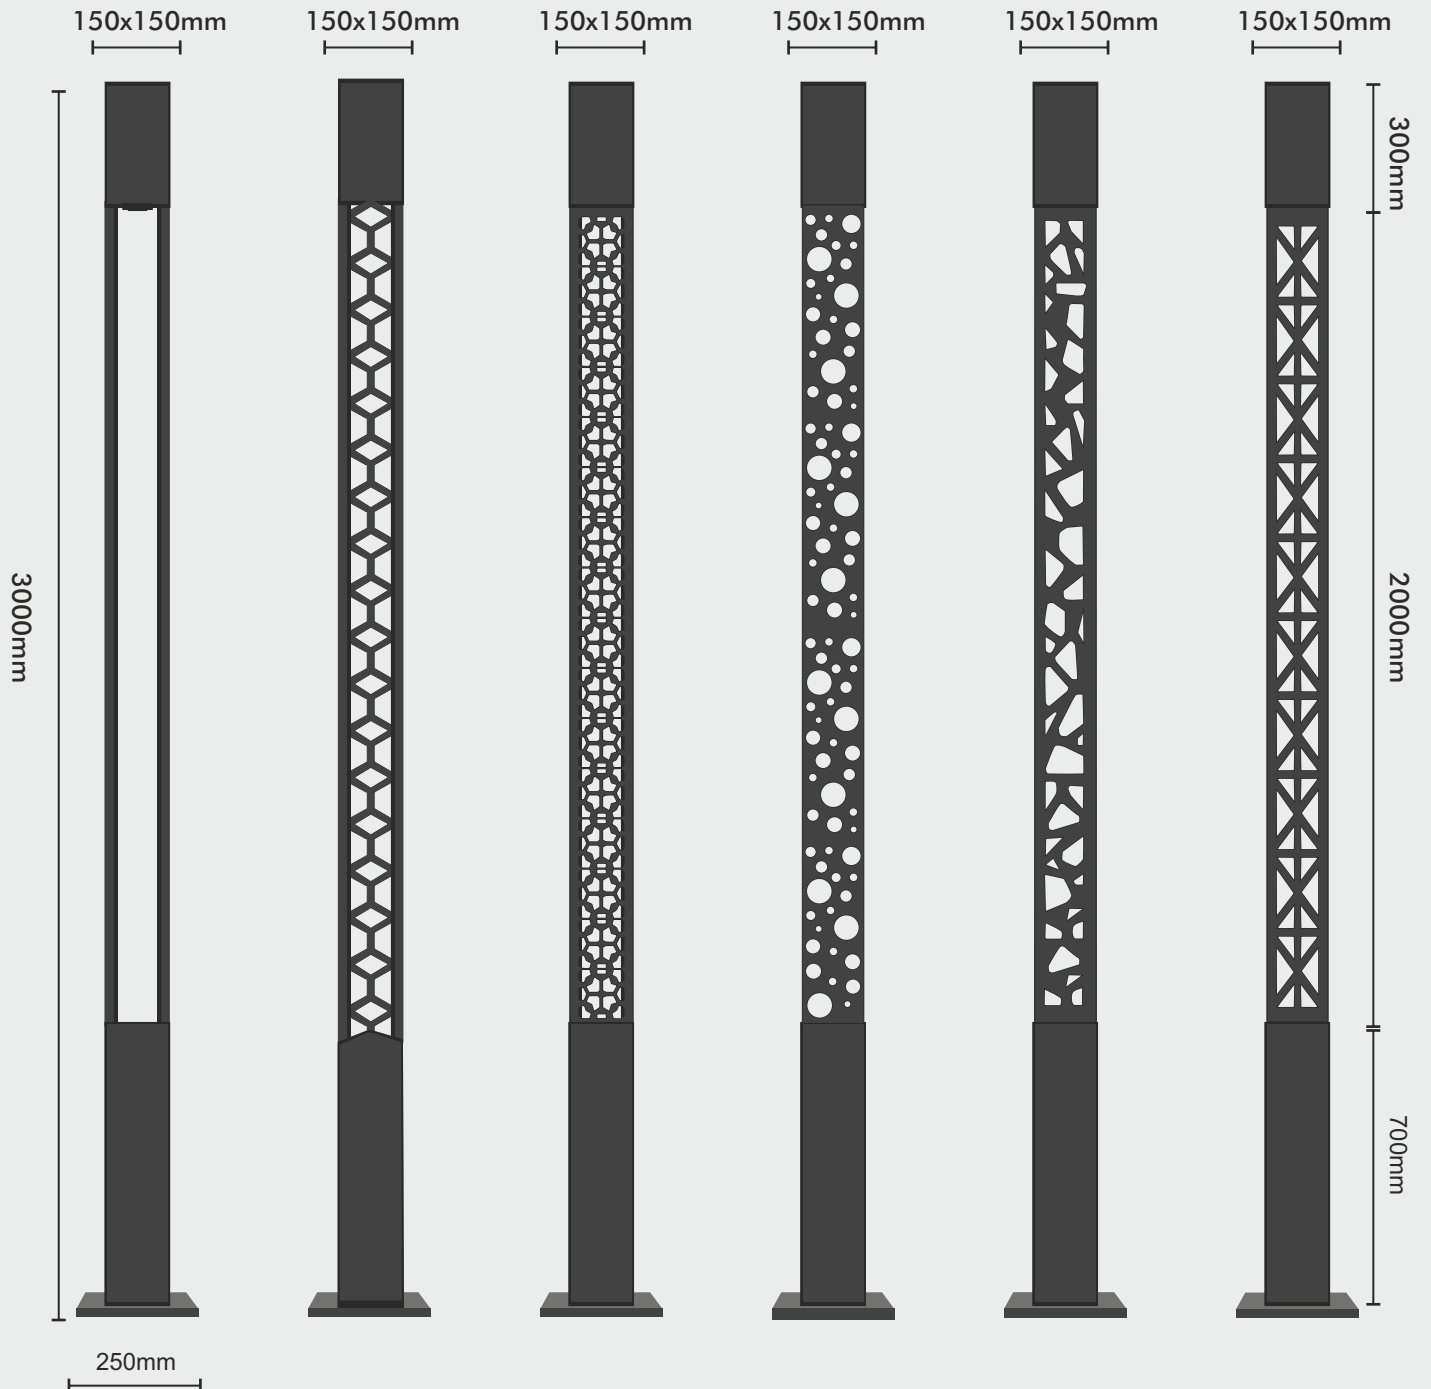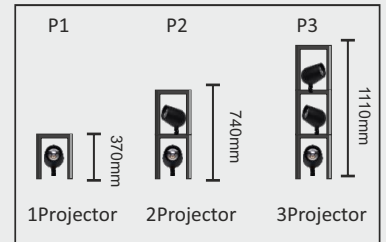

Design - Laser Cut -200x200

NL 4462-200-ST
height 3 mtr



NL 4462-200-LD1
height 3 mtr

NL 4462-200-LD2
height 3 mtr



NL 4462-200-LD3
height 3 mtr

NL 4462-200-LD4
height 3 mtr


NL 4462-200-LD5
height 3 mtr

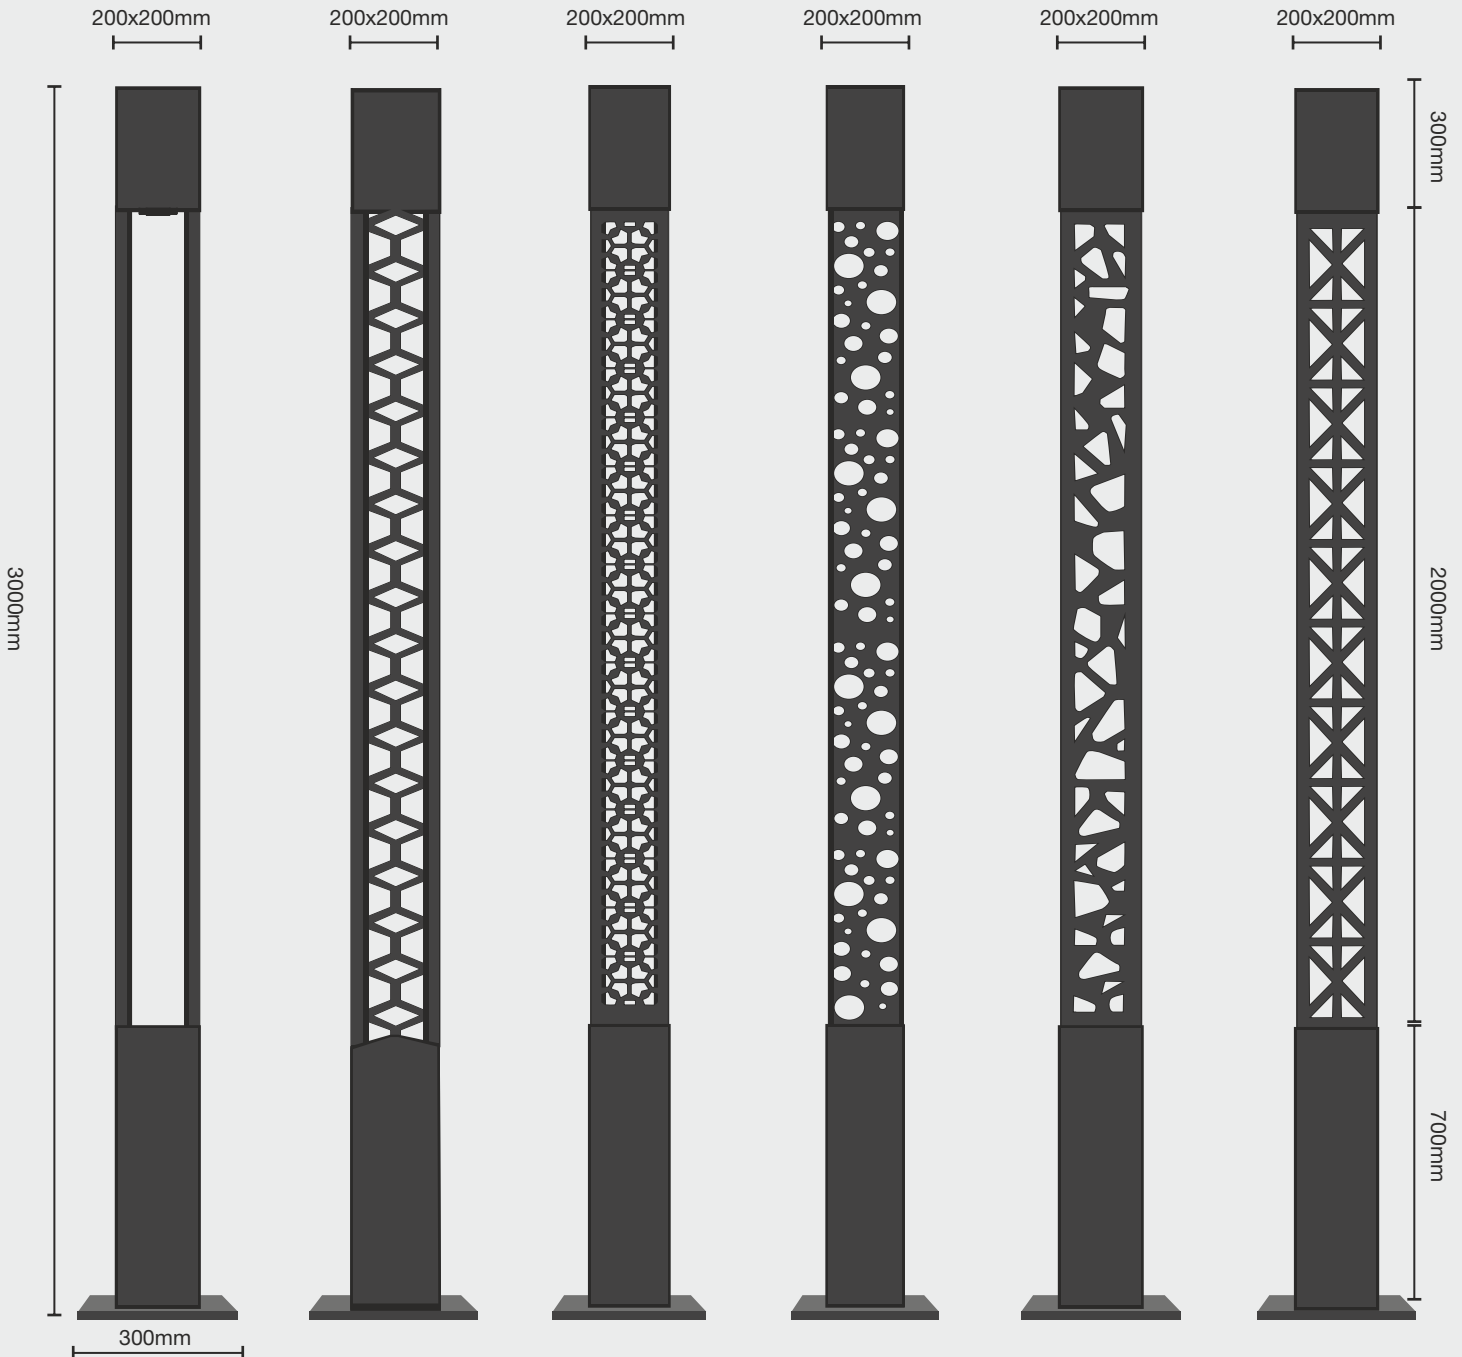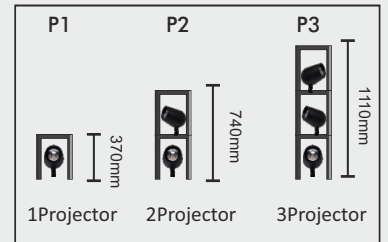


DIMENSION

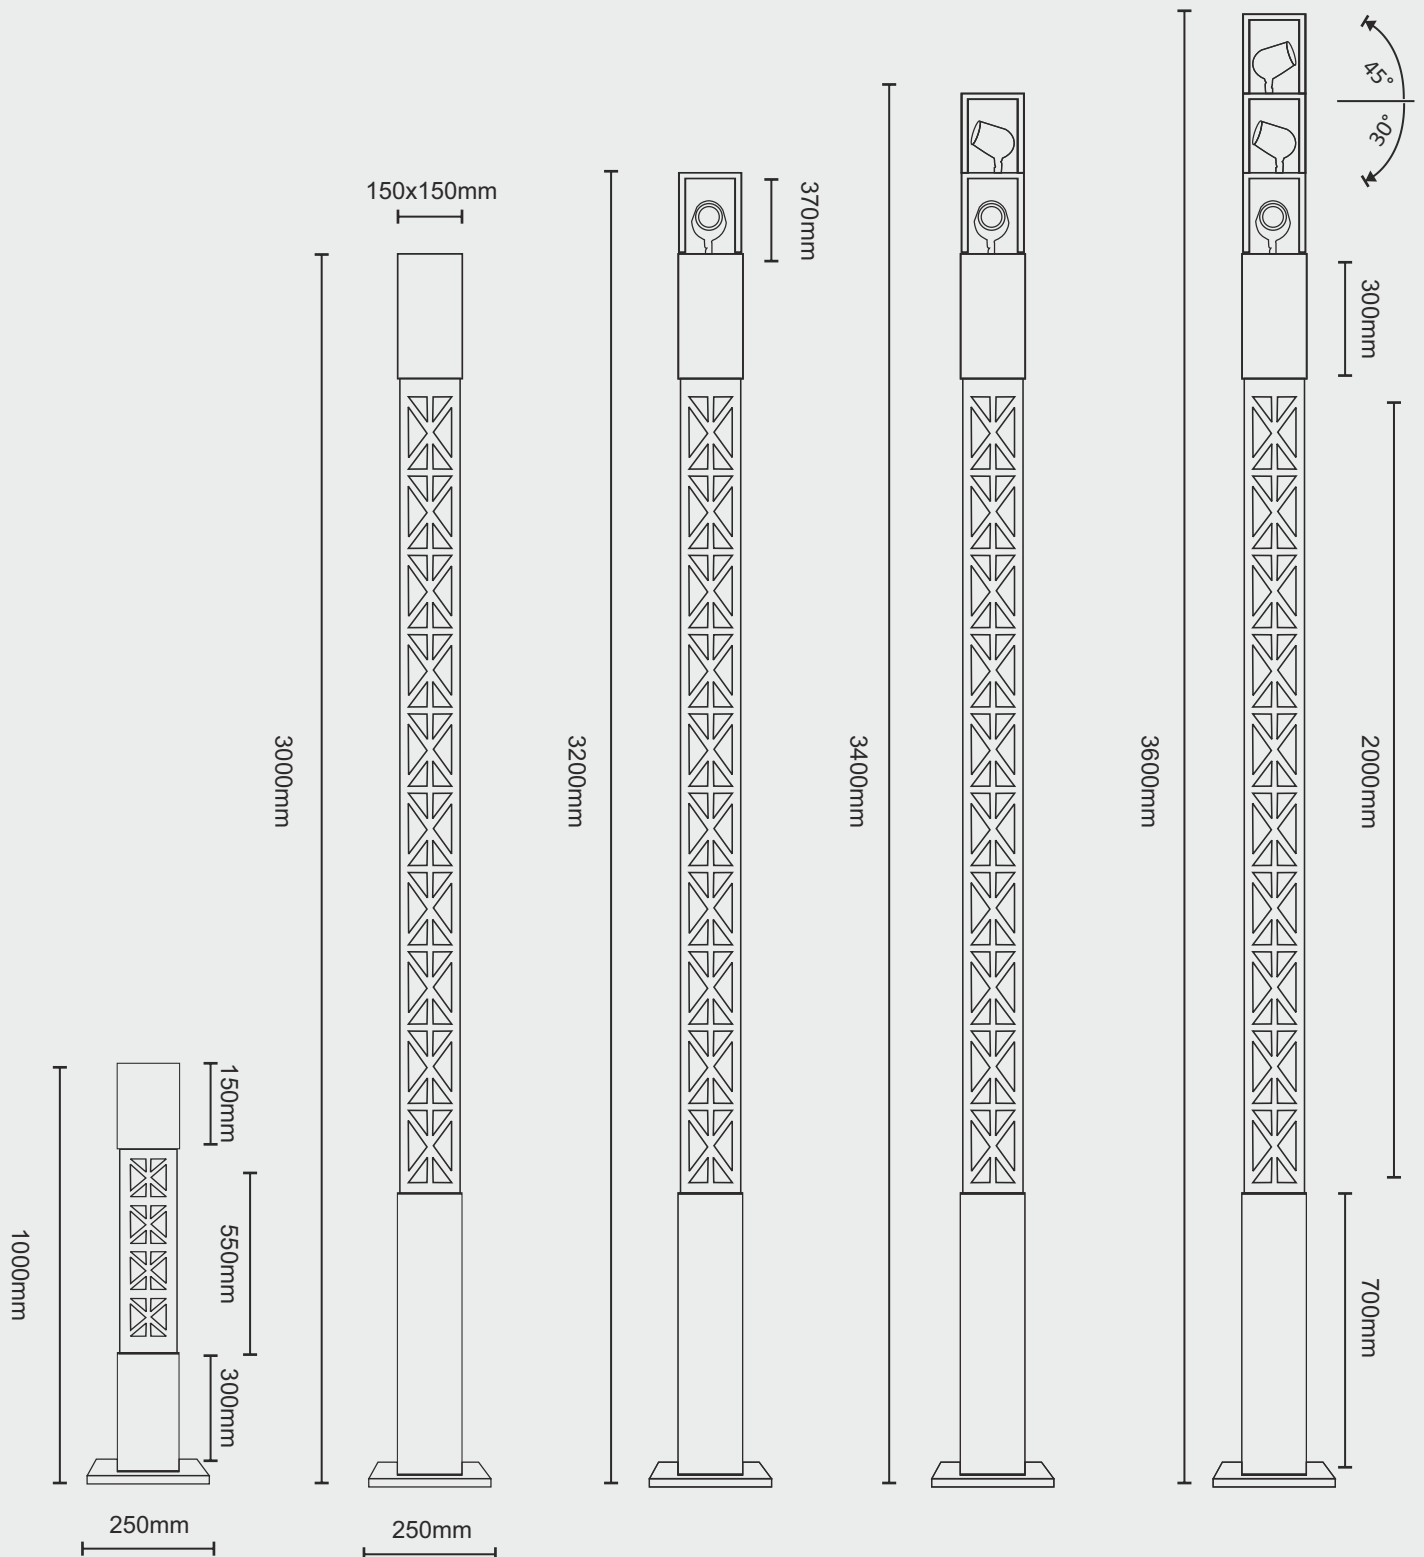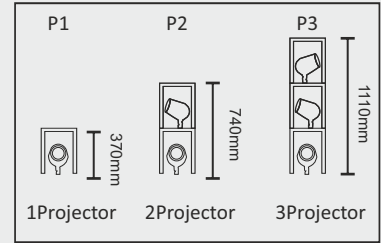

TECHNICAL DETAILS

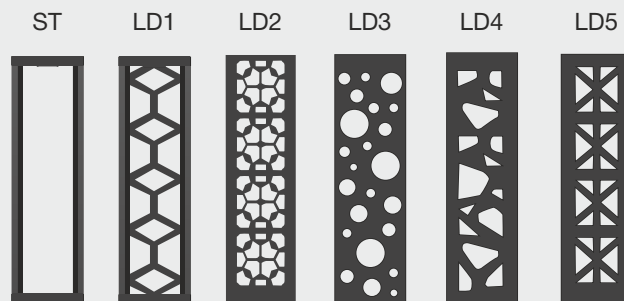

Customized Design Available



Specification (bollard)		Specification (pole)		
LED	OSRAM	LED	OSRAM	OSRAM
POWER	15W/25W	POWER	25W/35W/50W	25W/35W/50W
CCT(K)	3000K/4000K/6000K	CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	CRI	≥80	≥80
BEAM ANGLE	DIFFUSED	BEAM ANGLE	DIFFUSED	DIFFUSED
LUMINAIRE BODY	GI	LUMINAIRE BODY	GI	GI
OPTICS	PMMA CLEAR OPTIC LENSES	OPTICS	PMMA CLEAR OPTIC LENSES	PMMA CLEAR OPTIC LENSES
HOUSING COLOR	BLACK/DARK GREY	HOUSING COLOR	BLACK/DARK GREY	BLACK/DARK GREY
INPUT	220-240V AC	INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	POWER FACTOR	>0.9	>0.9
IP	IP65	IP	IP65	IP65
CONTROL & DIMMING	ON-OFF	CONTROL & DIMMING	ON-OFF	ON-OFF
DIMENSION	150X150	DIMENSION	150X150	200X200
BOLLARD HEIGHT	1Mtr	POLE HEIGHT	3Mtr	3Mtr
WORKING TEMP	-20°C ~ 50°C	WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C

Projector

NEO-N 65




65MM - 3/6W
510 lm
3K/4K/6K

NEO-N 95

95mm - 8/20W
2000 lm
3K/4K/6K

NEO-N 140

140mm - 20/60W
4000 lm
3K/4K/6K

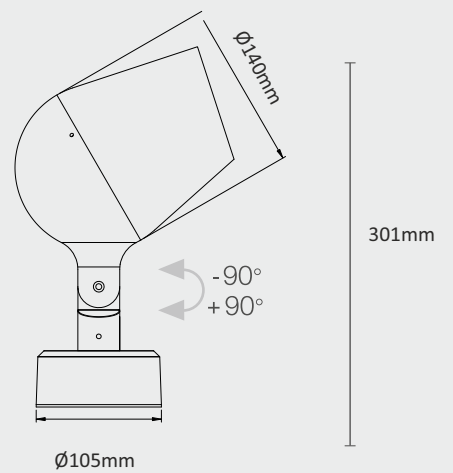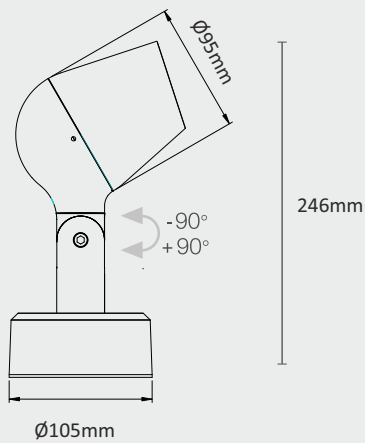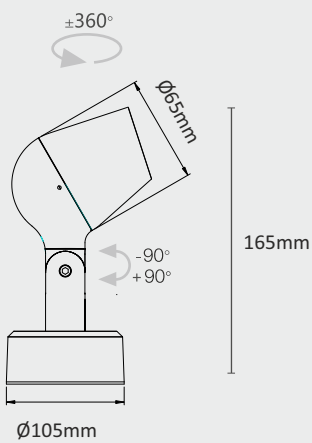

HOW TO ORDER USING PRODUCT CODE


Product	Size	Design	Single projector	Dual projector	Triple projector	Code
Bollard (1Mtr)	150	ST	×	×	×	4461-150-ST
		LD1 LD2/LD3/ LD4/LD5	×	×	×	4461-150-LD1 <i>LD2/LD3/ LD4/LD5</i>
Pole (3Mtr)	150	ST	×	×	×	4462-150-ST
		LD1 LD2/LD3/ LD4/LD5	×	×	×	4462-150-LD1 <i>LD2/LD3/ LD4/LD5</i>
Pole (3Mtr)	200	ST	×	×	×	4463-200-ST
		LD1 LD2/LD3/ LD4/LD5	×	×	×	4463-200-LD1 <i>LD2/LD3/ LD4/LD5</i>
Pole (3Mtr)	150/200	ST	✓	×	×	4462-150/200-ST-P1
		LD1 LD2/LD3/ LD4/LD5	✓	×	×	4462-150/200-LD1-P1 <i>LD2/LD3/ LD4/LD5</i>
Pole (3Mtr)	150/200	ST	✓	✓	×	4462-150/200-ST-P2
		LD1 LD2/LD3/ LD4/LD5	✓	✓	×	4462-150/200-LD1-P2 <i>LD2/LD3/ LD4/LD5</i>
Pole (3Mtr)	150/200	ST	✓	✓	✓	4462-150/200-ST-P3
		LD1 LD2/LD3/ LD4/LD5	✓	✓	✓	4462-150/200-LD1-P3 <i>LD2/LD3/ LD4/LD5</i>

* NL 4461= Bollard Series
NL 4462= Pole 150x150 Series
NL 4463= Pole 200x200 Series


150x150 = Pole Size
200x200 = Pole Size

ST= Stud
LD= Laser Design


P1= Pole with 1 Projector
P2= Pole with 2 Projector
P3= Pole with 3 Projector

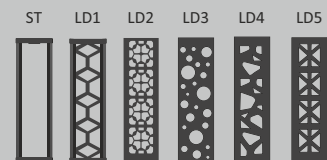





Outdoor Architectural Lighting

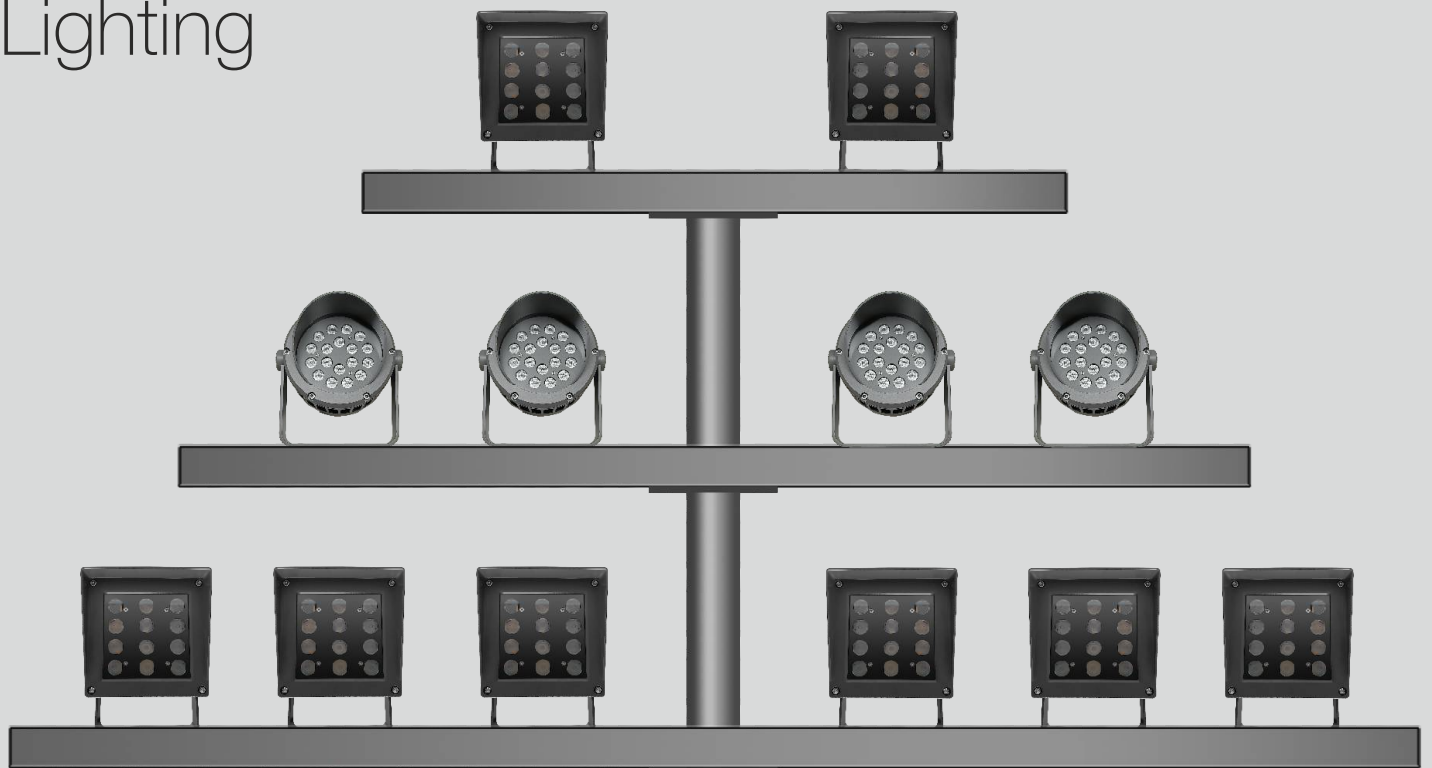

Facade Lighting System

ACADE - Lighting System
Aluminium Housing with High Corrosion Resistance: Constructed from aluminium, the housing offers excellent resistance to corrosion, ensuring durability and performance in outdoor environments.
Stone Wash Surface Treatment: The surface undergoes a stone wash treatment before painting, enhancing the finish and durability of the fixture.
Glare-Free Illumination: Provides glare-free lighting to ensure comfortable and effective illumination of the ground surface.

FACADE

Lighting System

Features

- Aluminum extruded Die cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.

Applications


- Entrances
- Malls
- Theaters
- Malls
- Public Areas
- Sculptures and Monuments
- Compound Periphery



FLD - S1




FLD - S2



Specification

MODEL	NL-FLD-S1	NL-FLD-S2
LED	OSRAM	OSRAM
POWER	20W/30W	45W/60W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80/90	≥80/90
BEAM ANGLE	5°/30°/40°/60°/90°/120°	5°/30°/40°/60°/90°/120°
LUMINAIRE BODY	ALUMINUM BODY+	ALUMINUM BODY+
OPTICS	TOUGHENED CLEAR GLASS	TOUGHENED CLEAR GLASS
HOUSING COLOR	BLACK/GREY	BLACK/GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP	IP65	IP65
CONTROL & DIMMING	NON DIMMING	NON DIMMING
HEAD DIMENSION	141X110X193MM	240X157X307MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-40°C ~ 55°C	-40°C ~ 55°C

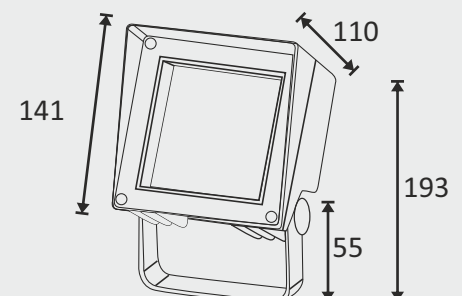

FACADE

Lighting System

Features

- Aluminum extruded Die cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.

Applications


- Entrances
- Malls
- Theaters
- Malls
- Public Areas
- Sculptures and Monuments
- Compound Periphery



FLD - R1





FLD - R2



Specification

MODEL	NL-FLD-R1	NL-FLD-R2
LED	OSRAM	OSRAM
POWER	24W/36W	54W/72W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥90	≥90
BEAM ANGLE	5°/30°/40°/60°/90°/120°	5°/30°/40°/60°/90°/120°
LUMINAIRE BODY	ALUMINUM BODY+	ALUMINUM BODY+
OPTICS	TOUGHENED CLEAR GLASS	TOUGHENED CLEAR GLASS
HOUSING COLOR	BLACK/GREY	BLACK/GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP	IP65	IP65
CONTROL & DIMMING	NON DIMMING	NON DIMMING
DIMENSION	235x260MM	265x290MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-40°C ~ 55°C	-40°C ~ 55°C

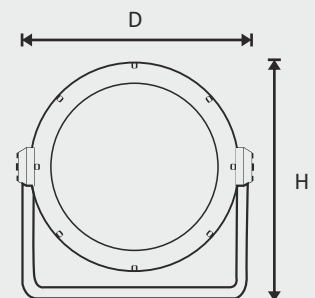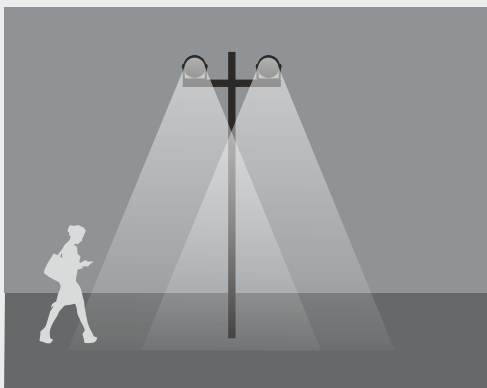

FACADE

Lighting System

Features

- Aluminum extruded Die cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.

Applications

- Entrances
- Malls
- Theaters
- Malls
- Public Areas
- Sculptures and Monuments
- Compound Periphery





4302



Specification

Model	NL 4302
Power (W)	15W/18W
Color Temperature (CCT)	3000K
Input Voltage	AC 220V-240V
Optics	Reflector
Beam Angle	20°/ 30°/ 40°/ 60°
Housing	Aluminum Die Cast
Finish	Dark Grey
Color Rendering Index (CRI)	>80
Protection Rating (IP)	IP65
Dimming	Non-Dimmable
Life Span (hours)	50,000 Hrs
Size	D : 82mm/H : 175mm

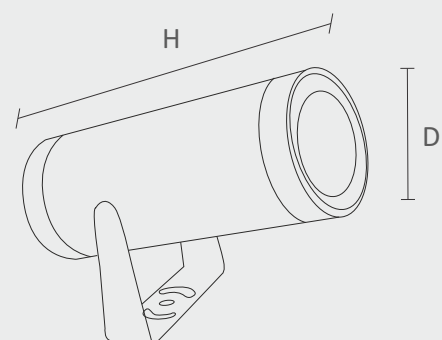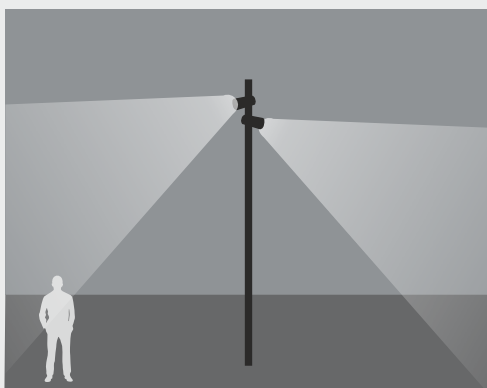



Outdoor Architectural Lighting

Street Lighting System

Various Sizes and Power Options: Available in different sizes and power levels to accommodate a wide range of lighting requirements.

Optical Elements: Equipped with advanced optical elements to meet diverse lighting needs, including area lighting, facade lighting, and other specific applications.

Adjustable Power and Color Temperature: Capable of providing sufficient power and adjustable color temperatures to suit different environments and lighting requirements.

Aluminium Body: Features a robust aluminium housing that offers excellent durability and resistance to corrosion, ensuring long-term performance.

Steel Mounting: Includes a steel mounting system for secure and stable installation.




Street Lighting System

Features

- Aluminum extruded Die cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners.
- Product supplied pre-wired cable gland compliance to IP67 rating
- Silicon gasket.


Applications

- Street Lighting
- Roadways
- Expressways
- Malls
- Stadium
- Courtyards
- Public area lighting like parks & Squares.





Specification

LED	Osram	Osram	Osram	Osram
POWER	50W	100W	150W	200W
CCT(K)	27K/3K/4K/5K/6K/65K	27K/3K/4K/5K/6K/65K	27K/3K/4K/5K/6K/65K	27K/3K/4K/5K/6K/65K
CRI	≥70	≥70	≥70	≥70
BEAM ANGLE	70X140°	70X140°	70X140°	70X140°
LUMINAIRE BODY	ALUMINUM BODY	ALUMINUM BODY	ALUMINUM BODY	ALUMINUM BODY
LUMEN	130lm/W	130lm/W	130lm/W	130lm/W
HOUSING COLOR	GREY	GREY	GREY	GREY
INPUT	220-240V AC	220-240V AC	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9	>0.9	>0.9
IP RATING	IP65	IP65	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off	On-Off	On-Off
HEAD DIMENSION	470X180X110MM	560X240X115MM	690X280X130MM	740X280X130MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C	-20°C ~ 50°C	-20°C ~ 50°C

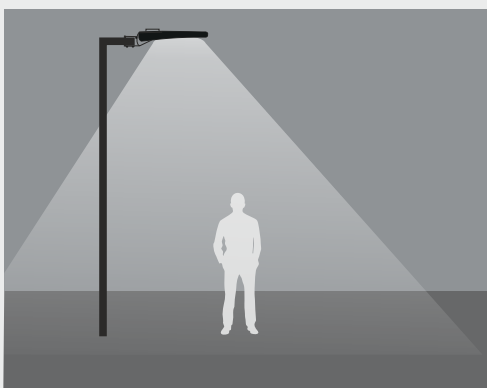

Bubble Level for Alignment

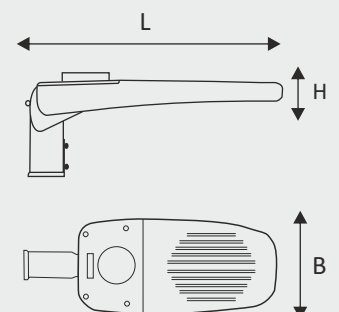



NIRVANALIGHT[®]
Enlighten Your Life

NIRVANA LIGHT[®]

Enlighten Your Life

NIRVANA LIGHTING PVT. LTD.

Regd. Office : 1301, Synergy Business Park, Sahakar Wadi,
Near Synthofine Industrial Estate, Goregoan (E), Mumbai - 400063.
Tel.: +91 22 4969 6903

Factory : A/52-61, Royal Ind. Hub, Bhiwandi-Kaman Road,
Palghar - 401208 Maharashtra.

E : sales2@nirvanalighting.in

Customer Care : +91 93723 79819

For more information
scan this QR Code



www.nirvanalighting.in/dd

