

Architectural Lighting Solutions



NIRVANA[®] LIGHT

Enlighten Your Life

निर्वाणा लाइट®

Enlighten Your Life

OUR PHILOSOPHY

With over 15 years of experience in the lighting industry, we have evolved into a fully integrated manufacturing company, specializing in the design, development, and production of high-quality luminaires.


Our company is primarily project-oriented, collaborating closely with architects and lighting designers on diverse and challenging projects.

We recognize that each project is unique and requires a tailored approach. We view challenges as opportunities to deliver luminaire solutions that meet the demands of our discerning customers.



N I R V A N A

History:

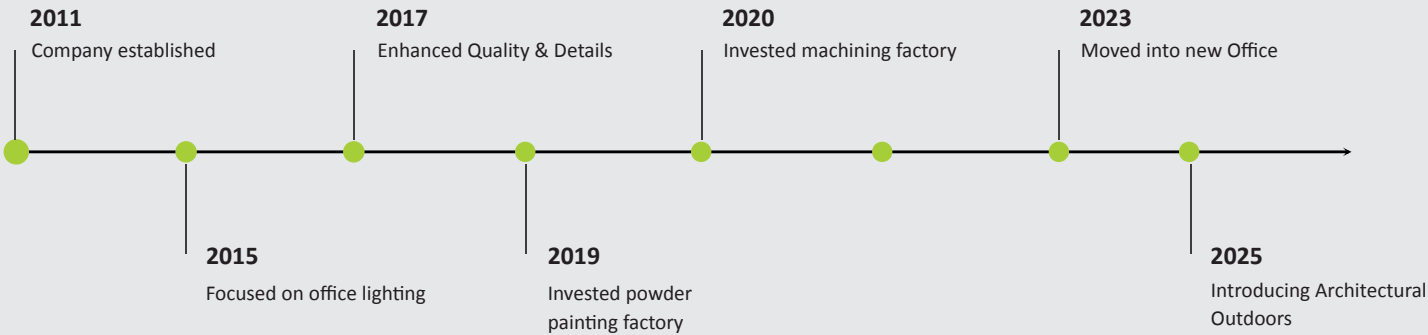

MINIMAL AND LINEAR

We work hard to ensure the minimum visual impact of our luminaires. No visible screws for an absolute clean and minimalistic aesthetic and no visible logo printed on our products. A minimal appearance that leaves the stage to the lamp instead of the fixture.

The focus on the details combined with LED technology led to the development of an outstanding range of luminaires.

Luminaires that disappear in the background for a total integration with architecture.

BESPOKE LUMINAIRES

It is not a secret that more than half of our turn over is generated by customized fixtures and bespoke luminaires.

Faithful to our vocation for bespoke luminaires, in NIRVANA LIGHT we are always keen to challenge ourselves by delivering fixtures that are made to fit the specific requirements of our high demanding customers.

Some of our projects are completely bespoke luminous installations that took months to manufacture and install. The results are always great as their expectations



Nirvana Light's comprehensive ability to design, manufacture, and distribute quality lighting fixtures has been well established over the years.

The essence of light is one of the most important elements in anyone's life. To enhance a building's form or design is a prerequisite for any lighting designer, and at Nirvana Light Pvt. Ltd., we believe it is our profession to excel in this process.

Founded in Mumbai, India, in 2011, Nirvana Light Pvt. Ltd. has emerged as a leading manufacturer of outdoor lighting and outdoor lighting applications.


Our success is built on a solid foundation of identifying our clients' requirements for sustainability, reliability, design, and functionality.

Our history reflects a commitment to taking the necessary steps to ensure our clients are presented with the best possible products and solutions every time.

We have invested significantly in understanding and integrating a combination of smart eco-technologies, innovative design, and efficient systems to help all clients reduce their environmental impact without compromising their desire for design and comfort.

Over the past 14 years of steady and continuous development, Nirvana Light Pvt. Ltd. has made great strides in enterprise management, quality enhancement, and technology innovation.



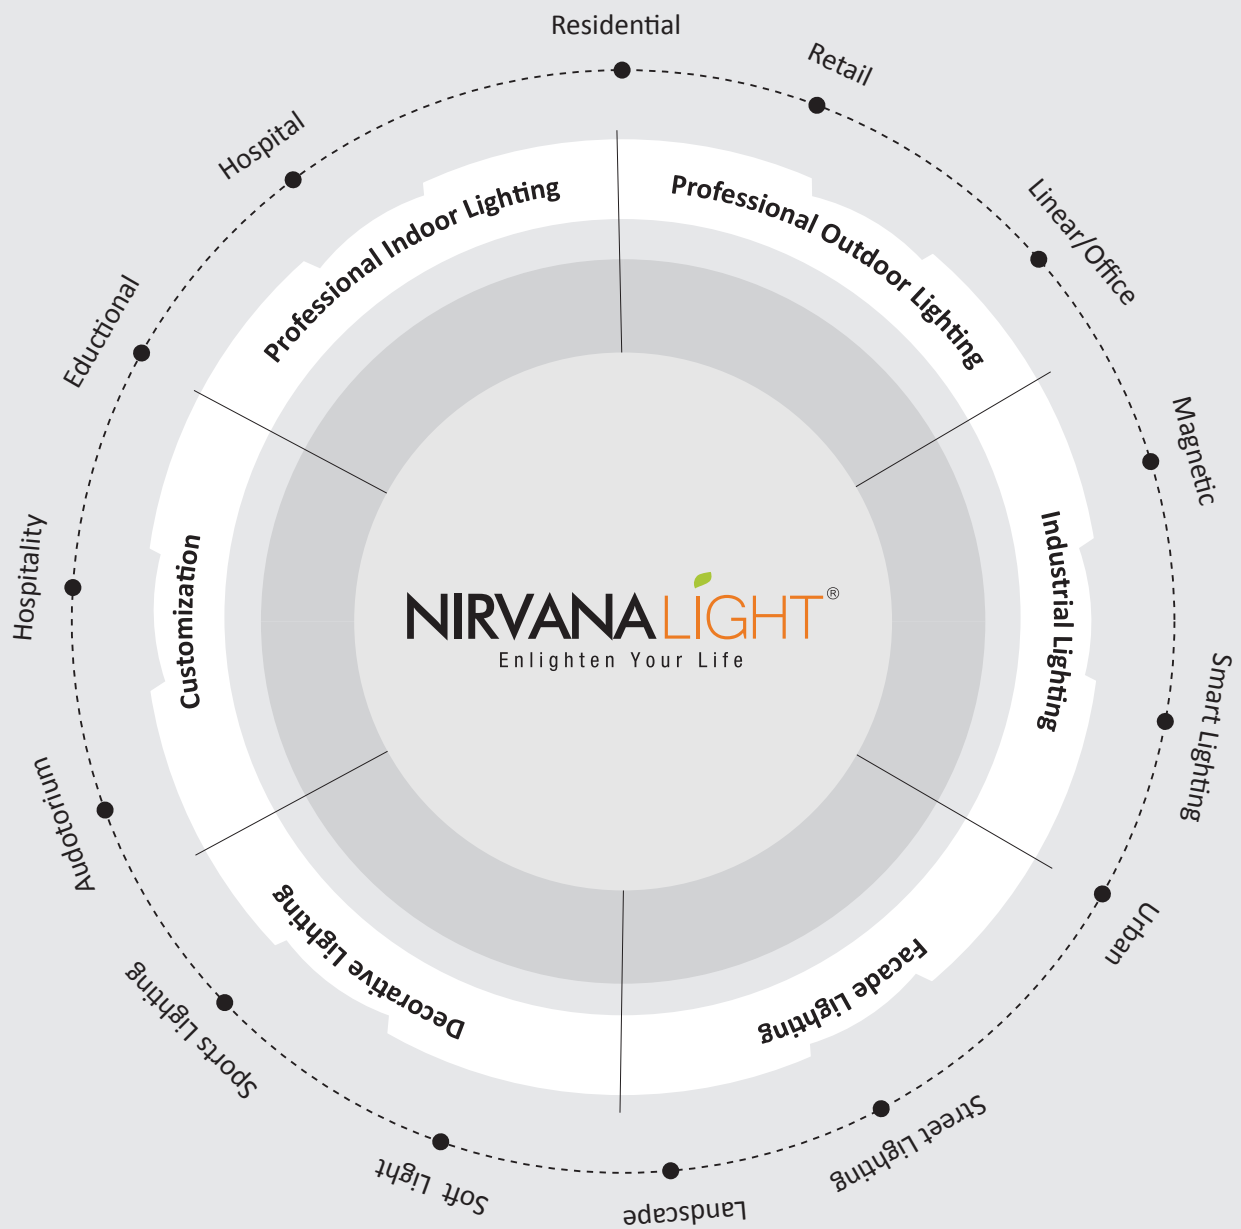



Logo | Trademark Are The Property Of The Respective Brands

Certificates:

UDYAM REG. CERTIFICATE



ZED CERTIFICATE



ISO CERTIFICATE





FACTORY CAPABILITIES

Quality Control



INWARD QC OF RAW MATERIAL

To ensure that all incoming raw materials meet the required specifications and are free of defects before they are used in production



IN-PROCESS QC AT EVERY STAGE OF PRODUCTION

To maintain quality control during the manufacturing process to catch any defects early and ensure the product is moving toward the desired quality standards.



QC AFTER ASSEMBLY

To verify that the product is correctly assembled and functional before moving to the final QC stage.



FINAL QC BEFORE DISPATCH

To conduct a thorough inspection before the product leaves the facility to ensure it is fully functional, aesthetically pleasing, and in compliance with all required standards.



SURFACE TREATMENT PROCESS (PRE-TREATMENT)

The surface treatment process is essential for ensuring that the product is durable, corrosion-resistant, and has a high-quality aesthetic.

- Rust removing - To remove any rust or oxidation from metal surfaces, ensuring proper adhesion of subsequent coatings.
- Primer coating - To apply a protective primer layer to the metal surface to ensure better adhesion of the final topcoat and enhance corrosion resistance.



PACKING PROCESS FOR TRANSIT SAFETY

Proper packing is essential to ensure that the products arrive safely at their destination without any damage. Packing material is used like thermocol, corner support, shrink wrap etc for transit safety.

Component Selections



INWARD QC CHECK

Every Component prior to production



LED MODULES

Utilizing the latest technology we have selected partners with specialized knowledge.



REFLECTOR

High grade LED CHIP & optically design reflector made from poly carbonate having top liquid aluminum coating (metalizing) offers up to 92% reflectivity




FLICKER FREE DRIVER

LED - Gold wire bonded SMD & Cob with high quality phosphor gives optimum efficacy of 180 lumen/watt at source level



BASE MATERIAL

Aluminum basic raw material is international die casting grade ADC 12 for indoor & LM6 for outdoor, aluminum extrusion we use special alloy 6063 ensure better thermal conductivity



GLASS

Lead-free extra clear toughened glass used



SILICON GASKET


Virgin grade silicon with stand temperature and harsh external environment offers excellent ingress protection (IP)



THERMAL GLUE / PASTE

Thermal conductive engineering grade specially developed for LED Japanese make glue is used.

- Lighting Design Support

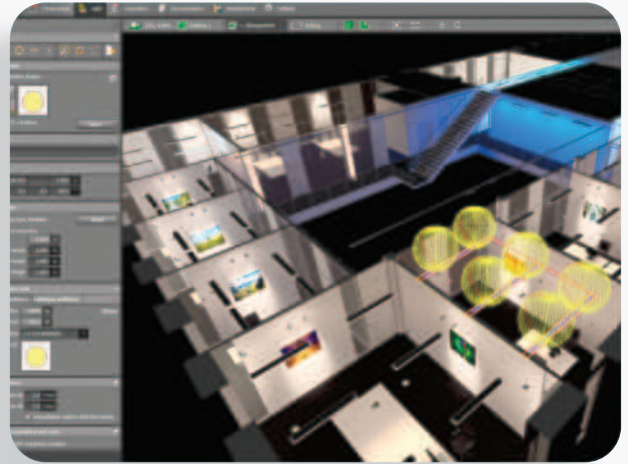


- Product Design Facility (customization)



- Pre & Post Site Service




- Installation & Commissioning Service

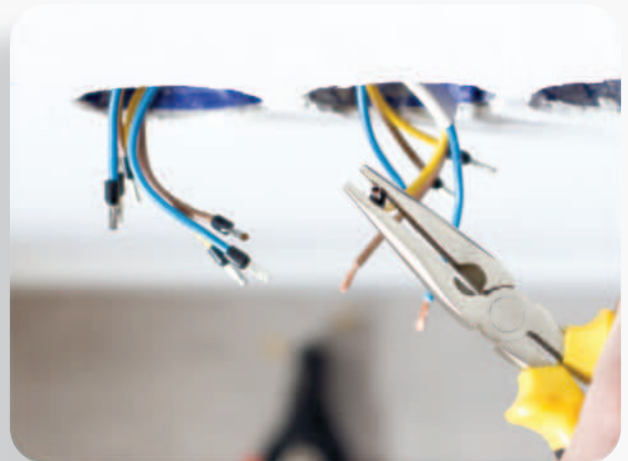

Our Valued Clients-Developers



Our Valued Clients-Educational



Our Valued Clients-Hospitality&Hotels



Deep Recessed Anti-Glare Chrome Series - CELESTIA



Deep Recessed Anti-Glare Chrome Series - TILTO



Detachable Chrome Series - TIRTH



Detachable Anti- Glare Chrome Series - TEJAS



Detachable Chrome Series - TRISHUL



Adjustable Surface Anti- Glare Series - SAURYA



Adjustable Recessed Anti- Glare Series - SAURYA




Detachable Anti-Glare Series - LOGUS




Deep Recessed Anti-Glare Chrome Series - NUBE

Fixed




NL 1601

Pg 27-29




NL 1602

Pg 27-29



NL 1603


Pg 27-29



NL 1606

Pg 31


Adjustable



NL 1607

Pg 31

Deep Recessed Series- CIRRUS




NL 1561

Pg 32-34



NL 1562

Pg 32-34



NL 1563

Pg 32-34



NL 1564

Pg 32-34

Trimless Series BULLET



NL 1525 WW Pg 35-37



NL 1525 WW-TL Pg 35-37

Fixed Down Slim Trim Deep Recessed Series- ALINA & Dual Tone



NL 0132 Pg 38-40



NL 0133 Pg 38-40



NL 0134 Pg 38-40



NL 0135 Pg 38-40



NL 0136 Pg 38-40

Fixed Down Lense Optics Series - FISSA & Dual Tone



NL 0137L Pg 41-42




NL 0131 Pg 41-42



NL 0135L Pg 41-42

Fixed Down METALLICA Series



NL 0141 Pg 43-45



NL 0142 Pg 43-45




NL 0137 Pg 43-45



NL 0138 Pg 43-45

Adjustable



NL 0137 Adj Pg 46

Adjustable



NL 0138 Adj Pg 46

Anti-Glare Black Series - SOOTHE



NL 1181 Pg 47-49




NL 1182 Pg 47-49



NL 1183 Pg 47-49


Fixed Down Light Adjustable Series - D-SIGNO

Recessed With Snoot



NL 1446 Pg 50-52

Recessed Without Snoot



NL 1446A Pg 50-52

Trimless With Snoot



NL 1456 Pg 50-52

Trimless Without Snoot



NL 1456A Pg 50-52



Fixed Down Light Adjustable Series - MOVE



Fixed & Adjustable Trimless Series- HIDO



AQUA IP Series



SMD Down Lights Series DAZZLE



Ceiling Recessed DownLight Series STRIKE




Ceiling Recessed DownLight Series STRIKE



Metallic Recessed Spot light Series STRIKE



NL 1414RG-CR Pg 74



NL 1415RG-CR Pg 74



NL 1416RG-CR Pg 74



NL 1414RG Pg 74



NL 1420 Pg 75-76

Even Recessed Wall Washer Series STRIKE



NL 1419 Pg 77-79



NL 1418 Pg 77-79



NL 1417 Pg 77-79

Anti-Glare Recessed Spot Light Series BRILLO



NL 1572 Pg 80-81



NL 1571 Pg 80-81

Anti-Glare Recessed Spot Light Series GLOWMAN



NL 1575 Pg 82



NL 1576 Pg 82

Recessed Spot Light Series- STRIKE MINIMA 32MM



NL 1421 Pg 83-84



NL 1422 Pg 83-84



NL 1423 Pg 83-84



NL 1441 Pg 83-84



NL 1442 Pg 83-84



NL 1443 Pg 83-84

Recessed Spot Light Series- STRIKE MAXIMA 54MM



NL 1424 Pg 85-87



NL 1425 Pg 85-87



NL 1426 Pg 85-87



NL 1427 Pg 85-87

Recessed Spot Light Series- STRIKE MAXIMA 54MM



NL 1428 Pg 88



NL 1429 Pg 88




NL 1430 Pg 88



NL 1431 Pg 88

Recessed Spot Light Series- STRIKE CIRCO



NL 1432 Pg 89-91



NL 1433 Pg 89-91



NL 1434 Pg 89-91



NL 1435 Pg 89-91

Surface Down Light Series OROFI




NL 1478

Pg 92-94



NL 1479

Pg 92-94



NL 1464

Pg 95



NL 1465

Pg 95



NL 1491

Pg 96



NL 1348-S1-S

Pg 96

Retail Recessed Downlight Series OPTIMA




NL 1086

Pg 97-99




NL 0391

Pg 97-99




NL 0427

Pg 97-99



NL 1328

Pg 100



NL 1329

Pg 100



NL 1330

Pg 100

Retail Track Series - TWIST



NL 1347-S3

Pg 101-103



NL 1348-S1

Pg 101-103



NL 1348-S2

Pg 101-103

Magnetic + Regular lights- CRUISER-20mm



NL ML20 S200-2000mm

Pg 105-108



NL ML20 R2 100-1000mm

Pg 105-108



NL ML20 R3 100

Pg 110



ACCESSORIES

Pg 111

Magnetic + Regular lights- CRUISER-20mm



NL ML20 LG300

Pg 112



NL ML20 LG600

Pg 112



NL ML20 ST006

Pg 112



NL ML20 ST012

Pg 112

Linear Diffused Track Spot

Linear Track Spot




NL ML20 SI012 ADJ

Pg 113



NL ML20 ST018 ADJ

Pg 113



NL ML20 SP007

Pg 113



NL ML20 SP012

Pg 113

Linear Track Spot Adjustable

COB Track Spot

Track Light- MINI MAGNETIC



NL MM S-100

Pg 116



NL MM R-100

Pg 116



NL MM SP006

Pg 117



NL MM RD-SP08

Pg 117



NL MM LG300

Pg 118



NL MM ST010







Pg 118



ACCESSORIES

Pg 119

MATRIX

Surface 	Recessed 	Deep Recessed 	Suspended/Surface 	Suspended 
NL MS 5235 Pg 123	NL MS 6535 Pg 124	NL MS 5050 Pg 125	NL MS 3570 Pg 126	NL MS 4475 Pg 127
Suspended 	Suspended/Surface 	Curve Suspended 	Suspended 	Customised 
NL MS 5275 Pg 128	NL MS 5577 Pg 129	NL CUR-45 Pg 130	NL CUR-4078 Pg 131	Pg 132


Curved Surface/
Suspended/
Recessed

Suspended/Surface 	Recessed 
NL CUR 5275 Pg 136	Pg 137


Profile
Recessed/Surface
/Suspended-
VENUS

Drum 	Hexa 	Donut 
NL 5086 Pg 140	Pg 142	Pg 144

Surface/
Suspended-
CURVED END



ACOUSTIC
Profile Light

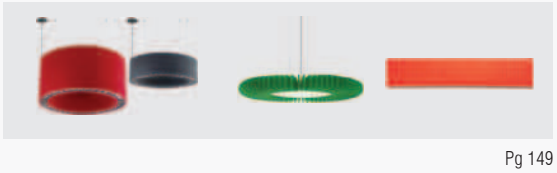

ABSTRACT
Profile Light




* The beauty of Nirvana Light lies in its authentic presence. While we aim for true-to-life representation, please expect that actual product colors and dimensions may vary slightly from what you see in our catalog or online.


Surface & Spike Light- GARDO



Wall One-way Light- KUBO

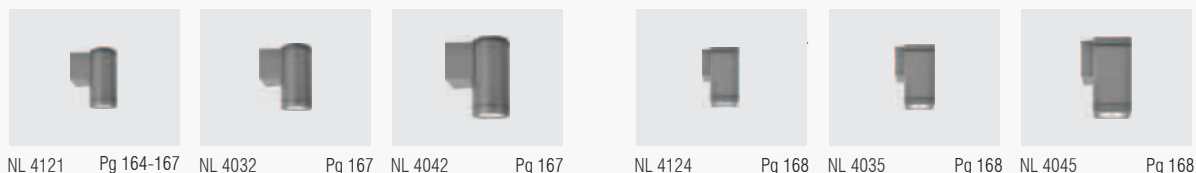


Wall Up-Down Light- KUBIC

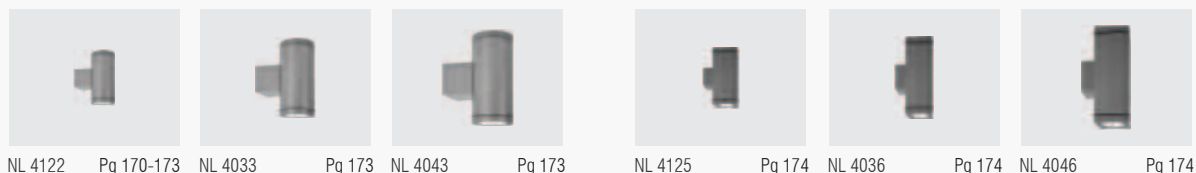

Ceiling Surface Light- OKIO




CeilingSurface Light- GUIDE

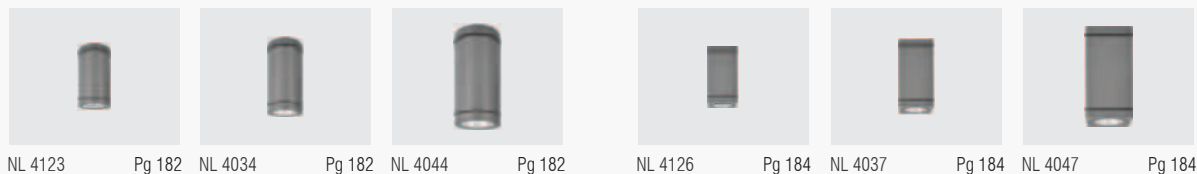

* The beauty of **Nirvana Light** lies in its authentic presence. While we aim for true-to-life representation, please expect that actual product colors and dimensions may vary slightly from what you see in our catalog or online.


In-Ground Light- GLEAM SERIES




NL 4505 Pg 186-189



NL 4509 Pg 186-189



NL 4510 Pg 190




NL 4511 Pg 190


Floor Washer/ Foot Light- LUCIA




NL 4501 Pg 191-194




NL 4501 A Pg 194




NL 4502 Pg 194



NL 4501 B Pg 195




NL 4501 C Pg 195




NL 4501 D Pg 195
NL 4029


Floor Washer/ Foot Light- LORENZA (Wall Surface)




NL 4203 Pg 196-198



NL 4204 Pg 198



NL 4205 Pg 198




NL 4206 Pg 198


Floor Washer/ Foot Light- LORENZA (Wall Recessed)




NL 4208 Pg 199



NL 4209 Pg 199



NL 4210 Pg 199



NL 4211 Pg 199

Bollard Light- NUVO-NL 100



NL 4321 Pg 200-203



NL 4322 Pg 203



NL 4323 Pg 203




NL 4324 Pg 203



NL 4325 Pg 203

NUVO-NL 140



NL 4331 Pg 204




NL 4332 Pg 204



NL 4333 Pg 204



NL 4334 Pg 204



NL 4335 Pg 204

NUVO-NL 165



NL 4341 Pg 205



NL 4342 Pg 205



NL 4343 Pg 205



NL 4344 Pg 205



NL 4345 Pg 205



NL 4544 Pg 206
NL 4347

Bollard Light- TREND



NL 4401 Pg 207-210



NL 4402 Pg 210



NL 4403 Pg 210

Bollard Light- SLIM TREND



NL 4355 Pg 211-213



NL 4356 Pg 211-213



NL 4357 Pg 211-213

Bollard Light- TREND (ADJUSTABLE LENS)



NL 4405 Pg 214-216



NL 4406 Pg 216



NL 4407 Pg 216



NL 4408 Pg 216

Bollard Light- SINGLE / DUAL



NL 4409 Pg 219-221



NL 4410 Pg 221

Bollard Light- SENSOR SERIES



NL 4409 Pg 222-224

Architectural Garden Light




NL 4405 Pg 225-227




NL 4406 Pg 228



NL 4407 Pg 229




NL 4408 Pg 230




NL 4408 Pg 231


Pole Light - SLIMO




100x 2630 Pg 232-235




140x3630 Pg 235



165x2630 Pg 236



165x3930 Pg 236




165x 4230 Pg 236

Pole Light - GLOWSPIRE STICK



NL 4350 Pg 237-239



NL 4351 Pg 239

Modern Street Light - MARELLO



NL 4412 Pg 240-242



NL 4415 Pg 243




NL 4419 Pg 244



NL 4420 Pg 245




NL 4423 Pg 246



NL 4424 Pg 246

Bollard & Pole Light- ATRIA



NL 4382

Pg 247-250



NL 4386

Pg 251

Pole Light- SQUARO




NL 4421

Pg 252-255

NL 4422

Pole Light- GALAXY POST TOP



NL 4390

Pg 256-258




NL 4391

Pg 258




NL 4392

Pg 258



NL 4393

Pg 260



NL 4394

Pg 260

Street Light- PHARO




NL 4390

Pg 261-265




Pg 261-265




Pg 261-265

Street Light- BEACONGLOW



NL 4390

Pg 266-267



NL 4391

Pg 266-267

Street Light- MODERN TYPE-A



NL 4425

Pg 268-270



NL 4426 S

Pg 270




NL 4427 S

Pg 270



NL 4426 R

Pg 270



NL 4427 R

Pg 270

TYPE-B



NL 4428

Pg 271



NL 4429 S

Pg 271



NL 4430 S

Pg 271



NL 4429 R

Pg 271



NL 4430 R

Pg 271

TYPE-C



NL 4431

Pg 273



NL 4432 S

Pg 273



NL 4433 S

Pg 273



NL 4432 R

Pg 273



NL 4433 R

Pg 273

Street Light-
MODERN TYPE
DRUMS - R & S



NL 4435 Pg 274-276



NL 4436 Pg 276



NL 4437 Pg 277




NL 4438 Pg 277

Bollards & Poles
Light- VERTILUX



NL 4435 Pg 278-286

FACADE
Lighting System



NL 4435 Pg 287-290



FLD-S1 Pg 290



FLD-S2 Pg 290



FLD-R1 Pg 291



FLD-R2 Pg 291

STREET
Lighting System



NL 4477 Pg 292-294



NL 4478 Pg 294




NL 4479 Pg 294




NL 4480 Pg 294

POLES

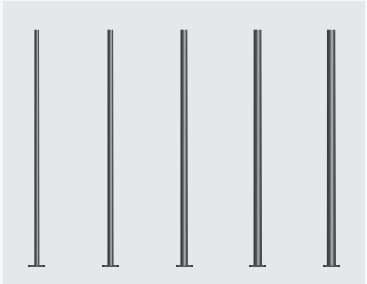

D:60MM
D:76MM
D:89MM
D:100MM
D:114MM Pg 295

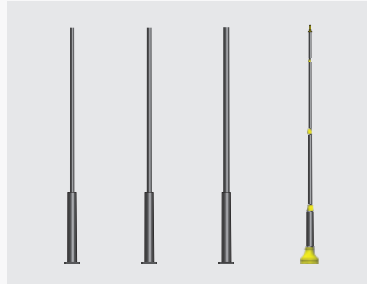

D:60x114MM
D:76x114MM
D:89x114MM
D:60D76D114MM Pg 296

* The beauty of **Nirvana Light** lies in its authentic presence. While we aim for true-to-life representation, please expect that actual product colors and dimensions may vary slightly from what you see in our catalog or online.



Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life



Celestia Deep Recessed Anti-glare Chrome Series

Celestia

Deep Recessed

Anti-glare Chrome Series



Fix Beam

Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications
- The die-cast aluminum housing ensures efficient heat dissipation.
- Delivering exceptional brightness, these lights provide ample illumination for indoor applications.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.

Applications

- Highend Residential
- Hotel
- Villas
- Clubs
- Lobbies & Foyers
- Hospitality Industry
- Retail Sector
- Corporate Office



NL 1544



Specification			
Model	NL 1542	NL 1543	NL 1544
Power (W)	10W	12W	15W
Color Temperature (CCT)	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW
Optics	Reflector	Reflector	Reflector
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Beam Angle	38°	38°	38°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 65mm H : 61mm C : 55mm	D : 75mm H : 70mm C : 65mm	D : 85mm H : 80mm C : 75mm



Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life



Tilto

Deep Recessed Anti-Glare Chrome
Series

Tilto

Anti-glare Chrome Series


Features

Changing one’s mind is natural. The project of a modular and multiform lighting can’t do without Tilto- Anti-Glare Chrome Ceiling Recessed spot light.

- Aluminium die cast housing.
- Deep recessed spot light with Silver chrome secondary reflector.
- Low cut off angle and reduced glare.
- Wide range of wattage & CCT.
- Tunable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.

Applications

- Residential Spaces
- Hotel
- Villas
- Clubs
- Lobbies & Foyers
- Hospitality Industry
- Retail Sector
- Semi-Outdoor Areas

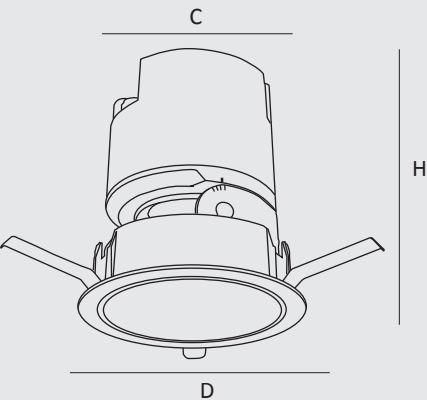

Fixed Optics



NL 1522 FX




Specification	Fixed Optics		
Model	NL 1521 FX	NL 1522 FX	NL 1523 FX
Power (W)	6W	13W	15W/20W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Reflector	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP54	IP54	IP54
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Beam Angle	24°/36°	24°/36°	18°/24°/36°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 65mm H : 80mm C : 60mm	D : 88mm H : 103mm C : 80mm	D : 110mm H : 122mm C : 100mm

Tilto

Anti-glare Chrome Series

NIRVANALIGHT®
Enlighten Your Life



Adjustable Optics



NL 1523 ADJ



Wall washer Optics




NL 1521 WW

Specification	Adjustable Optics		
Model	NL 1521 ADJ	NL 1522 ADJ	NL 1523 ADJ
Power (W)	6W	13W	15W/20W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Reflector	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP54	IP54	IP54
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Beam Angle	24°/36°	24°/36°	18°/24°/36°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 65mm H : 84mm C : 60mm	D : 88mm H : 109mm C : 80mm	D : 110mm H : 130mm C : 100mm

Specification	Wall washer Optics		
Model	NL 1521 WW	NL 1522 WW	NL 1523 WW
Power (W)	6W	13W	15W/20W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Reflector	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP54	IP54	IP54
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Beam Angle	Asymmetric	Asymmetric	Asymmetric
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 65mm H : 80mm C : 60mm	D : 88mm H : 103mm C : 80mm	D : 110mm H : 122mm C : 100mm

Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

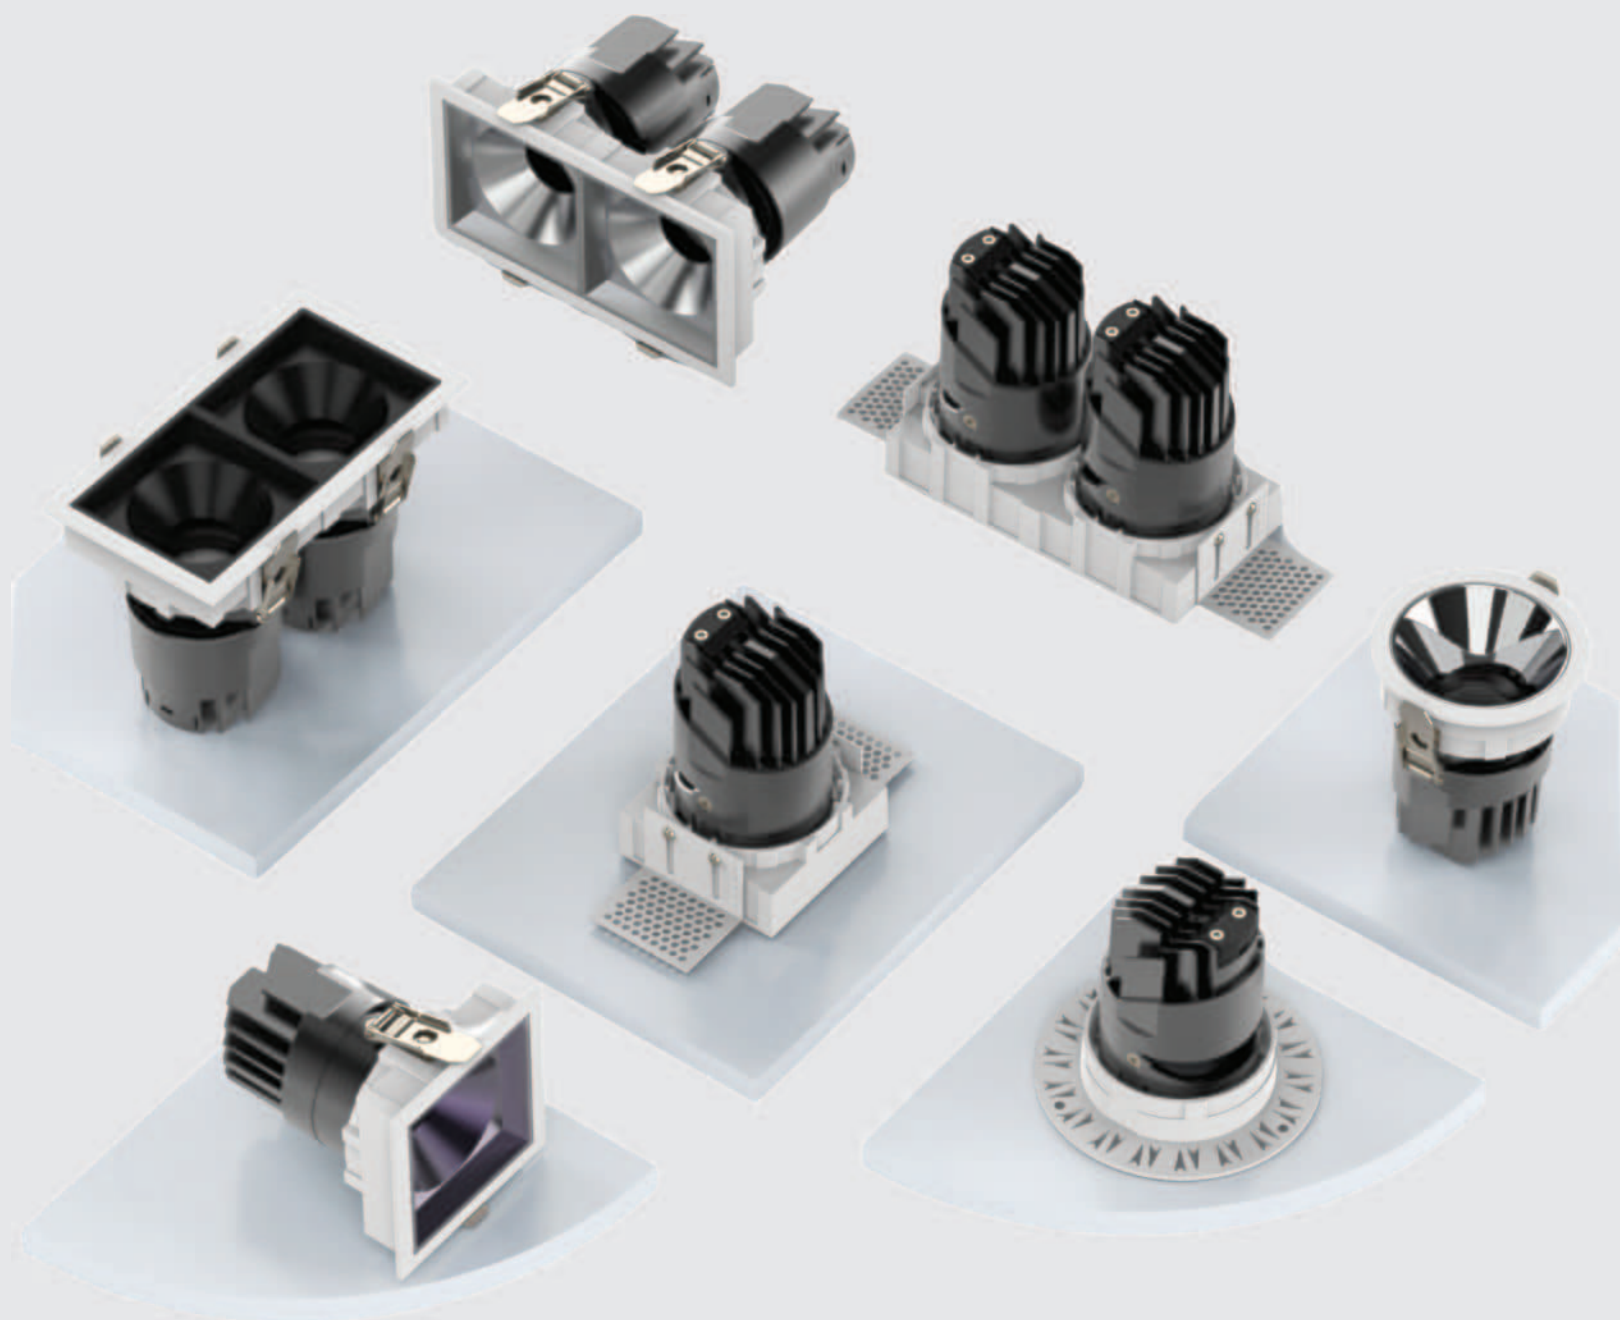

Tirth

Detachable Chrome
Series

Tirth


Detachable Chrome Series

Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications
- The die-cast aluminum housing ensures efficient heat dissipation.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.
- Tunable white option available over RF or Bluetooth.

Applications

- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels




Adjustable Optics



NL 1381




NL 1381-TL



Specification						
Model	NL 1381	NL 1382	NL 1383	NL 1381-TL	NL 1382-TL	NL 1383-TL
Power (W)	6W	12W	24W	6W	12W	24W
Color Temperature (CCT)	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW
Optics	Lens	Lens	Lens	Lens	Lens	Lens
Housing	Aluminum Die Cast					
Finish	White	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT					
Beam Angle	15° , 24° , 36° , 55°					
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 65mm H : 78mm C : 55mm	D : 85mm H : 96mm C : 75mm	D : 105mm H : 121mm C : 95mm	D : 88mm H : 78mm C : 55mm	D : 108mm H : 96mm C : 75mm	D : 128mm H : 110mm C : 95mm

Tirth


Detachable Chrome Series



Adjustable Optics



NL 1383

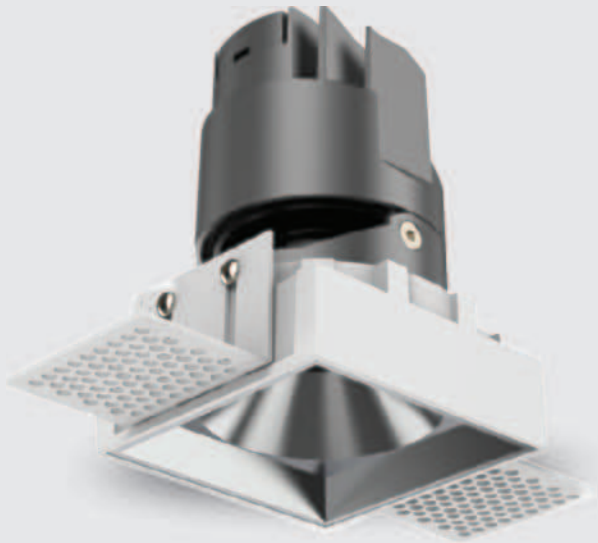


NL 1383-TL



Specification						
Model	NL 1383	NL 1384	NL 1385	NL 1383-TL	NL 1384-TL	NL 1385-TL
Power (W)	7W	12W	24W	7W	12W	24W
Color Temperature (CCT)	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW
Optics	Lens	Lens	Lens	Lens	Lens	Lens
Housing	Aluminum Die Cast					
Finish	White	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT					
Beam Angle	15° , 24° , 36° , 55°					
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 65x65mm H : 85mm C : 58x55mm	D : 85x85mm H : 111mm C : 78x55mm	D : 105x105mm H : 124mm C : 98x95mm	D : 126x53mm H : 85mm C : 58x55mm	D : 146x74mm H : 111mm C : 78x75mm	D : 166x94mm H : 124mm C : 98x95mm

Tirth


Detachable Chrome Series



Adjustable Optics



NL 1386

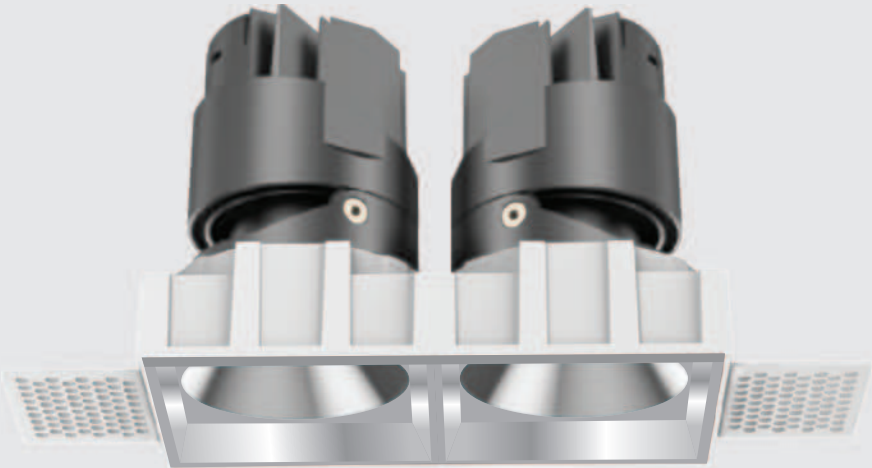

NL 1386-TL



Specification						
Model	NL 1386	NL 1387	NL 1388	NL 1386-TL	NL 1387-TL	NL 1388-TL
Power (W)	2x6W	2x12W	2x24W	2x7W	2x12W	2x24W
Color Temperature (CCT)	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW
Optics	Lens	Lens	Lens	Lens	Lens	Lens
Housing	Aluminum Die Cast					
Finish	White	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT					
Beam Angle	15° , 24° , 36° , 55°					
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 115x65mm H : 85mm C : 105x58mm	D : 155x85mm H : 111mm C : 148x78mm	D : 195x105mm H : 124mm C : 185x98mm	D : 177x103mm H : 85mm C : 105x58mm	D : 217x145mm H : 111mm C : 145x78mm	D : 257x185mm H : 124mm C : 185x98mm

Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life


Tejas

Detachable Anti-Glare Chrome
Series



Tejas

Detachable Anti-glare Chrome Series



Adjustable Optics

Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications
- The die-cast aluminum housing ensures efficient heat dissipation.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.
- Tunable white option available over RF or Bluetooth.

Applications

- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels



NL 1389




NL 1389-TL



Specification				
Model	NL 1389	NL 1390	NL 1389-TL	NL 1390-TL
Power (W)	6W	12W	6W	12W
Color Temperature (CCT)	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW
Optics	Lens	Lens	Lens	Lens
Housing	Aluminum Die Cast			
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Beam Angle	15° , 24° , 36° , 55°			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 65mm H : 75mm C : 55mm	D : 82mm H : 81mm C : 75mm	D : 88mm H : 75mm C : 55mm	D : 108mm H : 81mm C : 75mm

Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

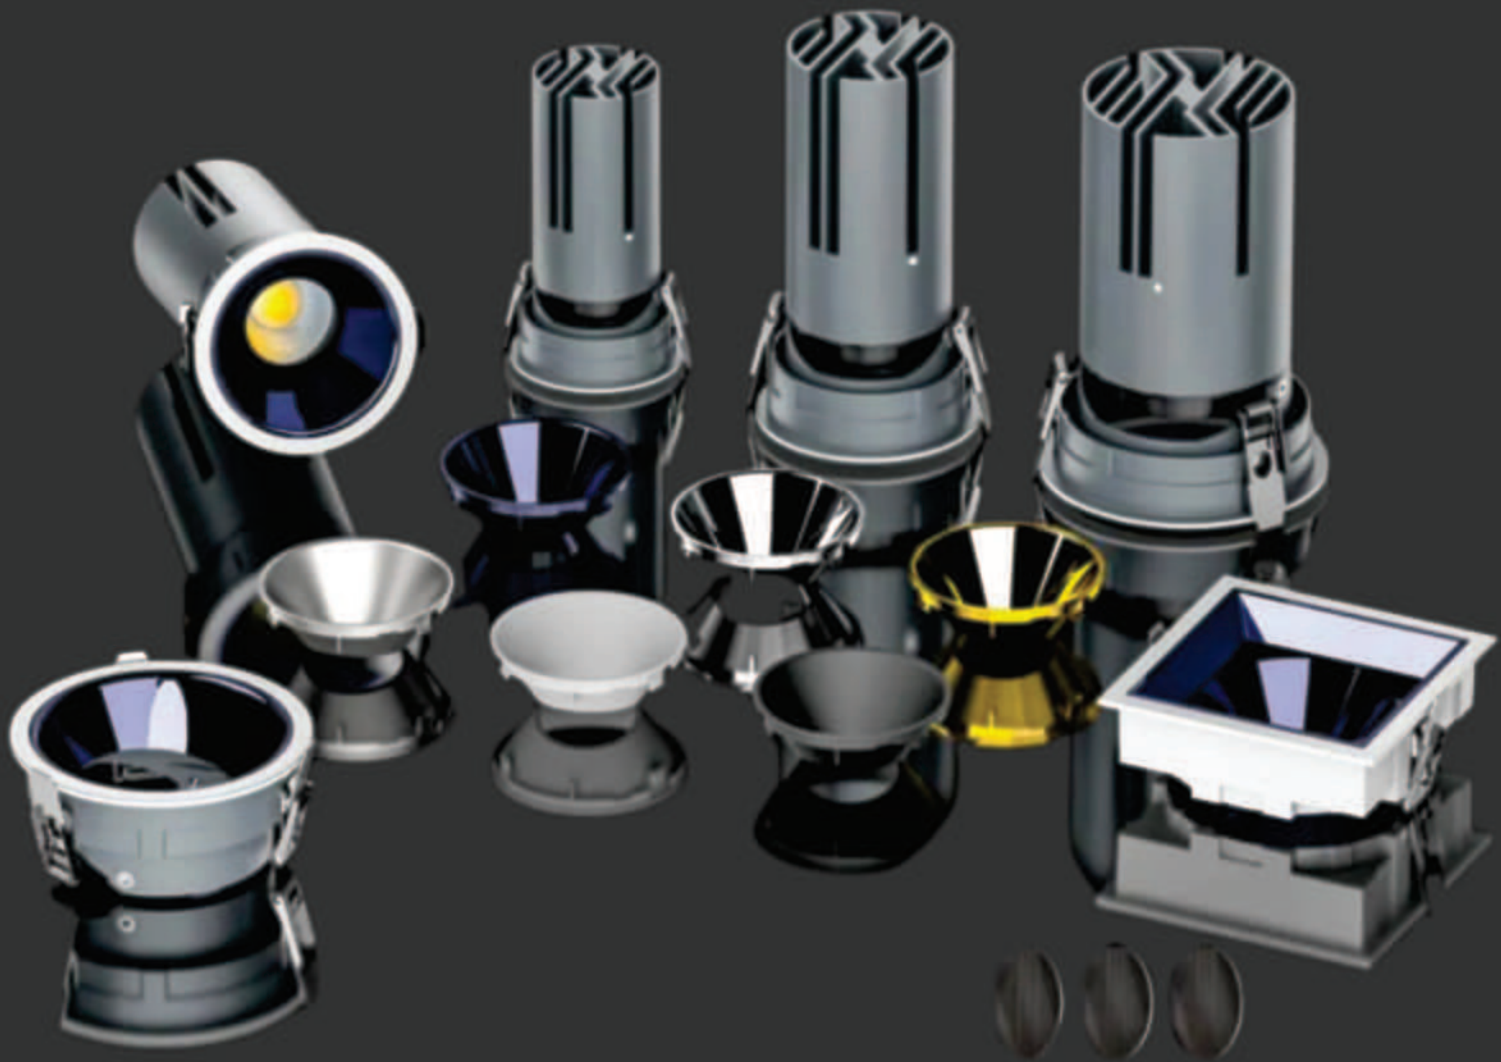

Trishul

Detachable Anti-glare Chrome Series

Trishul


Detachable Anti-glare Chrome Series

Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications
- The die-cast aluminum housing ensures efficient heat dissipation.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.
- Tunable white option available over RF or Bluetooth.

Applications

- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels



Adjustable Optics



NL 1362




NL 1362-TL



Specification				
Model	NL 1362	NL 1363	NL 1362-TL	NL 1363-TL
Power (W)	13W	22W	13W	22W
Color Temperature (CCT)	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW
Optics	Lens	Lens	Lens	Lens
Housing	Aluminum Die Cast			
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Beam Angle	15° , 24° , 36° , 55°			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 65mm H : 112mm C : 55mm	D : 85mm H : 148mm C : 75mm	D : 88mm H : 112mm C : 55mm	D : 108mm H : 148mm C : 75mm

Trishul

Detachable Anti-glare Chrome Series




Adjustable Optics



NL 1365




NL 1365-TL



Specification				
Model	NL 1365	NL 1366	NL 1365-TL	NL 1366-TL
Power (W)	13W	22W	13W	22W
Color Temperature (CCT)	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW
Optics	Lens	Lens	Lens	Lens
Housing	Aluminum Die Cast			
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Beam Angle	15° , 24° , 36° , 55°			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 65x65mm H : 120mm C : 55x55mm	D : 85x85mm H : 157mm C : 75x75mm	D : 124x54mm H : 120mm C : 55x55mm	D : 145x74mm H : 157mm C : 75x75mm

Trishul


Detachable Anti-glare Chrome Series



Adjustable Optics



NL 1368

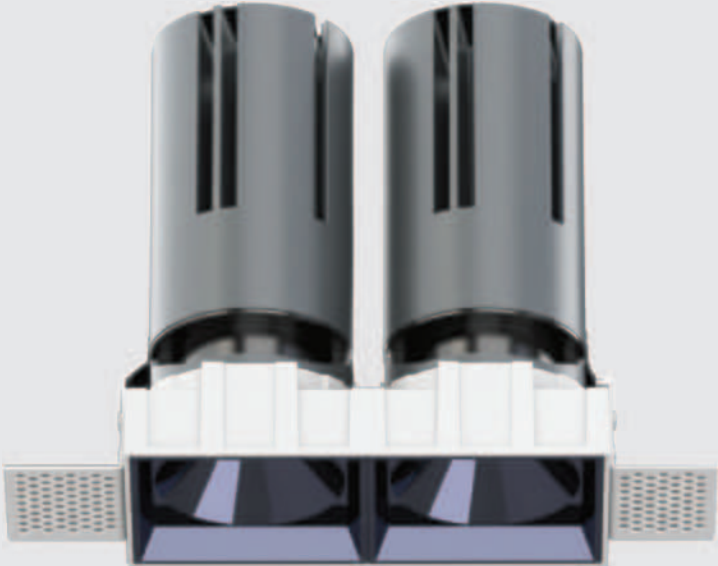


NL 1368-TL



Specification				
Model	NL 1368	NL 1369	NL 1368-TL	NL 1369-TL
Power (W)	2x13W	2x22W	2x13W	2x22W
Color Temperature (CCT)	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW
Optics	Lens	Lens	Lens	Lens
Housing	Aluminum Die Cast			
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Beam Angle	15° , 24° , 36° , 55°			
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 115x65mm H : 120mm C : 105x55mm	D : 155x85mm H : 157mm C : 145x75mm	D : 176x54mm H : 120mm C : 105x55mm	D : 216x47mm H : 157mm C : 145x75mm

Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

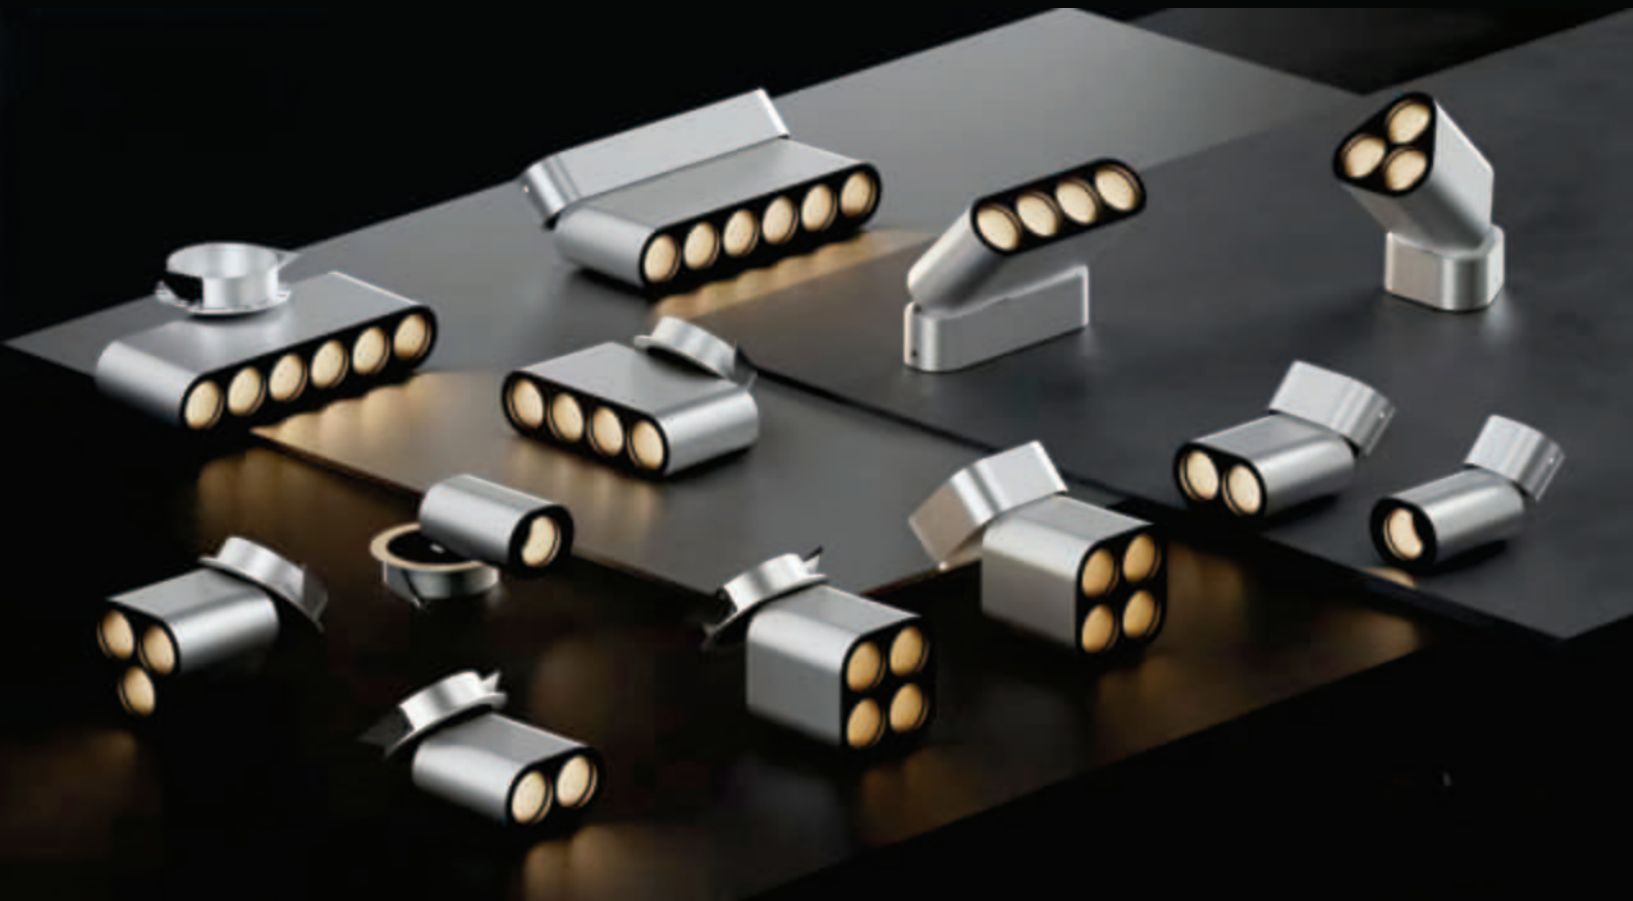


Saurya

Adjustable
Anti-glare Series

Saurya

Adjustable Surface Anti-glare Series



Adjustable Optics

Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications
- The die-cast aluminum housing ensures efficient heat dissipation.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.
- Tunable white option available over RF or Bluetooth.

Applications

- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels




NL 1661



NL 1662




NL 1663

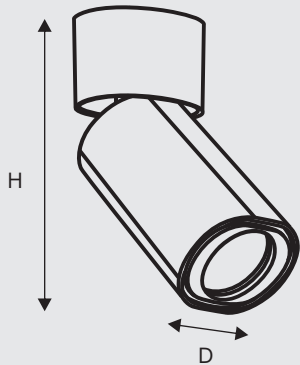


Specification			
Model	NL 1661	NL 1662	NL 1663
Power (W)	6W	2x6W	3x6W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Optics	Lens	Lens	Lens
Housing	Aluminum Die Cast		
Finish	Matte Black	Matte Black	Matte Black
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	Non- Dimmable		
Beam Angle	36°	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 47x37mm H : 117mm	D : 67x37mm H : 117mm	D : 67x63mm H : 117mm

Saurya


Adjustable Surface Anti-glare Series




Adjustable Optics

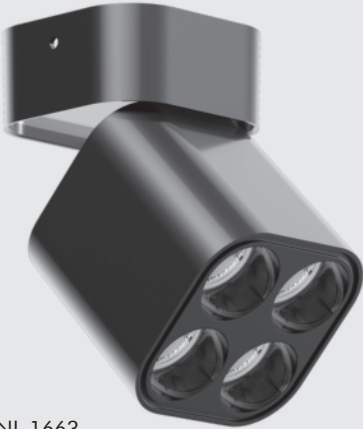


NL 1663

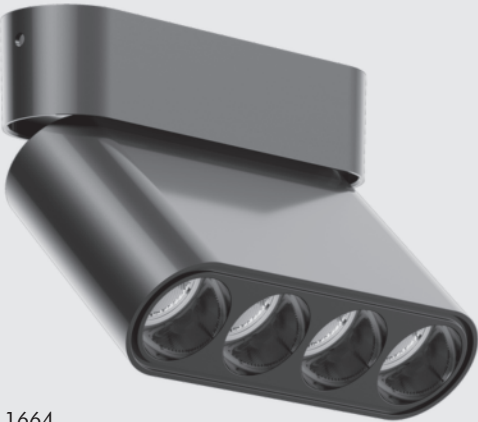

NL 1664

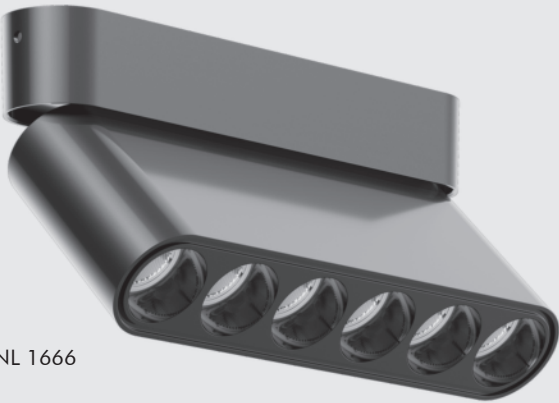

NL 1666



Specification

Model	NL 1664	NL 1665	NL 1666
Power (W)	4x6W	4x6W	6x6W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Optics	Lens	Lens	Lens
Housing	Aluminum Die Cast		
Finish	Matte Black	Matte Black	Matte Black
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	Non- Dimmable		
Beam Angle	36°	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 67x67mm H : 117mm	D : 127x37mm H : 117mm	D : 187x37mm H : 117mm

Saurya


Adjustable Recessed Anti-glare Series

Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications
- The die-cast aluminum housing ensures efficient heat dissipation.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.
- Tunable white option available over RF or Bluetooth.

Applications

- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels




Adjustable Optics



NL 1667



NL 1668

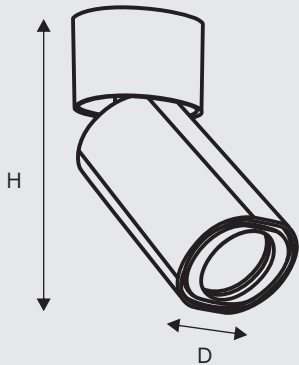


NL 1669



Specification			
Model	NL 1667	NL 1668	NL 1669
Power (W)	6W	2x6W	3x6W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Optics	Lens	Lens	Lens
Housing	Aluminum Die Cast		
Finish	Matte Black	Matte Black	Matte Black
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	Non- Dimmable		
Beam Angle	36°	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 47x39mm H : 92mm	D : 67x37mm H : 92mm	D : 67x63mm H : 100mm

Saurya

Adjustable Recessed Anti-glare Series



Adjustable Optics



NL 1670



NL 1671



NL 1672



Specification			
Model	NL 1670	NL 1671	NL 1672
Power (W)	4x6W	4x6W	6x6W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Optics	Lens	Lens	Lens
Housing	Aluminum Die Cast		
Finish	Matte Black	Matte Black	Matte Black
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	Non- Dimmable		
Beam Angle	36°	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 67x67mm H : 100mm	D : 127x37mm H : 100mm	D : 187x37mm H : 100mm

Indoor Architectural Lighting


NIRVANALIGHT®
Enlighten Your Life



Logus Detachable Anti-glare Series

Logus

Detachable Anti-glare Series



Adjustable Optics

Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications
- The die-cast aluminum housing ensures efficient heat dissipation.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.
- Tunable white option available over RF or Bluetooth.

Applications

- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels



NL 1371




NL 1371-TL



Specification						
Model	NL 1371	NL 1372	NL 1373	NL 1371-TL	NL 1372-TL	NL 1373-TL
Power (W)	6W	11W	15W	6W	11W	15W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K	3K/4K/6K	3K/4K/6K	3K/4K/6K
Optics	Lens	Lens	Lens	Lens	Lens	Lens
Housing	Aluminum Die Cast			Aluminum Die Cast		
Finish	White	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20	IP20
Dimming	Non- Dimmable					
Beam Angle	36°	36°	36°	36°	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 43mm H : 82mm C : 35mm	D : 53mm H : 106mm C : 45mm	D : 63mm H : 112mm C : 55mm	D : 60mm H : 82mm C : 35mm	D : 70mm H : 106mm C : 45mm	D : 80mm H : 112mm C : 55mm

Logus

Detachable Anti-glare Series



Adjustable Optics

Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications
- The die-cast aluminum housing ensures efficient heat dissipation.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.
- Tunable white option available over RF or Bluetooth.

Applications

- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels




NL 1374



Specification			
Model	NL 1374	NL 1375	NL 1376
Power (W)	6W	11W	15W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Optics	Lens	Lens	Lens
Housing	Aluminum Die Cast		
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	Non- Dimmable		
Beam Angle	36°	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 39mm H : 74mm C : 30mm	D : 49mm H : 89mm C : 40mm	D : 59mm H : 93mm C : 50mm

Accessories

Available in 8 Reflector,
Honeycomb,
Ellipses and pin hole
Options for the Products,
Tirth, Tejas, Trishul, Saurya & Logus



Honeycomb



Ellipses Ring



Pin Hole



Matt White




Chrome



Matt Black



Gun Black



Gold




Fog Silver



Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

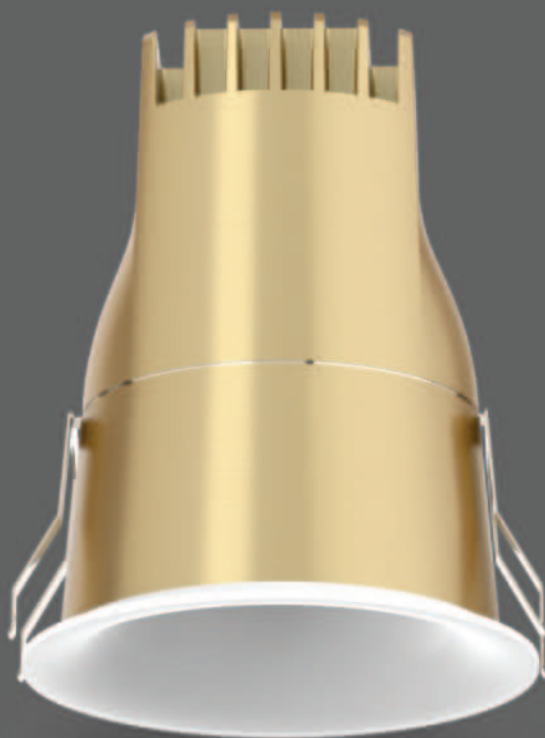


Nube Deep Recessed Fixed Anti-glare Series

Nube

Deep Recessed Fixed

Anti-glare Series



Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications
- The die-cast aluminum housing ensures efficient heat dissipation.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.
- Tunable white option available over RF or Bluetooth.

Applications

- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels




NL 1603



Specification			
Model	NL 1601	NL 1602	NL 1603
Power (W)	8W	11W	15W
Color Temperature (CCT)	3K/4K/6K/TW	3K/4K/6K/TW	3K/4K/6K/TW
Optics	Lens	Lens	Lens
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP44	IP44	IP44
Dimming	Non-Dimmable	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT	
Beam Angle	55°	55°	55°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 43mm H : 76mm C : 36mm	D : 63mm H : 94mm C : 55mm	D : 83mm H : 94mm C : 55mm

Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

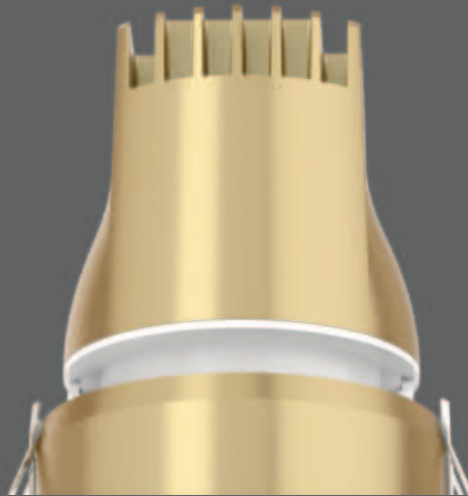

45°
Shielding Angle



Ceiling Rotation Ring



30° adjustable angle



The embedded parts
are adjustable in height




Safe Ceiling attachment

Nube Deep Recessed Adjustable Anti-glare Series

Nube

Deep Recessed Adjustable

Anti-glare Series




Adjustable Beam

Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications
- The die-cast aluminum housing ensures efficient heat dissipation.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.
- Tunable white option available over RF or Bluetooth.

Applications

- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels



NL 1606



NL 1607(Adjustable)



Specification		
Model	NL 1606	NL 1607
Power (W)	11W	13W/15W
Color Temperature (CCT)	3K/4K/6K/TW	3K/4K/6K/TW
Optics	Lens	Lens
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP44	IP44
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT	
Beam Angle	55°	55°
Life Span (hours)	50,000 Hrs	50,000 Hrs
Dimension	D : 63mm H : 94mm C : 55mm	D : 83mm H : 91mm C : 55mm



Indoor Architectural Lighting



Anodized Black




Anodized Dark Grey

Cirrus Deep Recessed Series

Cirrus

Deep Recessed Series



Fix Beam

Features

- Our Recessed LED ceiling light range offers a sleek and modern solution for various indoor lighting applications.
- The die-cast aluminum housing ensures efficient heat dissipation.
- Delivering exceptional brightness, these lights provide ample illumination.
- Designed to be energy-efficient, consuming less power while delivering high-quality illumination.
- Tunable white option available over RF or Bluetooth.



Applications

- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels



NL 1561



NL 1562



NL 1563



NL 1564



Specification				
Model	NL 1561	NL 1562	NL 1563	NL 1564
Power (W)	5W	10W	12W	18W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K/TW	3K/4K/6K/TW
Optics	Lens	Lens	Lens	Lens
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	Non-Dimmable	Non-Dimmable	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT	
Beam Angle	36°	36°	50°	50°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 30mm H : 86mm C : 25mm	D : 35mm H : 91mm C : 31mm	D : 52mm H : 73mm C : 48mm	D : 62mm H : 90mm C : 58mm




Indoor Architectural Lighting


NIRVANALIGHT®
Enlighten Your Life



Flicker Free



Excellent Heat Dissipation



Reflective Cup

Bullet Wall Washer Trimless

Bullet

Trimless Series

Features

Location, space and wall are the logical delimitation of the environment in which ideas move to give consistency, concreteness and originally to a lighting designers sparks.

- Aluminium die cast housing.
- Trimless version of spot light.
- Fixed Wall Washer Light



Wall washer
Optics



Applications


- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



NL 1525 WW



NL 1525 WW-TL
(Trimless)



Specification		
Model	NL 1525 WW	NL 1525 WW-TL
Power (W)	5W	5W
Color Temperature (CCT)	3000K/4000K	3000K/4000K
Optics	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast
Finish	Silver body+White Buffle	Silver body+White Buffle
Color Rendering Index (CRI)	>90	>90
Protection Rating (IP)	IP20	IP20
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Dimension	D : 35mm H : 70mm C : 45mm	D : 35mm H : 70mm C : 64.5mm



Indoor Architectural Lighting


NIRVANALIGHT®
Enlighten Your Life



Alina Fix Down Series

Alina

Fixed Down Slim Trim Deep Recessed Series



Features

An invisible touch for a functional minimalism that aims to full and undisturbed fruition of light.

- Slim trim offers feel of minimalistic design.
- Deep recessed to avoid direct glare.
- Simple and neat design.
- Beam options like Narrow, Medium, Wide available on request.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.



NL 0132



NL 0133



NL 0134




NL 0135



NL 0136



Dual Tone Color Option Available In:
Black, Grey, Gold & Copper



Specification					
Model	NL 0132	NL 0133	NL 0134	NL 0135	NL 0136
Power (W)	3W/5W	9W	11W	11W/13W/15W	13W/15W/18W/20W
Color Temperature (CCT)	3K, 4K, 6K	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Reflector	Reflector	Reflector	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20
Dimming	Non-Dimmable	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Beam Angle	24°,36°	20°,40°,60°	38°	15°,24°,38° 60°	20°,30°,40° 60°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 35mm H : 62mm C : 28mm	D : 60mm H : 70mm C : 52mm	D : 75mm H : 80mm C : 69mm	D : 78mm H : 86mm C : 72mm	D : 92mm H : 87mm C : 83mm

Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life



Fisa

Fixed Down
Lense Optics Series

Fissa

Fixed Down

Lense Optics Series


Features

Fissa - Deep recessed led ceiling mounted fixed down lights are perfect for uniform and glare-free lighting. The die cast aluminium housing is ideal for better thermal management.


- Slim trim offers feel of minimalistic design.
- Deep recessed to avoid direct glare.
- Simple and neat design.
- Beam options like Narrow, Medium, Wide available on request.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries

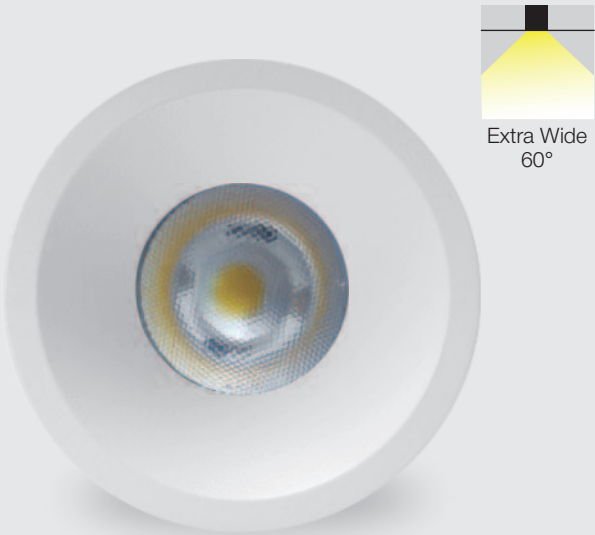

Extra Wide Lens For Better Uniformity

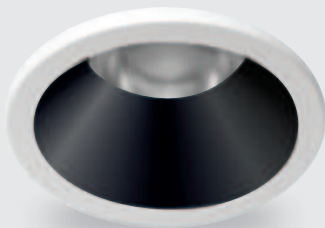

Dual Tone Color Option Available In:
Black, Grey, Gold & Copper



NL 1037L



NL 1031



NL 0135L



Specification

Model	NL 1037L	NL 1031	NL 0135L
Power (W)	11W/13W/15W	11W/13W/15W	11W/13W/15W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
optics	Lens	Lens	Lens
Housing	Aluminium Die cast	Aluminium Die cast	Aluminium Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Beam Angle	60°	60°	60°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 80mm H : 80mm C : 70mm	D : 82mm H : 70mm C : 70mm	D : 78mm H : 86mm C : 72mm



Indoor Architectural Lighting


NIRVANALIGHT®
Enlighten Your Life



SILVER CHROME




BLACK CHROME



TRUE COPPER



OLIVE GREEN



Metallica Series

Metallica

Series-Fixed


Features

Metallica is a family of recessed down light with a touch of metallic finish. Available in two trims of 60mm & 78mm, this versatile product offers features like no other series. Luminaire can be perfectly optimized to meet the lighting requirement.

- Aluminium die cast housing.
- Available in 4 Metallic finish like True Copper, Olive Green, Dark Chrome, Silver Chrome.
- Fixed deep recessed spot light.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Fix Beam



NL 0141




NL 0142



NL 0137



NL 0138



Specification

Model	NL 0141	NL 0142	NL 0137	NL 0138
Power (W)	3W/5W	7W	9W/11W	13W / 15W
Color Temperature (CCT)	3K, 4K, 6K,	3K, 4K, 6K	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Reflector	Reflector	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Ring Finish	White/Black	White/Black	White/Black	White/Black
Reflector (Options)	Black Chrome	Black Chrome	Silver Chrome/Black Chrome True Copper / Olive Green	Silver Chrome/Black Chrome True Copper / Olive Green
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	Non-Dimmable	Non-Dimmable	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT	
Beam Angle	24°	24°	60°	32°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 38mm H : 65mm C : 33mm	D : 50mm H : 80mm C : 43mm	D : 60mm H : 84mm C : 52mm	D : 78mm H : 86mm C : 72mm

Metallica

Series - Adjustable


Features

Metallica is a family of recessed down light with a touch of metallic finish. Available in two trims of 60mm & 78mm, this versatile product offers features like no other series. Luminaire can be perfectly optimized to meet the lighting requirement.

- Aluminium die cast housing.
- Available in 4 Metallic finish like True Copper, Olive Green, Dark Chrome, Silver Chrome.
- Fixed deep recessed spot light.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries





Adjustable Optics



NL 0137 ADJ



NL 0138 ADJ

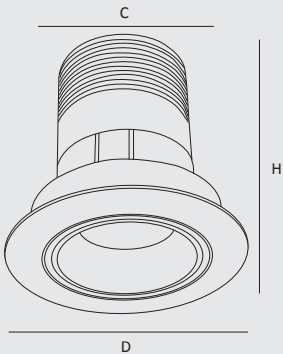

Specification		
Model	NL 0137ADJ	NL 0138ADJ
Power (W)	9W/11W	13W / 15W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast
Finish	White	White
Reflector (Options)	Silver Chrome/Black Chrome True Copper / Olive Green	Silver Chrome/Black Chrome True Copper / Olive Green
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT	
Beam Angle	60°	32°
Life Span (hours)	50,000 Hrs	50,000 Hrs
Dimension	D : 80mm H : 68mm C : 82mm	D : 97mm H : 85mm C : 87mm



Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life



Soothe

Anti-glare Black Series


Soothe

Anti-glare Black Series

Features

Soothe Anti-Glare black Ceiling Recessed fixed & adjustable lights are perfect for directional low glare application. The black surface of the fixture adds to aesthetic and reduces glare.

- Aluminium die cast housing.
- Ideal to create dark light environment.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated by handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.



Adjustable Optics

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries




NL 1181



NL 1182



NL 1183



Specification			
Model	NL 1181	NL 1182	NL 1183
Power (W)	8W	12W	20W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Reflector	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Beam Angle	60°	60°	60°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 84mm H : 77mm C : 74mm	D : 108mm H : 95mm C : 86mm	D : 115mm H : 130mm C : 105mm




Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life




D-Signo-Adjustable Series

D-Signo Adjustable Series



Adjustable Optics

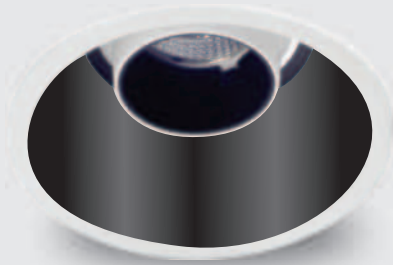

3° Super Narrow Spot



NL 1107

Dual Tone Color Option Available In:
Black, Grey, Gold & Copper

Recessed
With Snoot

Recessed
Without Snoot

Trimless
With Snoot

Trimless
Without Snoot



NL 1446



NL 1446A



NL 1456



NL 1456A

Specification

Model	NL 1107	NL 1446	NL 1446A	NL 1456	NL 1456A
Power (W)	3W	13W	13W	12W	12W
Color Temperature (CCT)	3K	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K,TW	3K, 4K, 6K, TW
Optics	Reflector	Reflector	Reflector	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT				
Beam Angle	3°	60°	60°	60°	60°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 65mm H : 35mm C : 55mm	D : 90mm H : 125mm C : 83mm	D : 90mm H : 125mm C : 83mm	D : 85mm H : 120mm C : 114mm	D : 85mm H : 120mm C : 114mm

D-Signo Adjustable Series


Features

D-Signo Adjustable Spot Lights are ceiling recessed down lights having option of adjusting direction of the light source wherever needed.

- Aluminium die cast housing.
- Adjustable in all directions, Max tilting 30°, rotation – 360°.
- Deep recessed to avoid glare.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Adjustable Optics



With Snoot

Without Snoot



NL 1445



NL 1445A



NL 1444



NL 1447

Specification				
Model	NL 1445	NL 1445A	NL 1444	NL 1447
Power (W)	13W	13W	12W	10W
Color Temperature (CCT)	3K, 4K, 6K/TW	3K, 4K, 6K/TW	3K, 4K, 6K	3K, 4K, 6K, TW
Optics	Reflector	Reflector	Lens	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminium Die cast	Aluminum Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Beam Angle	60°	60°	25°	60°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 93x93mm H : 125mm C : 87x87mm	D : 93x93mm H : 125mm C : 87x87mm	D : 93x93mm H : 82mm C : 87x87mm	D : 90mm H : 51mm C : 83mm

D-Signo Adjustable Series


Features

D-Signo Adjustable Spot Lights are ceiling recessed down lights having option of adjusting direction of the light source wherever needed.


- Aluminium die cast housing.
- Adjustable in all directions, Max tilting 30°, rotation – 360°.
- Deep recessed to avoid glare.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries

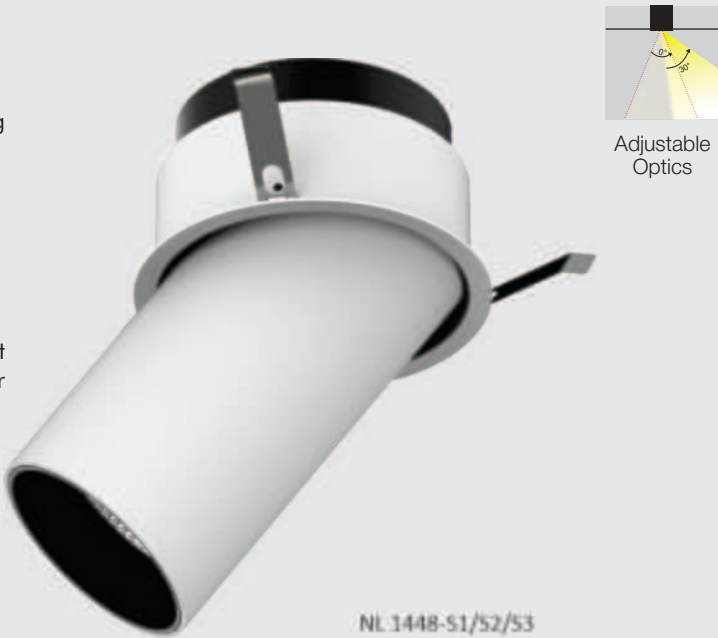

Specification			
Model	NL 1448-S1	NL 1448-S2	NL 1448-S3
Power (W)	8W	11W/13W	15W/20W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
LED Type	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Beam Angle	24°	24°	24°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 76mm C : 55mm H : 38mm	D : 98mm C : 75mm H : 45mm	D : 118mm C : 95mm H : 54mm

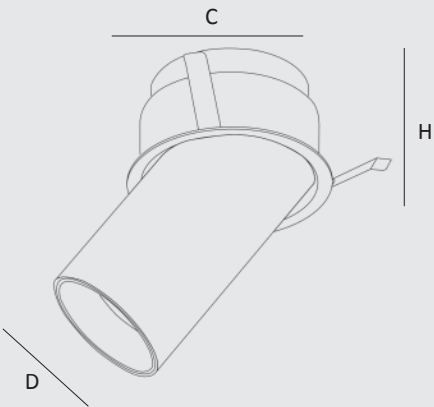

Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life



Move Adjustable Series

Move Adjustable Series




Features

Moove is a family of adjustable downlights which are tiltable as well as rotatable. The luminaire design is such that it can reach maximum horizontal plane or vertical surfaces.

- Aluminium die cast housing.
- Adjustable in all directions, Tilting max 75°, rotation 355°.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries

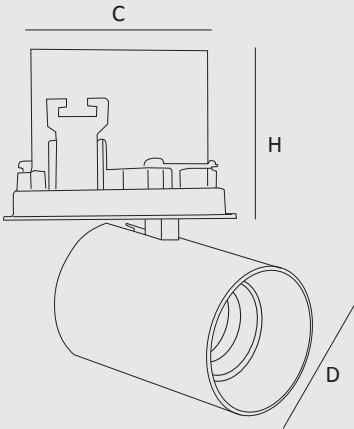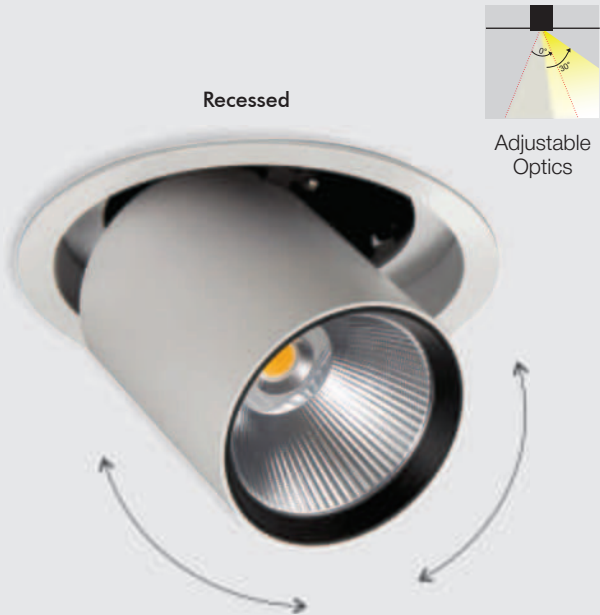


Specification			
Model	NL 1449	NL 1460	NL 1460TL
Power (W)	8W	13W	13W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Reflector	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/	Phase-cut/DALI/TWRF/TWBT	
Beam Angle	24°	24°	24°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 84mm H : 90mm C : 75mm	D : 100mm H : 105mm C : 89mm	D : 88mm H : 93mm C : 127mm



Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

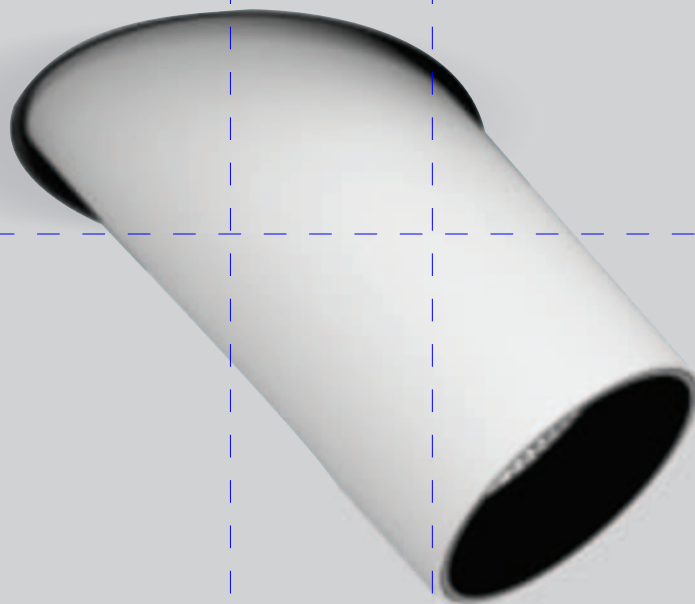


Hido Series


Fixed & Adjustable - Trimless
Series

Hido Series

Fixed & Adjustable - Trimless Series



Adjustable Optics

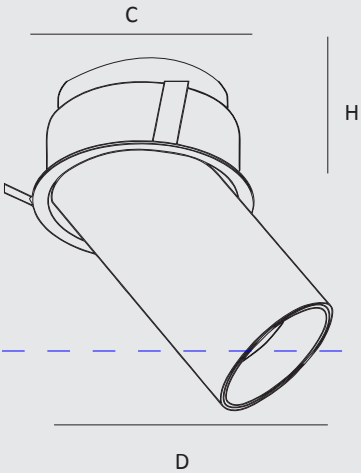


NL 1448-TL

Specification

Model	NL 1448-S1 TL	NL 1448-S2 TL	NL 1448-S3 TL
Power (W)	8W	11W/13W	15W/20W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Reflector	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Beam Angle	24°		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 76mm H : 38mm C : 55mm	D : 98mm H : 45mm C : 75mm	D : 118mm H : 54mm C : 95mm

Hido Series

Fixed & Adjustable - Trimless Series



Adjustable Optics

Features

Location, space and wall are the logical delimitation of the environment in which ideas move to give consistency, concreteness and originally to a lighting designers sparks.

- Aluminium die cast housing.
- Trimless version of spot light.
- Fix and adjustable deep recessed spot.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.




Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Trimless
With Snoot



NL 1456


Trimless
Without Snoot



NL 1456A



NL 1457



NL 1460TL

Specification				
Model	NL 1456	NL 1456A	NL 1457	NL 1460TL
Power (W)	12W	12W	10W	13W
Color Temperature (CCT)	3K, 4K, 6K,TW	3K, 4K, 6K, TW	3K, 4K, 6K,TW	3K, 4K, 6K, TW
Optics	Reflector	Reflector	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Beam Angle	60°	60°	60°	60°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 85mm H : 120mm C : 114mm	D : 85mm H : 120mm C : 114mm	D : 85mm H : 100mm C : 114mm	D : 88mm H : 93mm C : 127mm



Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life



Aqua
IP Series

Aqua

IP Series

Features

Aqua is a family of luminaire for wet area applications like washroom, bathroom, steam room, spa, external parapet of the building or any high humid wet aarea application.

- Aluminium die cast housing.
- Designed to withstand and perform in wet area application.
- Especially designed silicon gasket and lens combination is use to achieve IP54 & IP55 rating after concealing.

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



NL 1130



IP44
RATED

≥ 80 CRI
≥ 90 CRI

Dimming
0-10V/1-10V
DALI/2018

COB LED

2
Years
Warranty

BIS


TUNABLE WHITE
AVAILABLE

Available Finish

Specification	
Model	NL 1130
Power (W)	11W
Color Temperature (CCT)	3K, 4K, 6K, TW
Optics	Reflector
Housing	Aluminum Die cast
Finish	White
Color Rendering Index (CRI)	>80
Protection Rating (IP)	IP44
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT
Beam Angle	38°
Life Span (hours)	50,000 Hrs
Dimension	D : 85mm H : 75mm C : 75mm

Aqua

IP Series



Features

Aqua is a family of luminaire for wet area applications like washroom, bathroom, steam room, spa, external parapet of the building or any high humid wet aarea application.

- Aluminium die cast housing.
- Designed to withstand and perform in wet area application.
- Especially designed silicon gasket and lens combination is use to achieve IP54 & IP55 rating after concealing.

Applications


- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



NL 1170




NL 1171



Specification		
Model	NL 1170	NL 1171
Power (W)	9W,11W, 13W, 15W	20W, 27W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Lens	Lens
Housing	Aluminum Die cast	Aluminum Die cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP54	IP54
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT	
Beam Angle	50°	45°
Life Span (hours)	50,000 Hrs	50,000 Hrs
Dimension	D : 100mm H : 75mm C : 90mm	D : 140mm H : 90mm C : 130mm

Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

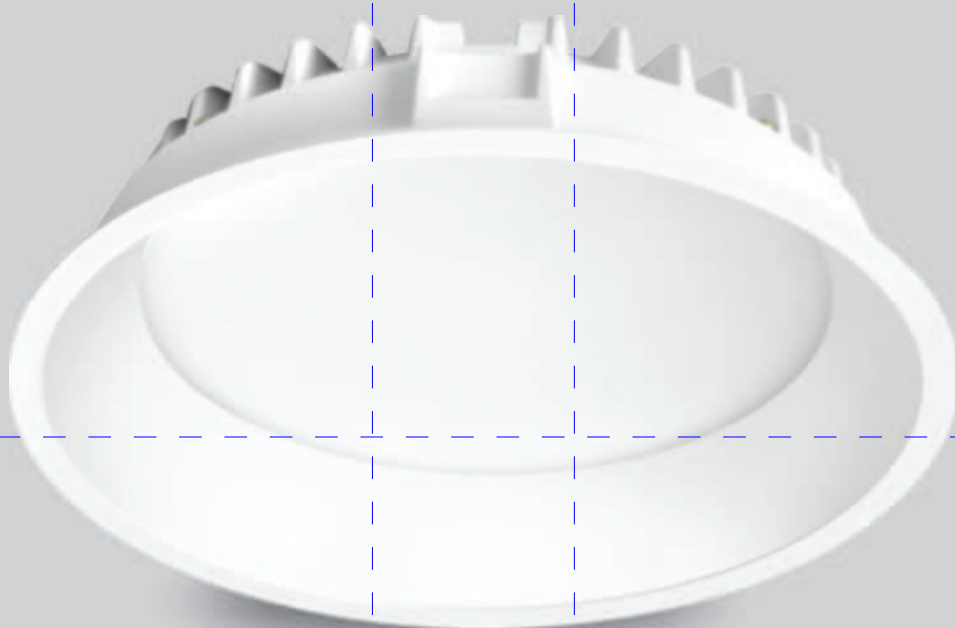

Dazzle

SMD Down Light
Series

Dazzle

SMD Down Lights

Series


Features

Deep Round recessed mounted LED ceiling lights offer a perfect fit for a variety of lighting applications. Experience superior indoor lighting with our LED ceiling recessed back-lit panel light, designed to provide soft and uniform light distribution.

- Aluminium die-cast housing, Superior thermal management for longer-lasting performance.
- The high lumen output and a range of wattage and CCT options Available.
- Perfect for modern interiors, these lights bring both functionality and elegance to your space.

Applications

- Corporate Office
- Retail Sectors
- Commercial & Business Centers
- Hospitals & Airports
- Educational & Residential Premises

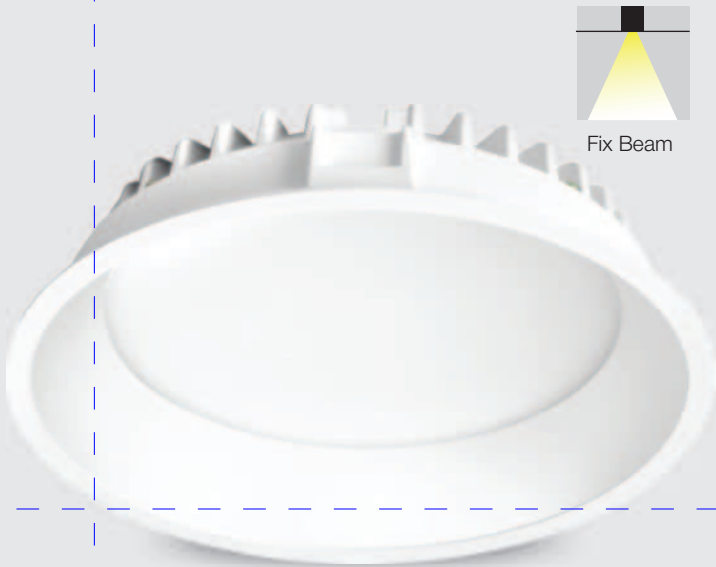

NL 1196



OSRAM EXTRA BRIGHT SMD LED

Specification			
Model	NL 1194	NL 1195	NL 1196
Power (W)	10W/12W	15W/18W	21W/24W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Diffused	Diffused	Diffused
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Beam Angle	100°	100°	100°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 119mm H : 50mm C : 113mm	D : 155mm H : 53mm C : 147mm	D : 175mm H : 56mm C : 167mm

Dazzle

SMD Down Lights

Series


Features

Deep Round recessed mounted LED ceiling lights offer a perfect fit for a variety of lighting applications. Experience superior indoor lighting with our LED ceiling recessed back-lit panel light, designed to provide soft and uniform light distribution.

- Aluminium die-cast housing, Superior thermal management for longer-lasting performance.
- The high lumen output and a range of wattage and CCT options Available.
- Perfect for modern interiors, these lights bring both functionality and elegance to your space.

Applications

- Corporate Office
- Retail Sectors
- Commercial & Business Centers
- Hospitals & Airports
- Educational & Residential Premises



NL 1091/NL 1093



IP20
RATED

≥ 80 CRI
≥ 90 CRI

Dimming
1-10V/0-10V
DALI-2/DTS

SMD LED

2
Years
Warranty

BIS

TUNABLE WHITE
2700K-6500K

Available Finish
Black, White, Grey


OSRAM EXTRA BRIGHT SMD LED

Specification		
Model	NL 1091	NL 1093
Power (W)	12W/15W/18W	20W/24W/27W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Diffused	Diffused
Housing	Aluminum Die cast	Aluminum Die cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT	
Beam Angle	100°	100°
Life Span (hours)	50,000 Hrs	50,000 Hrs
Dimension	D : 155mm H : 55mm C : 129mm	D : 194mm H : 56mm C : 168mm



Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

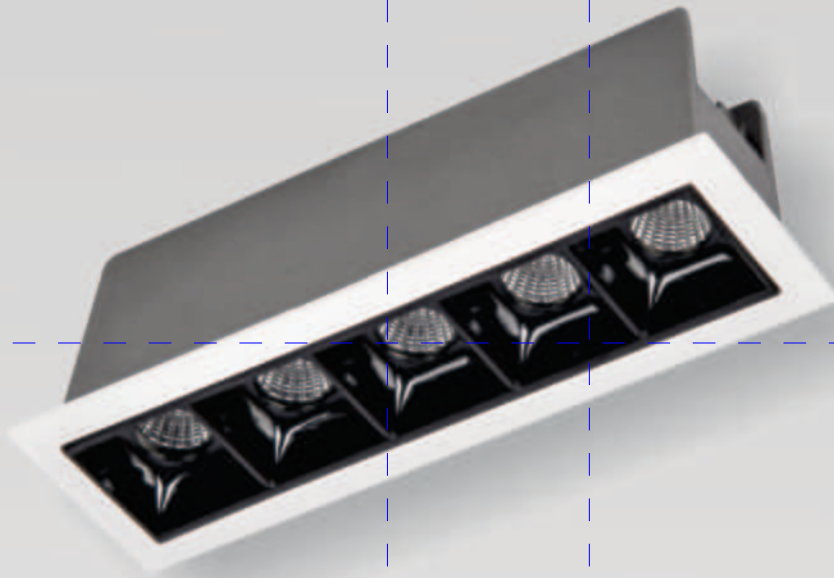

Strike

Lineo - Recessed Spot Light
Series

Strike

Lineo - Recessed Spot Light Series





Features

In the architectural project, that gives light the task of overcoming the narrow boundaries of ordinariness, lighting can be the real surprise.

- Tunable White versions available (2700K ÷ 5700K).
- IOT enabled options available where in one can create different scenes through gadgets like Remote, Mobiles, Tablet, Laptops etc.
- Main body with radiant surface made of die-cast aluminium.
- Special body color combination like White, Black, Dark gray.

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries

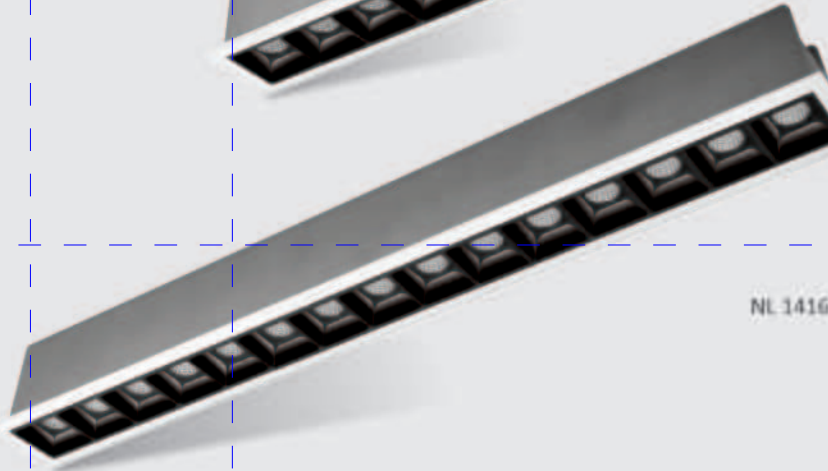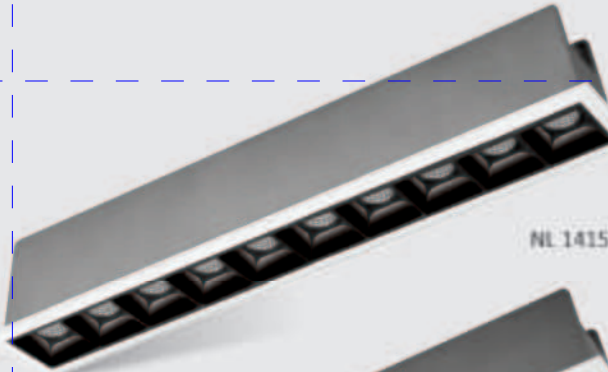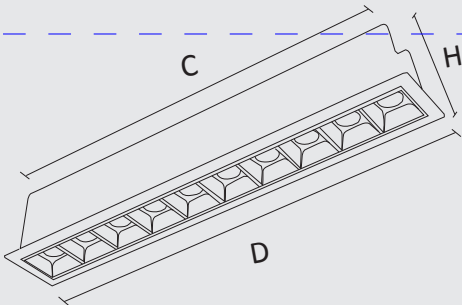

Specification			
Model	NL 1414	NL 1415	NL 1416
Power (W)	10W/12W	17W	25W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Reflector	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Beam Angle	45°	45°	45°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 147x45mm H : 49mm C : 140x37mm	D : 280x45mm H : 49mm C : 273x37mm	D : 415x45mm H : 49mm C : 405x37mm

Strike

Lineo - Recessed Spot Light Series

Features

In the architectural project, that gives light the task of overcoming the narrow boundaries of ordinariness, lighting can be the real surprise.


- Tunable White versions available (2700K ÷ 5700K).
- IOT enabled options available where in one can create different scenes through gadgets like Remote, Mobiles, Tablet, Laptops etc.
- Main body with radiant surface made of die-cast aluminium.
- Special body color combination like White, Black, Dark gray.

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Extra Wide Full Difuse 120°

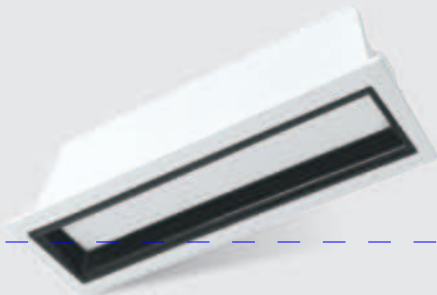

NL 1414-FR



NL 1414A



NL 1414B




NL 1414C



Specification				
Model	NL 1414A	NL 1414B	NL 1414-C	NL 1414-FR
Power (W)	10W/12W	10W/12W	10W/12W	10W/12W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K/4K/6K/TW	3K/4K/6K/TW
Optics	Reflector	Reflector	Reflector	Diffused
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White+ Refl. Black	White+ Refl. Black
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Beam Angle	45°	45°	45°	45°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 147x45mm H : 49mm C : 147x37mm	D : 147x45mm H : 49mm C : 147x37mm	D : 147x45mm H : 49mm C : 147x37mm	D : 147x45mm H : 49mm C : 147x37mm

Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

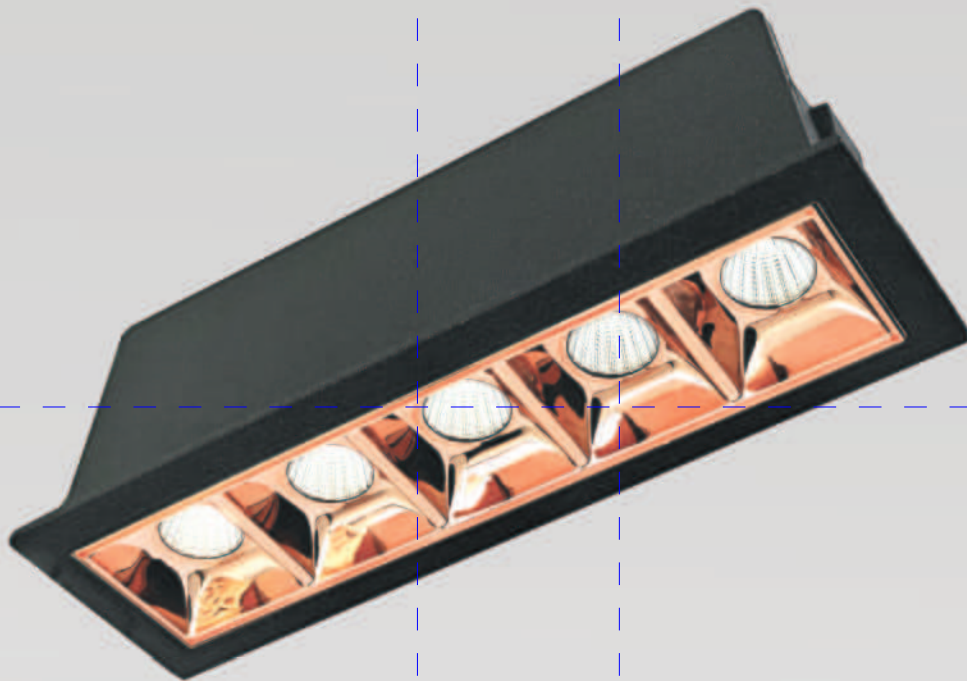

Strike

Metallic Recessed Spot Light
Series

Strike

Metallic Recessed Spot Light Series

Features





Strike - Metallic is an extension of STRIKE Lineo Regular 45mm series with vibrant Metalic Mirror finish like Silver Chrome and True Copper offering new design possibility and touch of a metal in black n white world of lighting.

- Chrome Silver mirror finish / True Copper mirror finish
- Configuration of 5/10/15 LED Module
- Special body color combination like White, Black, Dark gray, Beige/Cream

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries


Body Color - White / Black
Reflector Option - Silver Chrome / Rose Gold

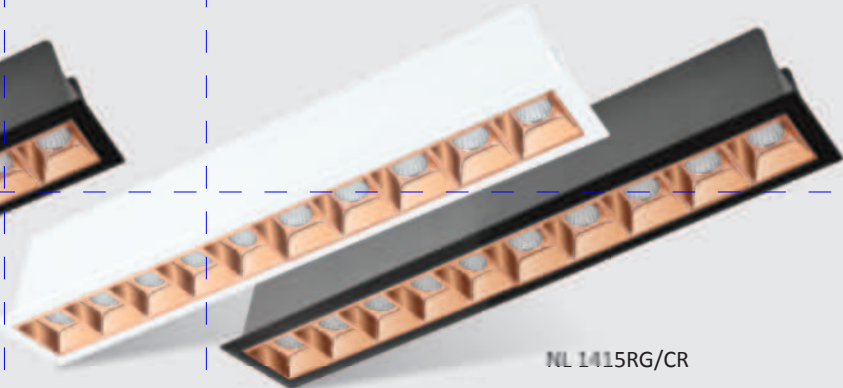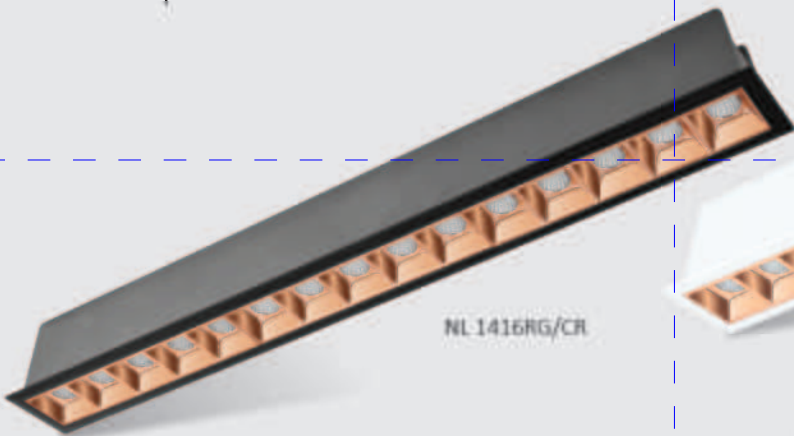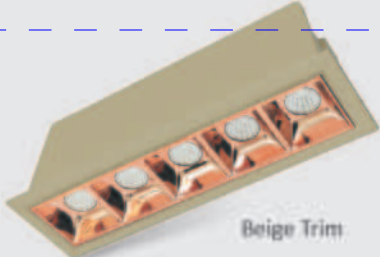

Specification			
Model	NL 1414RG/CR	NL 1415RG/CR	NL 1416RG/CR
Power (W)	10W/12W	17W	25W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Reflector	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	Ring - White/Black Reflector - Rose Gold / Silver Chrome		
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Beam Angle	45°	45°	45°
Life Span (Hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D: 147x45mm H: 49mm C: 140x37mm	D: 280x45mm H: 49mm C: 273x37mm	D: 415x45mm H: 49mm C: 405x37mm

Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

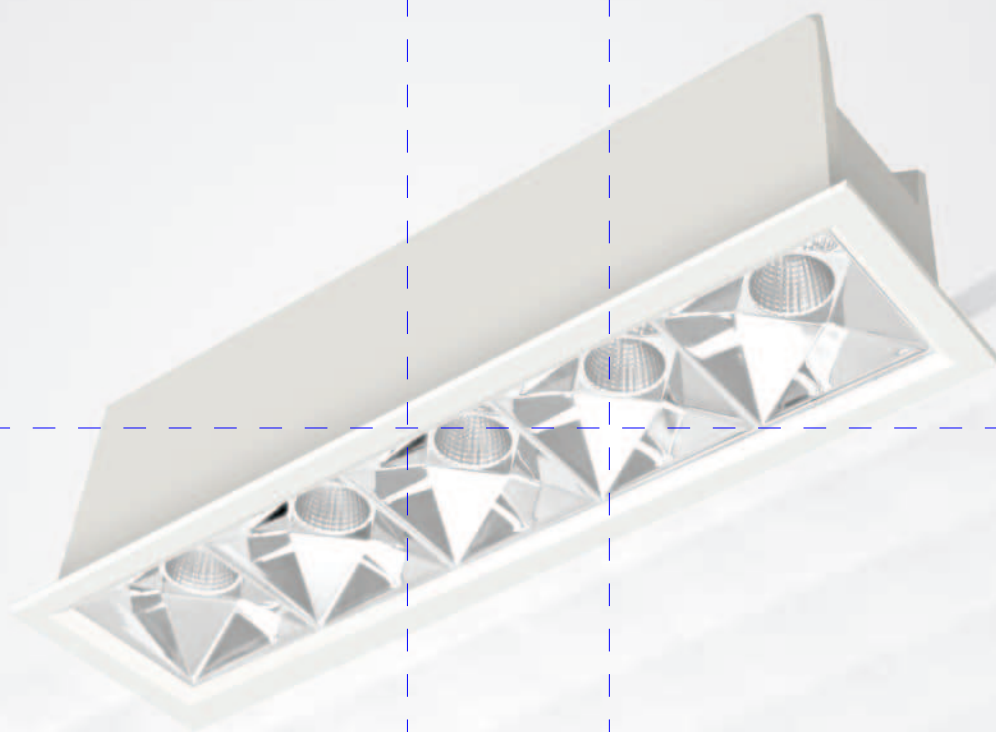

VersaRay

Ceiling recessed downlight

VersaRay

Ceiling recessed downlight

Features


- Aluminium die cast housing.
- PC reflector for better Beam control.
- Complete Family range Fixed, Adjustable & Wall washer is available.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.

Applications


- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels

Exchangeable with 9 Different Light Pattern with same dimension



Spot Light

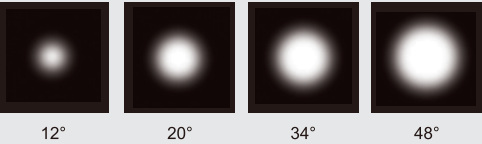

Flood Light

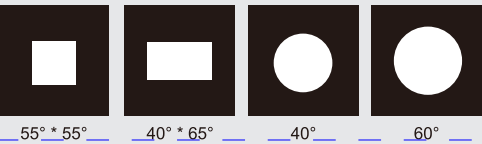

Wall Washer

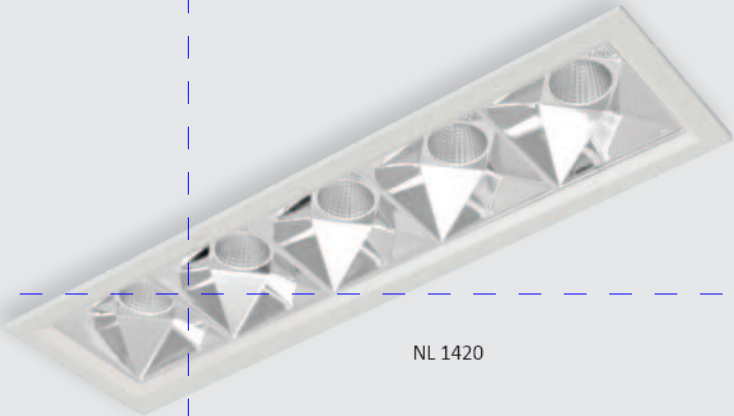


Specification			
Model	NL 1420		
Power (W)	10W/12W		
Color Temperature (CCT)	3K/4K/6K/TW		
Optics	Reflector		
Beam Angle	15°,24°,34°,48° Flood 60° Square 55°x55° Rect 40°x65° Wallwasher		
Finish	White/Black		
Color Rendering Index (CRI)	>80		
Protection Rating (IP)	IP20		
Dimming	Non Dimmable/Triac (Phase Cut) / 1-10V / Dali		
Life Span (hours)	50,000 Hrs		
Luminous Flux	80~85Lm/W		
Dimension	D : 164x 45mm H : 50mm C : 155x 35mm		



Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

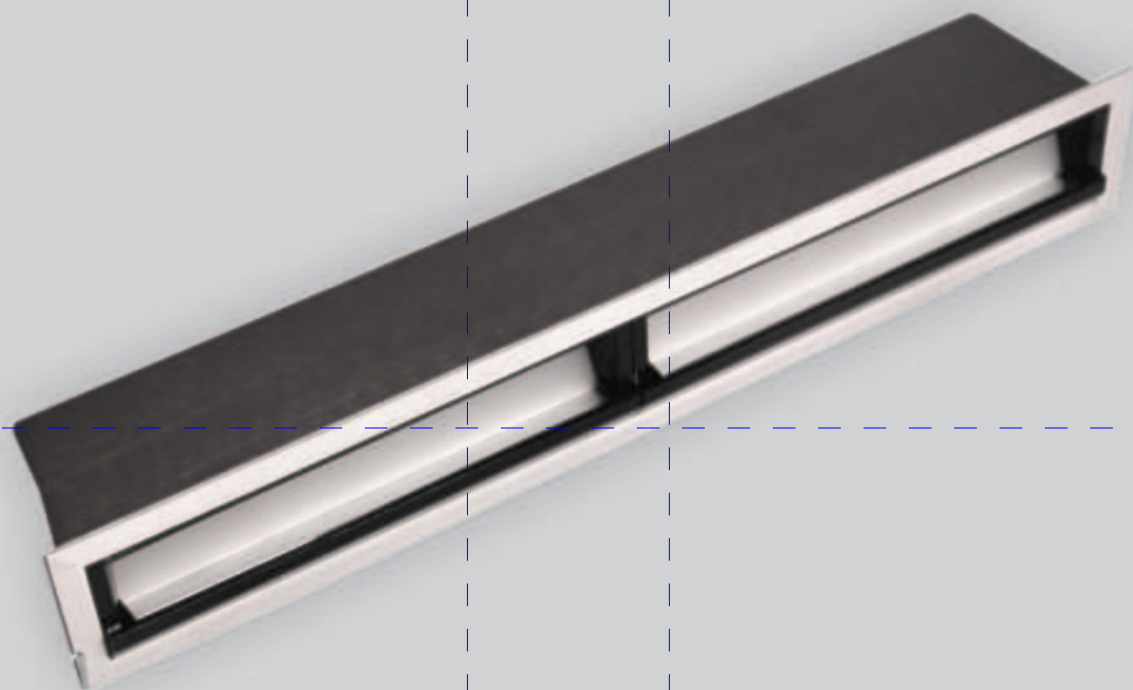


Strike

Even Recessed - Wall Washer
Series

Strike

Even Recessed - Wall Washer

Series







Features

- Taking the road is the metaphor for walking towards a goal even and especially for lighting designers, when light want to point at a way with delicacy, consistency with the project and with the same visual power
- Configuration of 10W, 17W, 25W LED
- Black anti-glare angular fixed wall washer
- Special body color combination like White, Black

Applications


- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries

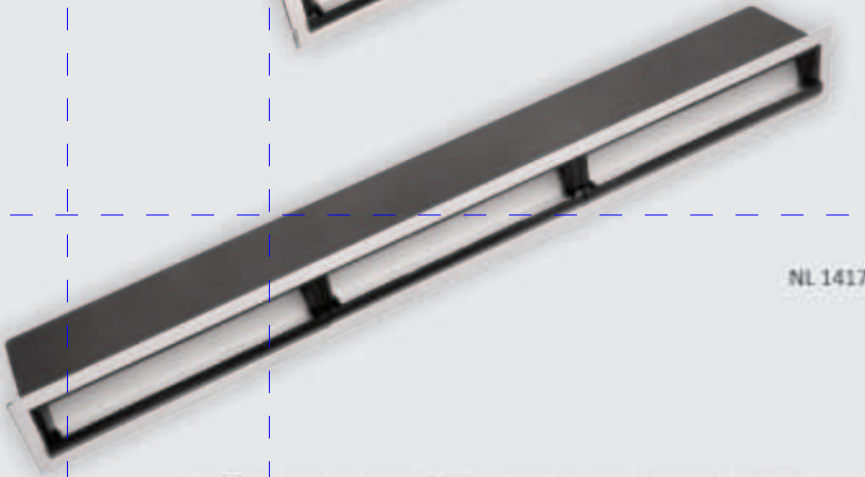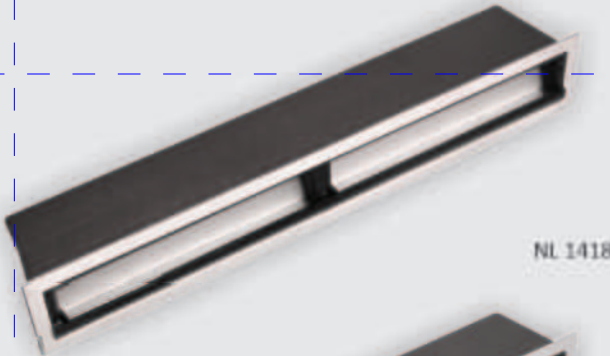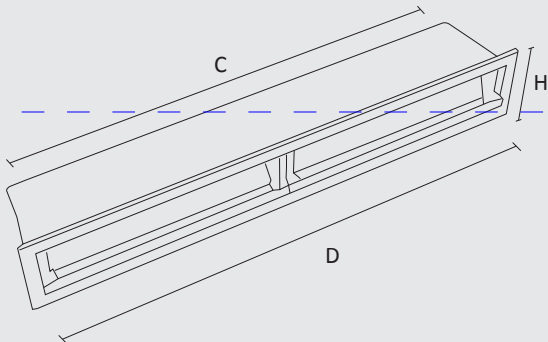

Specification			
Model	NL 1417	NL 1418	NL 1419
Power (W)	10W/12W	17W	25W
Color Temperature (CCT)	3K, 4K, 6K, TW	3K, 4K, 6K, TW	3K, 4K, 6K, TW
Optics	Diffused Reflector	Diffused Reflector	Diffused Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 147x45mm C : 140x37mm H : 49mm	D : 280x45mm C : 273x37mm H : 49mm	D : 415x45mm C : 405x37mm H : 49mm

Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

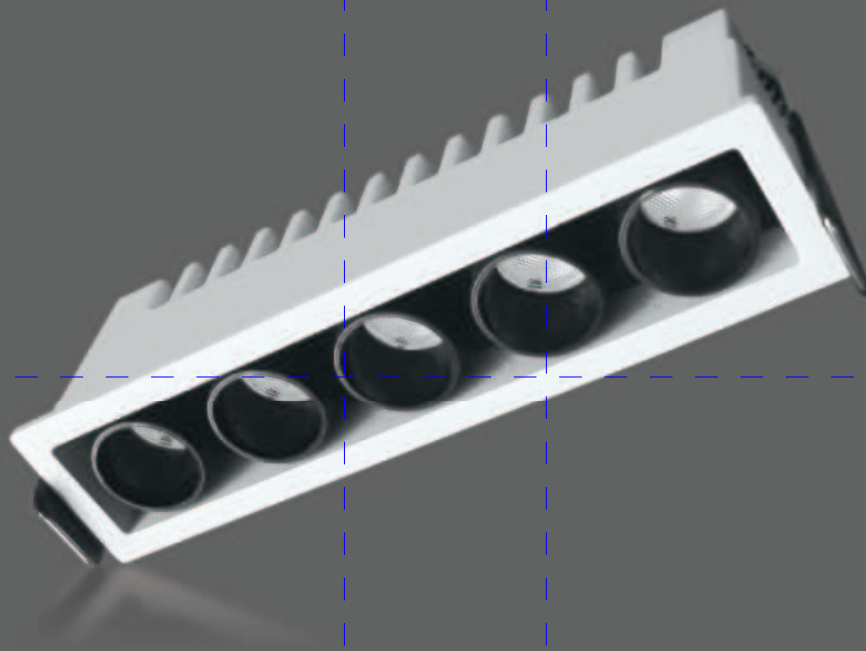

Brillo/Glowman

Anti Glare Recessed Spot Light
Series

Brillo

Anti-glare Recessed Spot Light Series




Features


- The main body features a radiant surface made of die-cast aluminum, ensuring durability and effective heat dissipation.
- Available in a range from 3000K to 6000K, allowing for customizable lighting that adapts to different moods and activities.
- The fixture is designed for tool-free installation, making it user-friendly and efficient
- This innovative design is integrated into a sleek black antiglare screen, which effectively minimizes glare and enhances visual comfort.

Applications

- Living Room
- Lobby
- Showrooms
- Offices
- Corridor
- Study Room



NL 1571

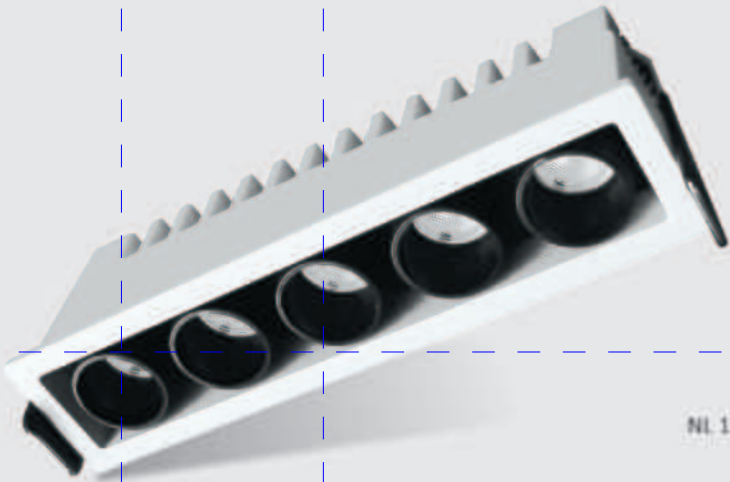

NL 1572



36°



IP20
RATED



≥ 80 CRI



Dimming
1-10V/0-10V
DALI



Hi-Power LED



2
Years
Warranty



BIS



Available Finish



TUNABLE WHITE
(2700K-6500K)

Specification		
Model	NL 1571	NL 1572
Power (W)	6W	12W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K/TW
Optics	Reflector	Lens
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	Non-Dimmable	Non-Dimmable
Beam Angle	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs
Dimension	D : 78mmx28mm H : 38mm C : 74mmx24mm	D : 128mmx28mm H : 38mm C : 116mmx24mm

Glowman

Anti-glare Recessed Spot Light Series




Features

- The main body features a radiant surface made of die-cast aluminum, ensuring durability and effective heat dissipation.
- Available in a range from 3000K to 6000K, allowing for customizable lighting that adapts to different moods and activities.
- The fixture is designed for tool-free installation, making it user-friendly and efficient
- This innovative design is integrated into a sleek black antiglare screen, which effectively minimizes glare and enhances visual comfort.

Applications

- Living Room
- Lobby
- Showrooms
- Offices
- Corridor
- Study Room



NL-1575




NL-1576



Specification		
Model	NL 1575	NL 1576
Power (W)	6W	12W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K/TW
Optics	Reflector	Reflector
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	Non-Dimmable	Non-Dimmable
Beam Angle	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs
Dimension	D : 69mmx30.5mm H : 27mm C : 64mmx25mm	D : 129mmx33mm H : 31.2mm C : 122mmx25mm

Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

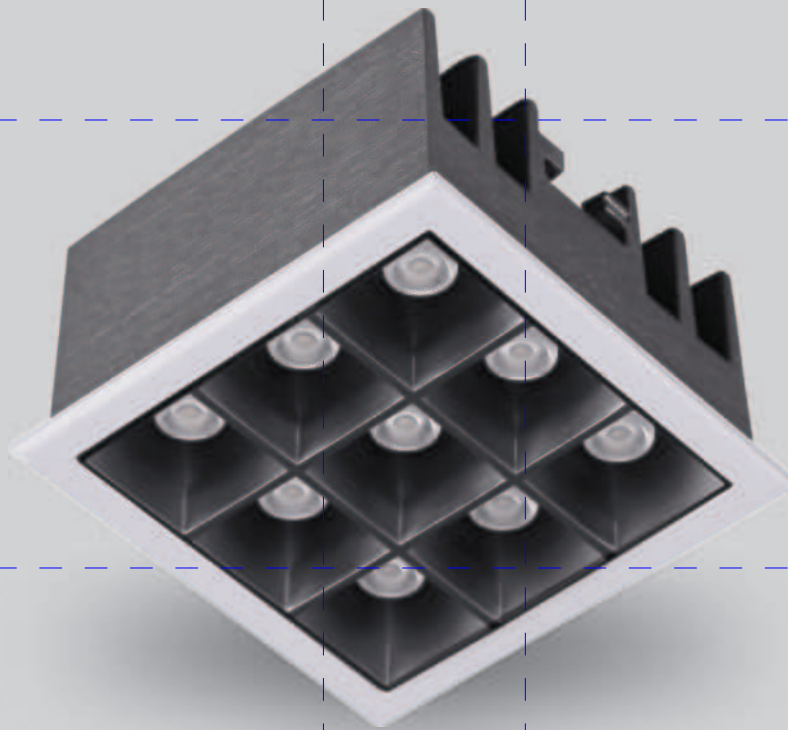

Strike Minima 32mm Recessed Spot Light Series

Strike Minima 32mm

Recessed Spot Light Series

NIRVANALIGHT®
Enlighten Your Life

Features


- Strike Minima 32 mm is minimalistic but expresses the maximum of its functionality through a light beam that interprets the surfaces it illuminates, by giving them new and unexpected purposes.
- A miniature version of strike with 32mm width in 3 options - 3Led (6w-480 Lumen), 6 LED, 12 LED.

Applications

- Living Room
- Lobby
- Showrooms
- Offices
- Corridor
- Study Room




NL 1421-6W




NL 1441-4W



Fix Beam

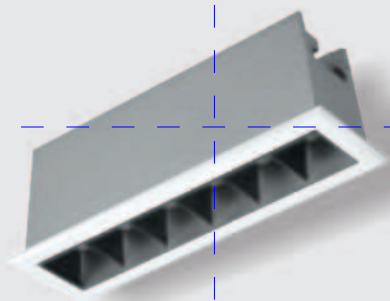


NL 1422-12W



NL 1442-8W



NL 1423-20W

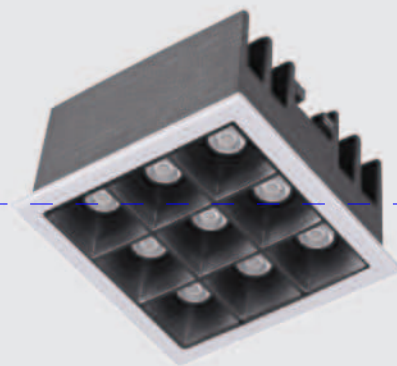

NL 1443-15W




Specification

Model	NL 1421	NL 1422	NL 1423	NL 1441	NL 1442	NL 1443
Power (W)	6W	12W	20W	4W	8W	15W
Color Temperature (CCT)	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K
Optics	Lens	Lens	Lens	Lens	Lens	Lens
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT					
Beam Angle	38°	38°	38°	38°	38°	38°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 62x32mm H : 40mm C : 57x28mm	D : 108x32mm H : 40mm C : 104x28mm	D : 204x32mm H : 40mm C : 200x28mm	D : 52x32mm H : 40mm C : 46x26mm	D : 52x52mm H : 40mm C : 46x46mm	D : 71x71mm C : 65x65mm H : 40mm



Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

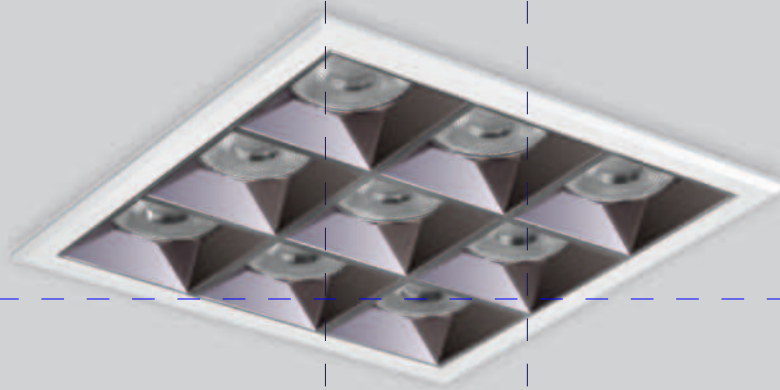

Strike Maxima 54mm Recessed Spot Light Series

Strike

Maxima 54 mm





Recessed Spot Light Series

Features

- Light and shades, dream and world. When light overcomes shadow, space opens to new perspectives and the construction of welcoming environments begins.
- Strike - Maxima with direct emission, carries into the real project the dream of calm, pleasantness, the ultimate visual comfort.

Applications


- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries

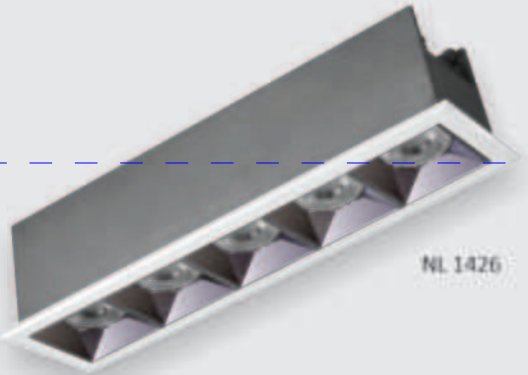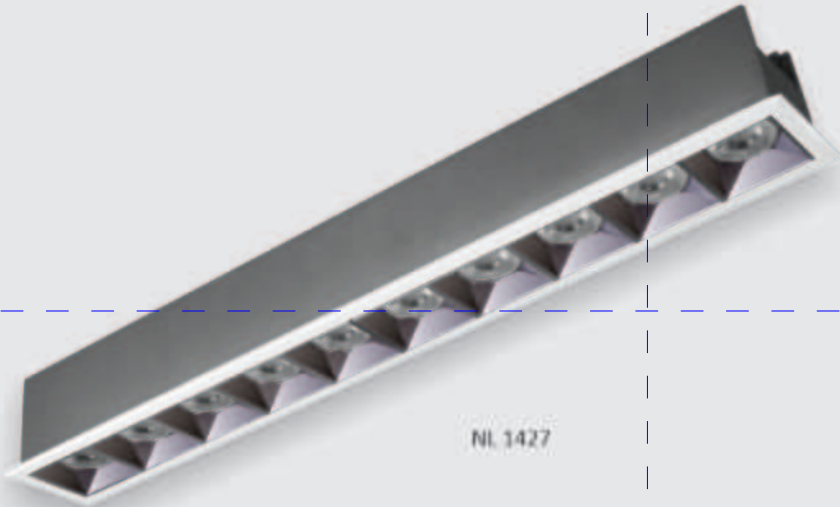


Specification				
Model	NL 1424	NL 1425	NL 1426	NL 1427
Power (W)	6W	12W	20W	35W
Color Temperature (CCT)	3K, 4K	3K, 4K	3K, 4K	3K, 4K
Optics	Lens	Lens	Lens	Lens
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Beam Angle	36°	36°	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 54x54mm H : 50mm C : 49x49mm	D : 130x54mm H : 52mm C : 125x49mm	D : 206x54mm H : 52mm C : 201x49mm	D : 396x54mm H : 52mm C : 390x49mm

Strike Maxima 54 mm


Recessed Spot Light Series



RECESSED MOUNTED

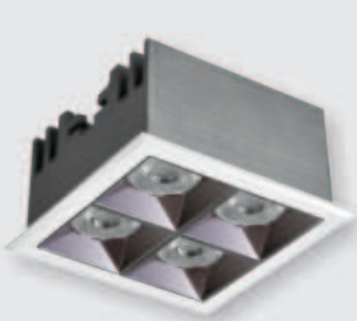

NL 1428

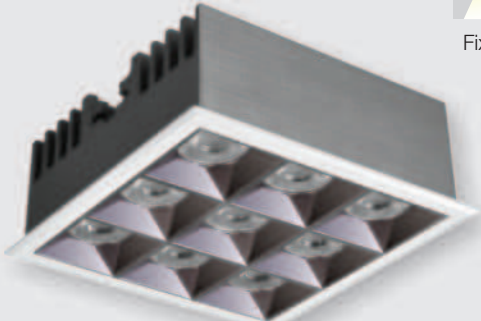


NL 1429

SURFACE MOUNTED



NL 1430

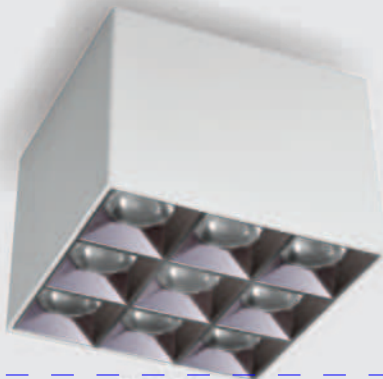

NL 1431

Specification				
Model	NL 1428	NL 1429	NL 1430	NL 1431
Power (W)	15W	35W	15W	35W
Color Temperature (CCT)	3K, 4K	3K, 4K	3K, 4K	3K, 4K
Optics	Lens	Lens	Lens	Lens
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Beam Angle	36°	36°	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 92x92mm H : 52mm C : 87x87mm	D : 130x130mm H : 52mm C : 125x125mm	D : 82x82mm H : 80mm	D : 120x120mm H : 90mm



Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life



Strike Circo Recessed Spot Light Series

Strike

Circo Recessed Spot Light


Series

Features

- There is always a story to tell, Probably hidden in the shadow; to describe it, it is necessary the same desecration, the taste for a style that shows without showing itself. The Circular design in Strike - Circo, A range of recessed downlights, is ideal for those who choose to distinguish themselves.
- This Circo range of STRIKE is available in 4 different conjugation like 6 LED, 12 LED, 18 LED, 24 LED

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries

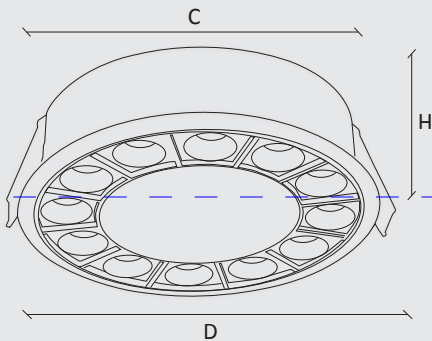

Fix Beam



NL 1432



NL 1433



NL 1434



NL 1435



Specification				
Model	NL 1432	NL 1433	NL 1434	NL 1435
Power (W)	8W	15W	20W	30W
Color Temperature (CCT)	3K, 4K	3K, 4K	3K, 4K	3K, 4K
Optics	Reflector	Reflector	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Beam Angle	36°	36°	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 80mm H : 35mm C : 75mm	D : 128mm H : 35mm C : 120mm	D : 173mm H : 35mm C : 165mm	D : 218mm H : 35mm C : 205mm



Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life



Orofi Surface Down Light Series

Orofi

Surface Down Light

Series


Features

The eye stares at the detail, a surface mounted, wall mounted or suspended luminaire, discloses it from above with a direct light, thus uncovering a brand-new perspective that changes the balance of the living space and makes it unique.

- Aluminium die cast housing.
- Surface mounted light suitable for concrete, wooden or any ceiling where screw fixing is possible.
- Wide range of wattage & CCT.

Applications


- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



Fix Beam



NL 1478



Adjustable Optics




NL 1479

Specification		
Model	NL 1478	NL 1479
Power (W)	10W	10W
Color Temperature (CCT)	3K, 4K, 6K	3K, 4K, 6K
Optics	Lens	Lens
Housing	Aluminum Die cast	Aluminum Die cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT	
Beam Angle	24°	24°
Life Span (hours)	50,000 Hrs	50,000 Hrs
Dimension	D : 91mm H : 60mm	D : 85mm H : 90mm

Orofi

Surface Down Light

Series



Adjustable Optics

Features

The eye stares at the detail, a surface mounted, wall mounted or suspended luminaire, discloses it from above with a direct light, thus uncovering a brand-new perspective that changes the balance of the living space and makes it unique.

- Aluminium die cast housing.
- Surface mounted light suitable for concrete, wooden or any ceiling where screw fixing is possible.
- Wide range of wattage & CCT.

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries



NL 1464




NL 1465

Specification		
Model	NL 1464	NL 1465
Power (W)	8W	2x8W
Color Temperature (CCT)	3K, 4K, 6K	3K, 4K, 6K
Optics	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT	
Beam Angle	60°	60°
Life Span (hours)	50,000 Hrs	50,000 Hrs
Dimension	D : 100x100mm H : 100mm	D : 100x200mm H : 100mm

Orofi

Surface Down Light

Series



Adjustable Optics


Features

The eye stares at the detail, a surface mounted, wall mounted or suspended luminaire, discloses it from above with a direct light, thus uncovering a brand-new perspective that changes the balance of the living space and makes it unique.

- Aluminium die cast housing.
- Surface mounted light suitable for concrete, wooden or any ceiling where screw fixing is possible.
- Wide range of wattage & CCT.


Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries

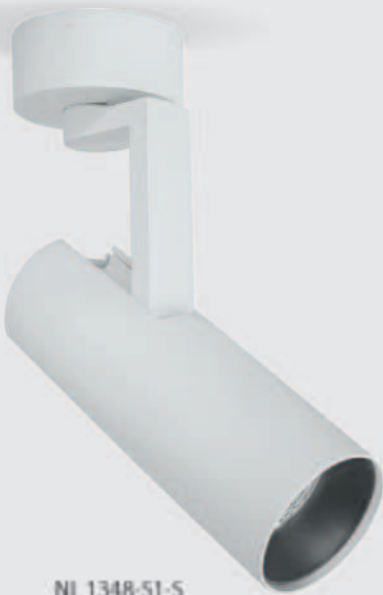

NL 1348-S1-S

Specification				
Model	NL 1348-S1-S	NL 1348-S2-S	NL 1348-S3-S	NL 1491
Power (W)	10W	20W	32W	2x12W
Color Temperature (CCT)	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K	3K, 4K, 6K
Optics	Reflector	Reflector	Reflector	Reflector
Housing	Aluminium Die cast	Aluminium Die cast	Aluminium Die cast	Aluminium Die cast
Finish	White	White	White	White
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT			
Beam Angle	24°	24°	24°	24°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 50mm H : 208mm	D : 60mm H : 229mm	D : 71mm H : 249mm	D : 152x78mm H : 164mm



NL 1491




Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life



Optima Retail Recessed Down Light Series

Optima Retail Recessed Down Light Series



Features

In architectural project that gives light the task of overcoming the narrow boundaries of ordinariness, lighting can be the real surprise.
 Recessed down lights arouses an amazement deriving from the transformation of a light source in real sculpture of spaces, in an elegant, not invasive and therefore, absolutely evident way.

- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries




NL 0391



NL 0421




NL 0427




Specification			
Model	NL 0391	NL 0421	NL 0427
Power (W)	25W/32W	36W/42W	32W/36W
Color Temperature (CCT)	3K, 4K, 6K,TW	3K, 4K, 6K,TW	3K, 4K, 6K,TW
LED Type	COB	COB	COB
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Beam Angle	40°	40°	40°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 115mm H : 121mm C : 103mm	D : 150mm H : 160mm C : 130mm	D : 135mm H : 124mm C : 123mm

Optima Retail Recessed Down Light Series



Adjustable
Optics




NL 1330

Specification			
Model	NL 1328	NL 1329	NL 1330
Power (W)	11W/15W	24W/32W	36W/42W
Color Temperature (CCT)	3K, 4K, 6K,TW	3K, 4K, 6K,TW	3K, 4K, 6K,TW
Optics	Reflector	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast	Aluminum Die cast
Finish	White	White	White
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP20	IP20	IP20
Dimming	0-10V/1-10V Analog/ Phase-cut/DALI/TWRF/TWBT		
Beam Angle	60°	60°	60°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Dimension	D : 94mm H : 72mm C : 85mm	D : 148mm H : 121mm C : 140mm	D : 180mm H : 147mm C : 170mm




Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

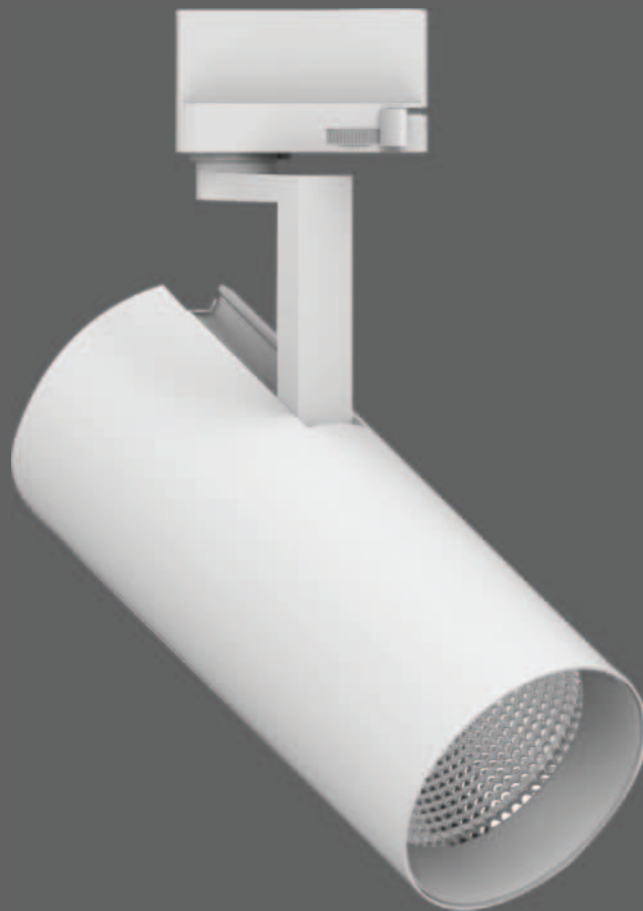

Twist Retail Track Series

Twist Retail Track Series

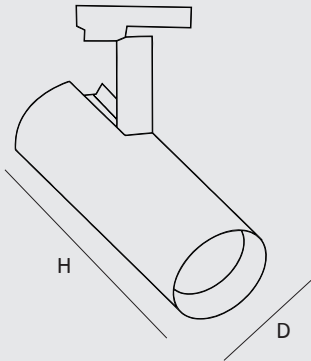

Specification

Model	NL 1348-S1	NL 1348-S2
Power (W)	11W	20W
Color Temperature (CCT)	3K, 4K, 6K	3K, 4K, 6K
Optics	Reflector	Reflector
Housing	Aluminum Die cast	Aluminum Die cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP20	IP20
Dimming	Non Dimmable	Non Dimmable
Beam Angle	24°	
Life Span (hours)	50,000 Hrs	50,000 Hrs
Dimension	D : 50mm H : 208mm	D : 60mm H : 229mm

Twist Retail Track Series




Features

- Intensity and strength depending on the width of the beam, a bright light similar to that f a halogen lamp to create visible and sable spaces, dominant in the architectural project.
- Aluminium die cast housing.
- Track offers design freedom, rapid adoption of new lighting scheme in case layout change.
- Increase flexibility in design at last moment changes.
- Beam options available like Narrow, Medium, Wide.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.
- IOT – Product can be operated through handheld devices like Smart phone, Tablet, Laptop or Desktop even from remote location over internet or Bluetooth intranet network.

Applications

- Kitchens
- Living Room
- Bedrooms
- Gallery
- Pantries

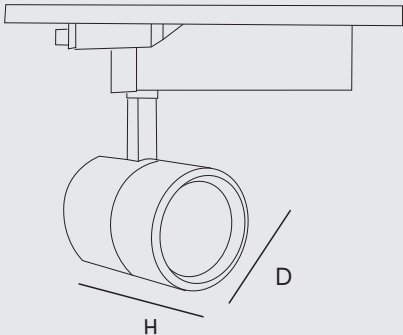

NL 1347-S2



IP20
RATED



≥ 80 CRI
≥ 90 CRI



Dimming
1-10V/0-10V
DALI



COB LED



2
Years
Warranty



BIS



TUNABLE WHITE
AVAILABLE




Available Finish

Specification	
Model	NL 1347-S3
Power (W)	32W
Color Temperature (CCT)	3K, 4K, 6K, TW
Optics	Reflector
Housing	Aluminum Die cast
Finish	White
Color Rendering Index (CRI)	>80
Protection Rating (IP)	IP20
Dimming	Non Dimmable
Beam Angle	38°
Life Span (hours)	50,000 Hrs
Dimension	D : 82mm H : 180mm



Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

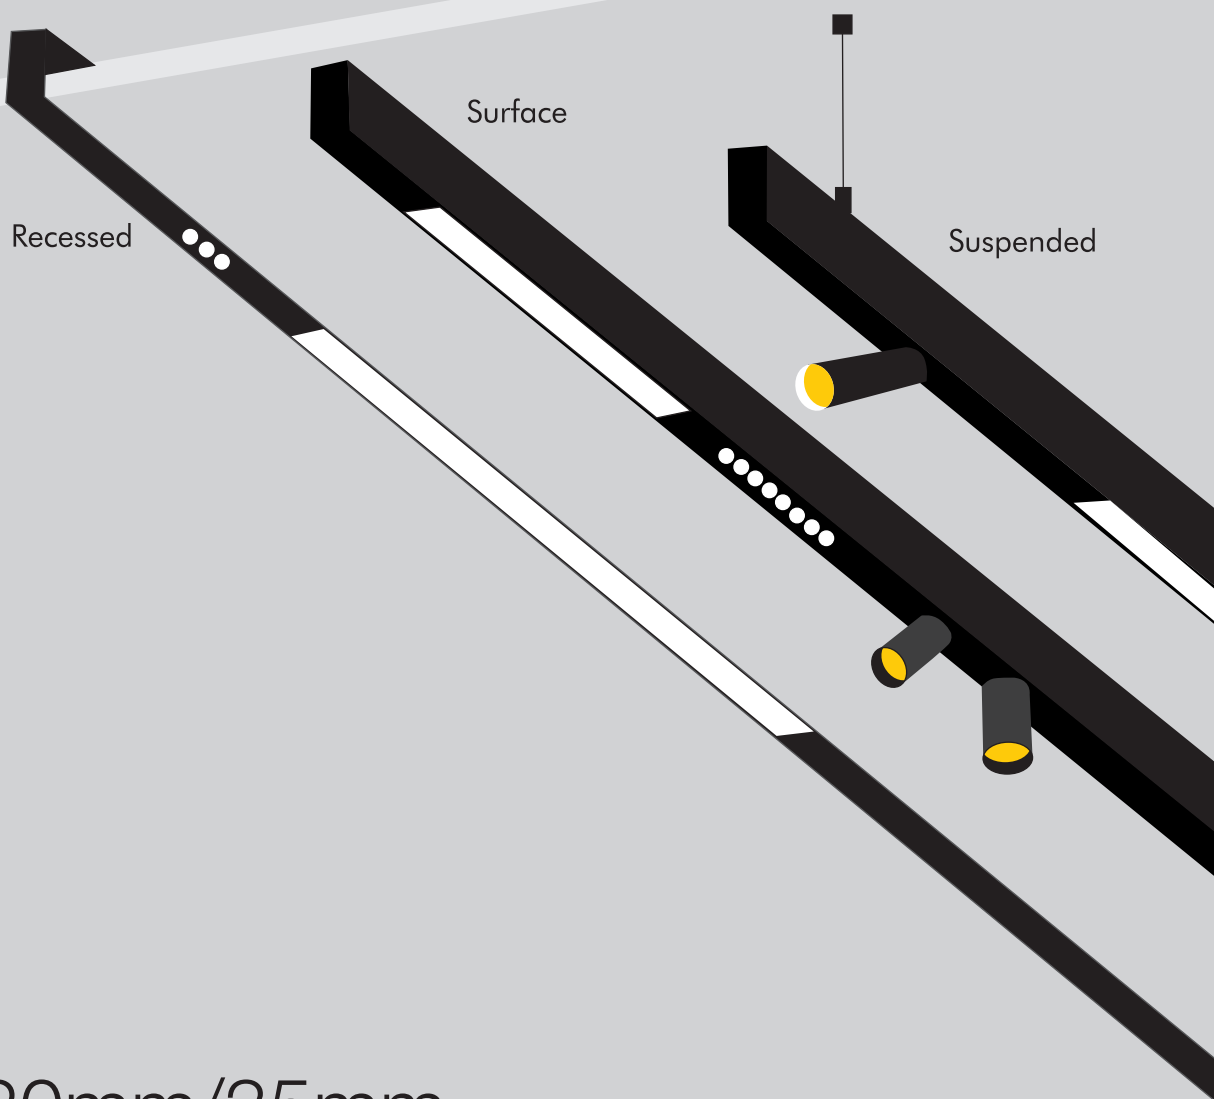

Cruiser - 20mm/35mm
Magnetic + Lockable
Lights

Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life




Cruiser - 20mm Magnetic + Lockable Lights

Cruiser - 20mm

Magnetic + Regular

Lights




Features

- There are many solutions to turn on strong emotions, illuminating a
- space playing with light in a proper, rational way and at the same
- time, with imagination and creativity.
- Aluminium extruded housing
- Dot less diffuser
- Wide range of wattage & CCT in 80 CRI like 3000K, 4000K, 6000K.
- Special CCT available on request like, 2200K, 2700K, 3500K, 5000K.
- High CRI available on request like 3000K and 4000K
- Tunable white option available over RF or Bluetooth.
- IOT - Product can be operated through handheld devices like
- smartphone, tablet, laptop or Desktop even form remote location over
- internet or Bluetooth intranet Network.

Applications

- Hall
- Bedroom
- Kitchen
- Landscape lighting
- Sculptures

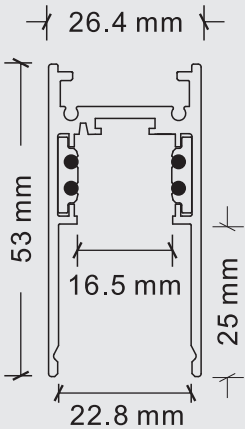

MODEL :



NL ML20 S200- 2000mm



NL ML20-S
CORNER L90



NL ML20-35 Suspension 1M

Specification	Suspended Magnetic Track
Model	NL ML20 S200
Operating Voltage	48V DC
Housing	Aluminum
Finish	Black
CRI	>80
IP	IP 20
Dimming	Non/Dali Dimmable
Life Span	50,000 Hrs
Size	L: 2000mm W: 26 mm H:53 mm

Cruiser - 20mm

Magnetic + Regular

Lights




Recessed

Features


- There are many solutions to turn on strong emotions, illuminating a
- space playing with light in a proper, rational way and at the same
- time, with imagination and creativity.
- Aluminium extruded housing
- Dot less diffuser
- Wide range of wattage & CCT in 80 CRI like 3000K, 4000K, 6000K.
- Special CCT available on request like, 2200K, 2700K, 3500K, 5000K.
- High CRI available on request like 3000K and 4000K
- Tunable white option available over RF or Bluetooth.
- IOT - Product can be operated through handheld devices like
- smartphone, tablet, laptop or Desktop even form remote location over
- internet or Bluetooth intranet Network.

Applications

- Hall
- Bedroom
- Kitchen
- Landscape lighting
- Sculptures

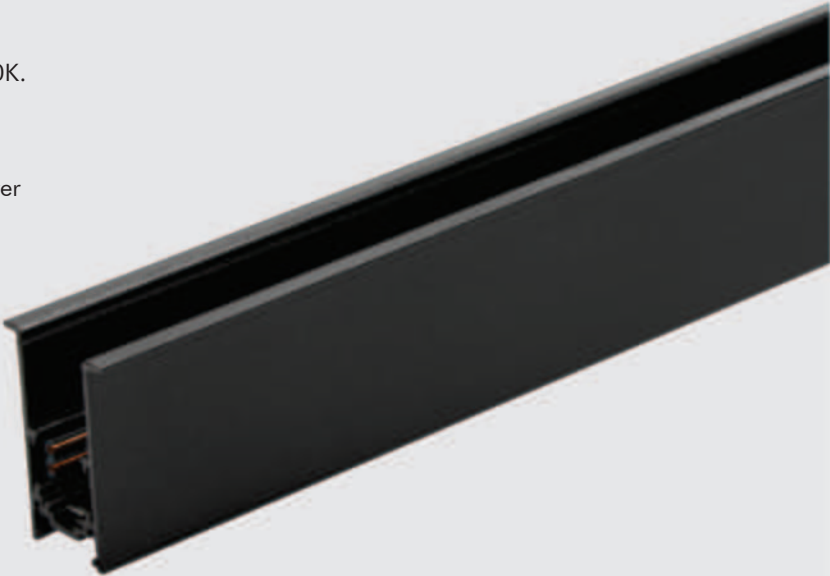

NL ML20 R2 100- 1000mm

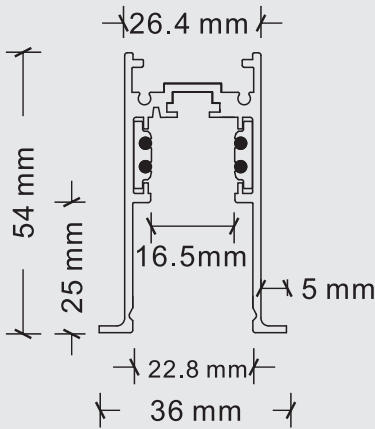

MODEL NL ML20-R3
Corner L90



MODEL : NL ML20 R3 CB

Specification	Trim Magnetic Track		
Model	NL ML20 R2 100	NL ML20 R2 200	NL ML20 R2 300
Operating Voltage	48V DC	48V DC	48V DC
Housing	Aluminum	Aluminum	Aluminum
Finish	Black	Black	Black
CRI	>80	>80	>80
IP	IP 20	IP 20	IP 20
Dimming	Non/Dali Dimmable	Non/Dali Dimmable	Non/Dali Dimmable
Life Span	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	L: 1000mm W: 70 mm H: 53 mm	L: 2000mm W: 36 mm H:54 mm	L: 3000mm W: 36 mm H:54 mm

Cruiser - 20mm

Magnetic + Regular

Lights



Trimless

Features


- There are many solutions to turn on strong emotions, illuminating a
- space playing with light in a proper, rational way and at the same
- time, with imagination and creativity.
- Aluminium extruded housing
- Dot less diffuser
- Wide range of wattage & CCT in 80 CRI like 3000K, 4000K, 6000K.
- Special CCT available on request like, 2200K, 2700K, 3500K, 5000K.
- High CRI available on request like 3000K and 4000K
- Tunable white option available over RF or Bluetooth.
- IOT - Product can be operated through handheld devices like
- smartphone, tablet, laptop or Desktop even form remote location over
- internet or Bluetooth intranet Network.

Applications

- Hall
- Bedroom
- Kitchen
- Landscape lighting
- Sculptures



NL ML20 R3 100

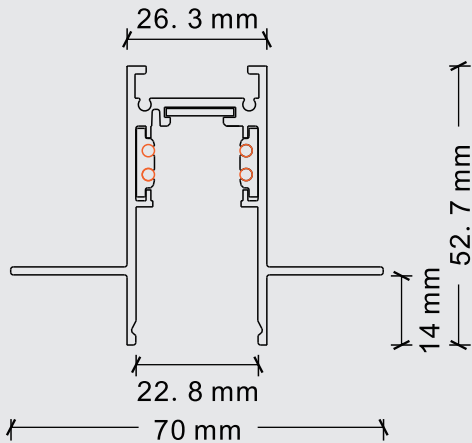

NL ML20-S Corner L90
90° Corner for connecting surface
suspended magnetic track
from ceiling to ceiling
installation C to C

Specification	Trimless Magnetic Track		
Model	NL ML20 R3 100	NL ML20 R3 200	NL ML20 R3 300
Operating Voltage	48V DC	48V DC	48V DC
Housing	Aluminum	Aluminum	Aluminum
Finish	Black	Black	Black
CRI	>80	>80	>80
IP	IP 20	IP 20	IP 20
Dimming	Non/Dali Dimmable	Non/Dali Dimmable	Non/Dali Dimmable
Life Span	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	L: 1000mm W: 73 mm H: 53 mm	L: 1000mm W: 73 mm H: 53 mm	L: 1000mm W: 73 mm H: 53 mm

Cruiser - 20mm Magnetic + Regular Lights

Accessories for 20mm Magnetic Series



NL ML20-S CORNER L90

90° Corner for connecting surface / suspended magnetic track from ceiling to ceiling installation C to C



NL ML20-R2 CORNER L90

90° Corner for connecting Recessed magnetic track from ceiling to ceiling installation C to C



NL ML20-R3 CORNER L90

90° Corner for connecting Recessed magnetic track from ceiling to ceiling installation C to C



NL ML20 PC4 DALI

Straight Jointer - 4 Wire Dc Dali Power Wire For Magnetic Track Channel



NL ML20 SJ 4 DALI

Straight Jointer - 4 Wire Dc Dali Power Wire For Magnetic Track Channel



NL ML20 CORNER 4 DALI

Corner - 4 Wire Corner Dali Connected Module For All The Track Channel




NL ML20 PS48-100/ NL ML20 PS48-200

Integrated Power Supply For The Magnetic Track Channel, Non Dimmable




NL ML20 SUSPENSION KIT

1.5 Mtr Suspension Kit For Magnetic Track Channel



NL ML20 -S EC

End Cap For Surface/ Recessed & Trimless



NL ML20 STRAIGHT SUPPORT

Straight Jointer For Surface/ Suspended For Track Channel



NL ML20 R3 CB

Ceiling Support For Trim Magnetic Track Channel



NL ML20 STRAIGHT SUPPORT R

Straight Jointer For Recessed Track Channel

Tunable White Accessories



Remote
Bluetooth Remote Control For Magnetic Track Light



Switch Panel



Bluetooth Mesh

Cruiser - 20mm Magnetic + Regular Lights




NL ML20 LG600



NL ML20 LG300

Linear Diffused Track Spot

Specification		
Model	NL ML20 LG300	NL ML20 LG600
Power(W)	10W	20W
Color Temperature (CCT)	3K, 4K, TW	3K, 4K, TW
Operating Voltage	48V DC	48V DC
Beam Angle	90°	90°
Housing	Aluminum+PC	Aluminum+PC
Finish	Black	Black
Color Rendering Index (CRI)	>80	>80
Protecting Rating (IP)	IP20	IP20
Dimming	Non/Dali Dimmable	Non/Dali Dimmable
Life Span (Hours)	50,000 Hrs	50,000 Hrs
Size	L : 305mm W : 22mm H : 43mm	L : 605mm W : 22mm H : 43mm

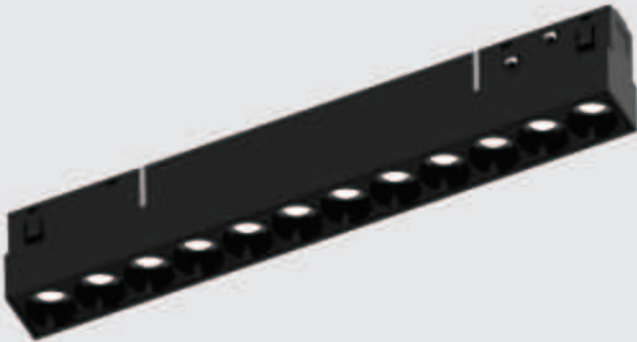

NL ML20 ST012

Linear Track Spot

Specification		
Model	NL ML20 ST006	NL ML20 ST012
Power(W)	6W	12W
Color Temperature (CCT)	3K, 4K, TW	3K, 4K, TW
Operating Voltage	48V DC	48V DC
Beam Angle	25°/36°	25°/36°
Housing	Aluminum+PC	Aluminum+PC
Finish	Black	Black
Color Rendering Index (CRI)	>80	>80
Protecting Rating (IP)	IP20	IP20
Dimming	Non/Dali Dimmable	Non/Dali Dimmable
Life Span (Hours)	50,000 Hrs	50,000 Hrs
Size	L : 135mm W : 22mm H : 43mm	L : 220mm W : 22mm H : 43mm



NL ML20 ST006

Cruiser - 20mm Magnetic + Regular Lights



NL ML20 ST018 ADJ



NL ML20 ST012 ADJ

Linear Track Spot Adjustable

Specification		
Model	NL ML20 ST012 ADJ	NL ML20 ST018 ADJ
Power(W)	12W	18W
Color Temperature (CCT)	3K, 4K, TW	3K, 4K, TW
Operating Voltage	48V DC	48V DC
Beam Angle	25°/36°	25°/36°
Housing	Aluminum+PC	Aluminum+PC
Finish	Black	Black
Color Rendering Index (CRI)	>80	>80
Protecting Rating (IP)	IP20	IP20
Dimming	Non/Dali Dimmable	Non/Dali Dimmable
Life Span (Hours)	50,000 Hrs	50,000 Hrs
Size	L : 215.5mm W : 22mm H : 47.5mm	L : 315.5mm W : 22mm H : 47.5mm



NL ML20 SP007

COB Track Spot

Specification		
Model	NL ML20 SP007	NL ML20 SP012
Power(W)	6W	12W
Color Temperature (CCT)	3K, 4K, TW	3K, 4K, TW
Operating Voltage	48V DC	48V DC
Beam Angle	Aluminum+PC	Aluminum+PC
Housing	Black	Black
Finish	>80	>80
Color Rendering Index (CRI)	IP20	IP20
Protecting Rating (IP)	Non/Dali Dimmable	Non/Dali Dimmable
Dimming	50,000 Hrs	50,000 Hrs
Life Span (Hours)	L : 135mm W : 31mm H : 138mm	L : 135mm W : 45mm H : 123.5mm



NL ML20 SP012




Indoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life



Mini Magnetic Track Light

Mini Magnetic | Track Light

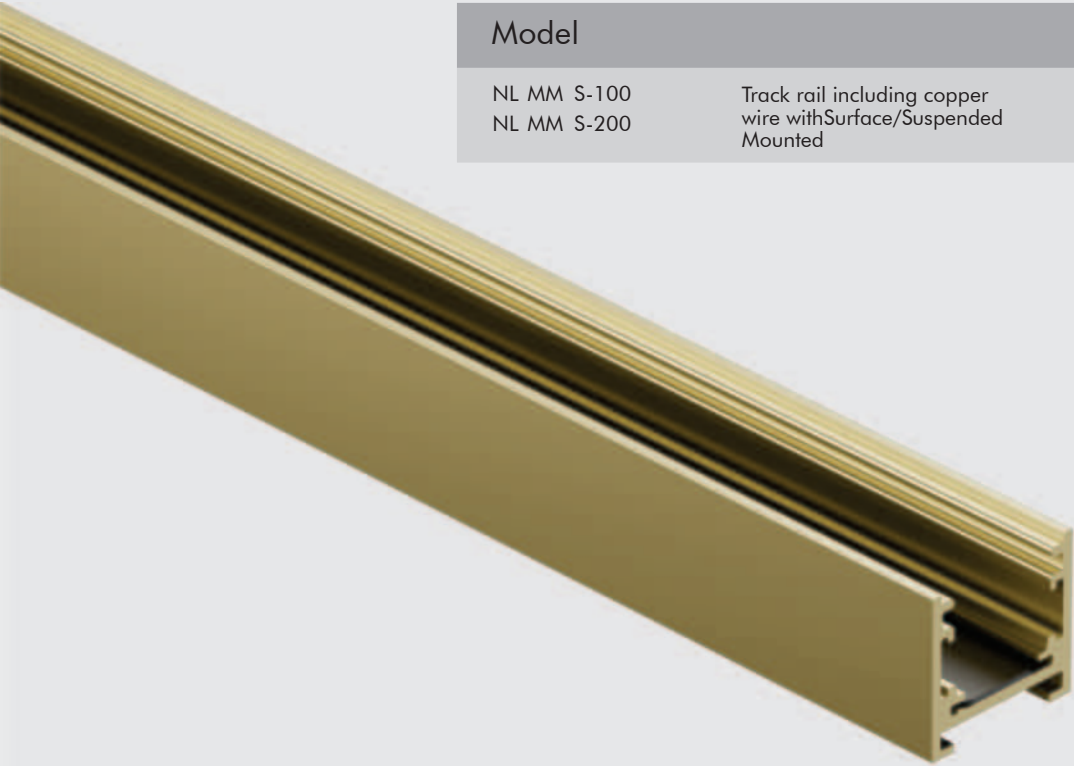

Model		Dimension
NL MM S-100	Track rail including copper wire withSurface/Suspended Mounted	L 1000 x W 19 x H 18 mm
NL MM S-200		L 2000 x W 19 x H 18 mm



Model		Dimension
NL MM R-200	Track rail including copper wire Recessed Mounted	L 2000 x W 19 x H 18 mm
NL MM R-300		L 3000 x W 19 x H 18 mm

Mini Magnetic Track Light

Features


- Aluminium die cast housing.
- PC reflector for better Beam control.
- Complete Family range Fixed, Adjustable & Wall washer is available.
- Wide range of wattage & CCT.
- Tuneable white option available over RF or Bluetooth.

Applications



- Home
- Malls
- Showrooms
- Offices
- Reception Area
- Hotels



NL MM SP006



NL MM RD-SP08



Specification

Model	NL MM 3570-6W	NL MM 35100-8W	NL MM 45100-10W	NL MM 7060-8W
Power (W)	6W	8W	10W	8W
Color Temperature (CCT)	3000K/4000k	3000K/4000k	3000K/4000k	3000K/4000k
Input Voltage	DC 48V	DC 48V	DC 48V	DC 48V
Housing	Aluminum	Aluminum	Aluminum	Aluminum
Lumin	420lm	550lm	770lm	650lm
Color Rendering Index (CRI)	>90	>90	>90	>90
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Beam Angle	36°	36°	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 35mm H : 70mm	D : 35mm H : 100mm	D : 45mm H : 100mm	D : 70mm H : 60mm


Mini Magnetic| Track Light



NL MM LG300




NL MM ST230





Specification

Model	NL MM LG300-12W	NL MM LG600-24W	NL MM ST230-10W	NL MM ST460-20W
Power (W)	12W	24W	10W	20W
Color Temperature (CCT)	3000K/4000k	3000K/4000k	3000K/4000k	3000K/4000k
Input Voltage	DC 48V	DC 48V	DC 48V	DC 48V
Housing	Aluminum	Aluminum	Aluminum	Aluminum
Lumin	700lm	1350lm	790lm	1600lm
Color Rendering Index (CRI)	>90	>90	>90	>90
Protection Rating (IP)	IP20	IP20	IP20	IP20
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Beam Angle	36°	36°	36°	36°
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	L : 302mm W : 19mm H : 27mm	L : 602mm W : 19mm H : 27mm	L : 232mm W : 19mm H : 27mm	L : 459mm W : 19mm H : 27mm



Mini Magnetic| Track Light

Accessories	Model	Dimension
	NL MM S-L90	Corner 90°(On same plane)with 2pcs connect plate+8pcs set screws+ 1pcs hexagonal key Surface/Suspended Mounted
	NL MM S-I90	Corner 90°(On perpendicular plane) with 2pcs connect plate+8pcs set screws+ 1pcs hexagonal key Surface/Suspended Mounted
	NL MM S EC	High side end cap(2pcs)-using with decorative cap Surface/Suspended Mounted
	NL MM S CORNER-FIX	Power Jointing Connector (On same plane)
	NL MM S CORNER-FLEXI	Power Jointing Connector (On perpendicular planes)
	NL MM S SJ	Power Jointing Connector (Straight)
	NL MM S PC2M	Feeder DC48V
	DD MM S BC50	Decorative cap (50CM)
	NL MM S Straight Support	Connect plate with 4pcs set screws+ 1pcs hexagonal key Surface/Suspended Mounted

Mini Magnetic| Track Light

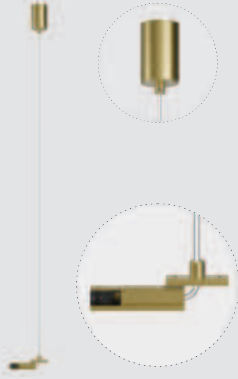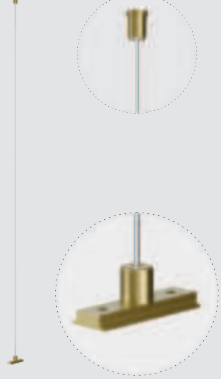Accessories	Model	
	NL MM SP+JB Power wire (2M 0.75mm ²) with 1pcs Feeder +1pcs mounting base+1pcs connect plate+2pcs self-tappingscrews+4pcs set screws+ 1pcs hexagonal key Suspended Mounted	 NL MM SP Suspension cable(2M)with 1pcs mounting base++1pcs connect plate+1pcs self-tapping screw+2pcs set screws+ 1pcs hexagonal key Suspended Mounted
Power Supplier	Model	
	DD MM PS48-150 DD MM PS48-200	Built in driver-150W- L320 x W19 x H37mm, cable length: 300mm Built in driver-200W- L324 x W22 x H43mm, cable length: 300mm

Ceiling recessed trimless available in black

Accessories	Model	Dimension
	NL MM R-L90	Corner 90°(On same plane) with 2pcs self-tapping screws Recessed Mounted
	NL MM R-I90	Corner 90°(On perpendicular planes) with 2pcs self-tapping screws Recessed Mounted
	NL MM S Straight Support	Connect plate with 4pcs set screws+ 1pcs hexagonal key Surface/Suspended Mounted

Matrix

Profile Lighting System

- Surface
- Recessed
- Suspended
- Curved
- Customize Design
- Acoustic





NL MS 5235

Surface

Features

- Aluminum Extruded Housing.
 - Dot Less Diffuser.
 - Flexibility In Customize As Per Site Requirement.
 - Tunable White Versions Available Over RF Or Bluetooth.
 - Designed for Mounting on ceiling / wall
 - High CRI & CCT Available On Request.

Applications

- Corporate Offices
 - Malls
 - Reception Area
 - Corridors
 - Residential Lighting
 - Restaurants





















Housing	: Aluminium Extrusion
Diffuser	: Diffuser (PMMA)
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K / TW
Driver	: Fulham / Osram
Wattage	: 8W/Ft
Mounting Type	: Surface
Dimensions	: Length: 4ft/8ft
Option Available	: Customize Length

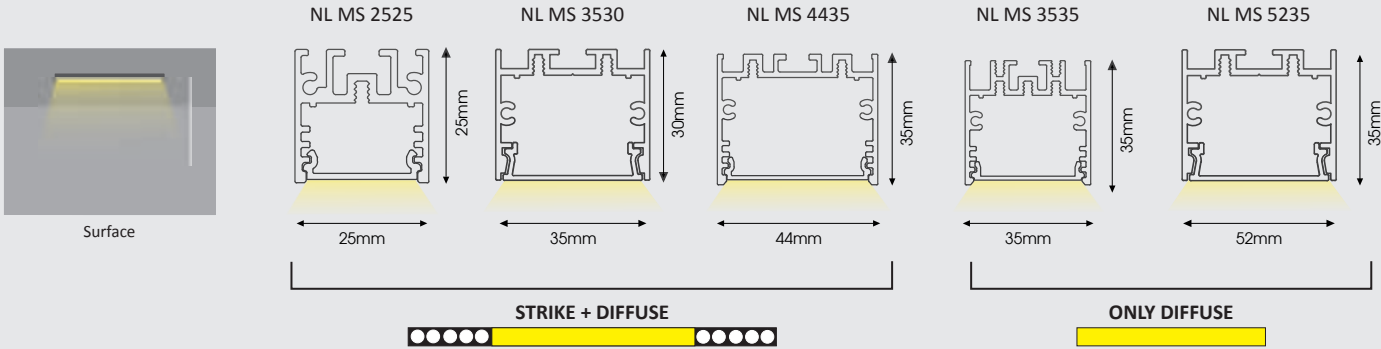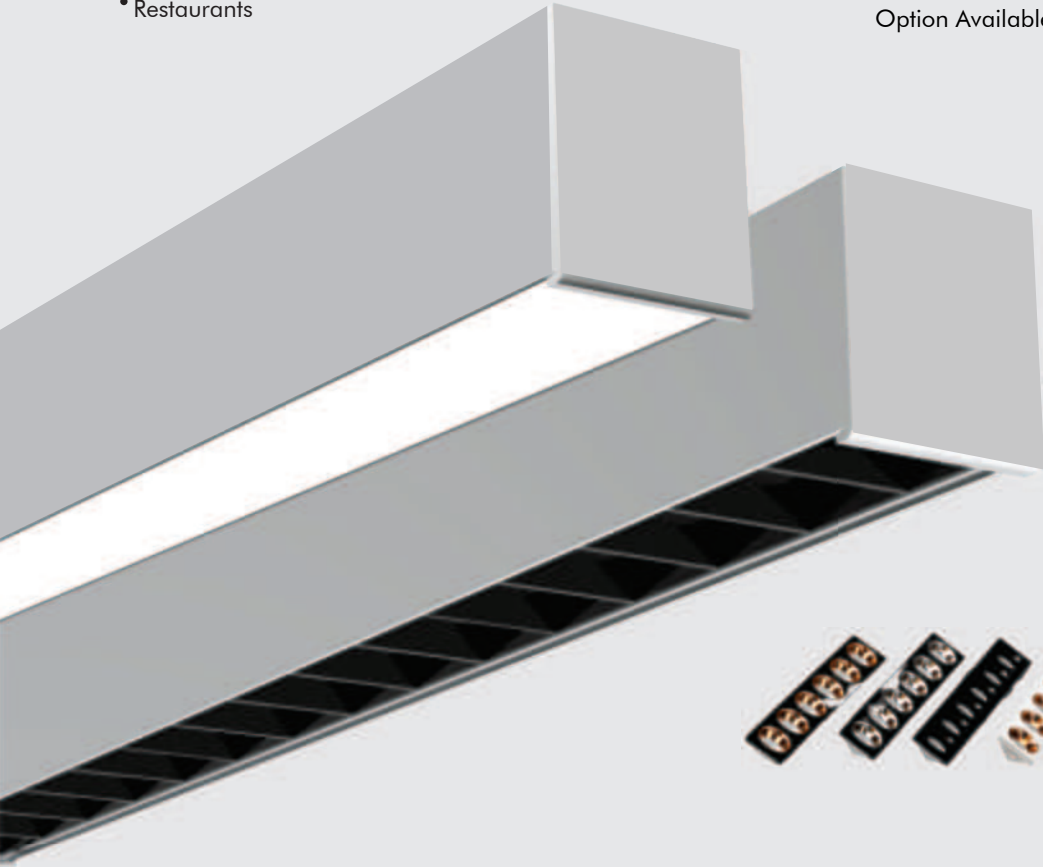

NL MS 6535

Recessed

Features

- Aluminum Extruded Housing.
 - Dot Less Diffuser.
 - Flexibity In Customize As Per Site Requirement.
 - Tunable White Versions Available Over RF Or Bluetooth.
 - High CRI & CCT Available On Request.
 - Integrated Power Supply.

Applications

- Corporate Offices
 - Malls
 - Reception Area
 - Corridors
 - Residential Lighting
 - Restaurants





















Housing	: Aluminium Extrusion
Diffuser	: Diffuser (PMMA)
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K / TW
Driver	: Fulham / Osram
Wattage	: 8W/Ft
Mounting Type	: Recessed
Dimensions	: Length: 4ft/8ft
Option Available	: Customize Length

Mounting Accessories

C-Clamp

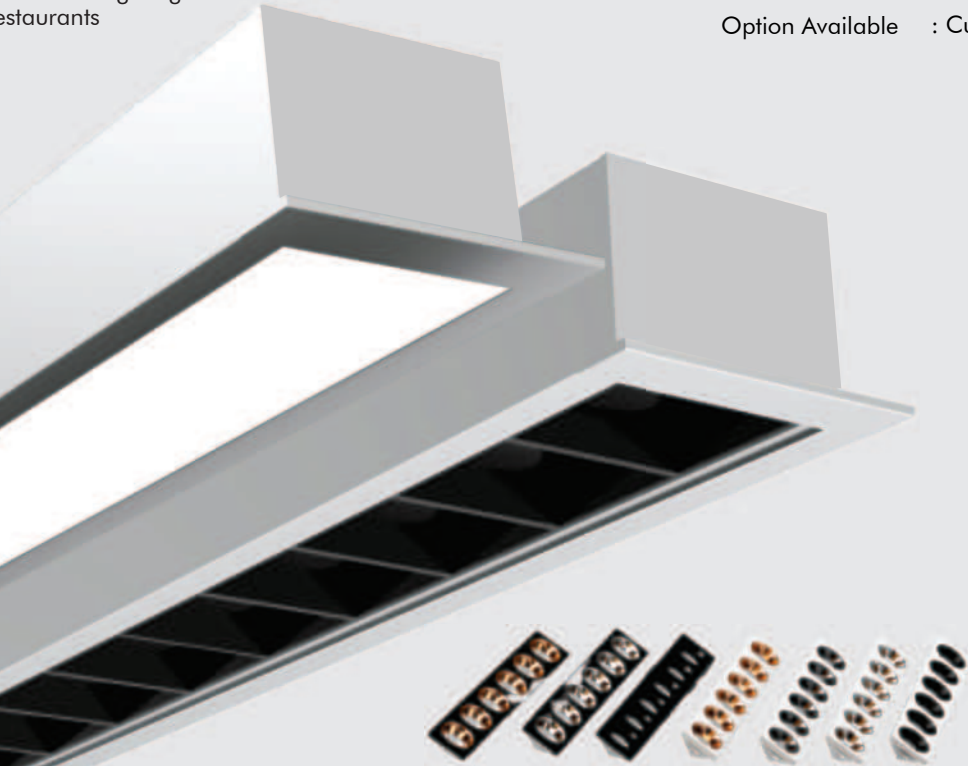

Recessed

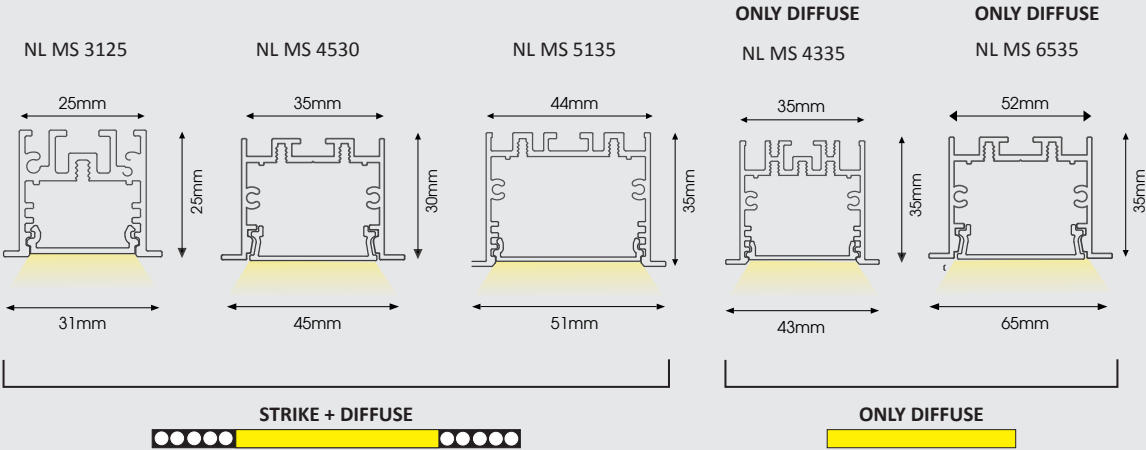

NL MS 5050

Deep Recessed

Features


- Aluminum Extruded Housing.
- Dot Less Diffuser.
- Flexibility In Customize As Per Site Requirement.
- Tunable White Versions Available Over RF Or Bluetooth.
- High CRI & CCT Available On Request.
- Integrated Power Supply.

Applications

- Corporate Offices
- Malls
- Reception Area
- Corridors
- Residential Lighting
- Restaurants





Housing	: Aluminium Extrusion
Diffuser	: Diffuser (PMMA)
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K / TW
Driver	: Fulham / Osram
Wattage	: 8W/Ft
Mounting Type	: Recessed
Dimensions	: Length: 4ft/8ft
Option Available	: Customize Length

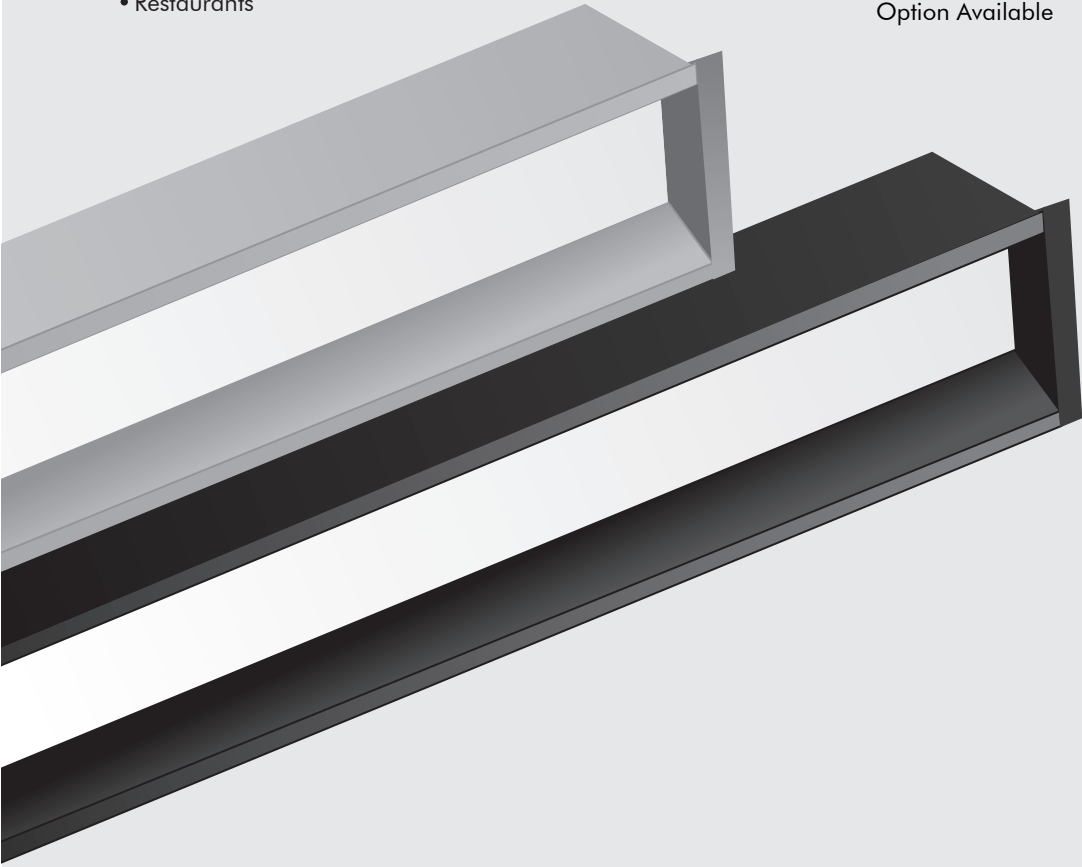

Mounting Accessories

C-Clamp



NL MS 3570

Suspended/Surface

Features

- Aluminum Extruded Housing.
- Dot Less Diffuser.
- Flexibility In Customize As Per Site Requirement.
- Tunable White Versions Available Over RF Or Bluetooth.
- High CRI & CCT Available On Request.
- Integrated Power Supply.



Applications

- Corporate Offices
- Malls
- Reception Area
- Corridors
- Residential Lighting
- Restaurants



Housing	: Aluminium Extrusion
Diffuser	: Diffuser (PMMA)
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K / TW
Driver	: Fulham / Osram
Wattage	: 8W/Ft
Mounting Type	: Surface / Suspended
Dimensions	: Length: 4ft/8ft
Option Available	: Customize Length

Hanging Accessories

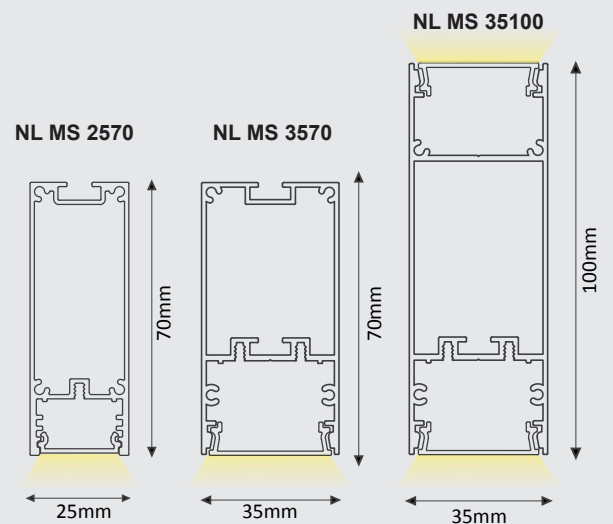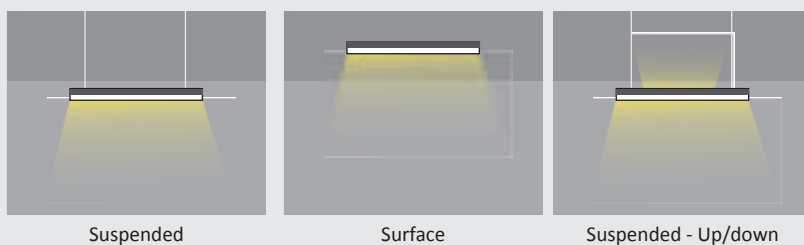

NL MS 4475

Suspended




Features

- Aluminum Extruded Housing.
- Dot Less Diffuser.
- Flexibility In Customize As Per Site Requirement.
- Tunable White Versions Available Over RF Or Bluetooth.
- High CRI & CCT Available On Request.
- Integrated Power Supply.

Applications

- Corporate Offices
- Malls
- Reception Area
- Corridors
- Residential Lighting
- Restaurants


Housing	: Aluminium Extrusion
Diffuser	: Diffuser (PMMA)
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K / TW
Driver	: Fulham / Osram
Wattage	: 9W/Ft
Mounting Type	: Suspended
Dimensions	: Length: 4ft/8ft
Option Available	: Customize Length

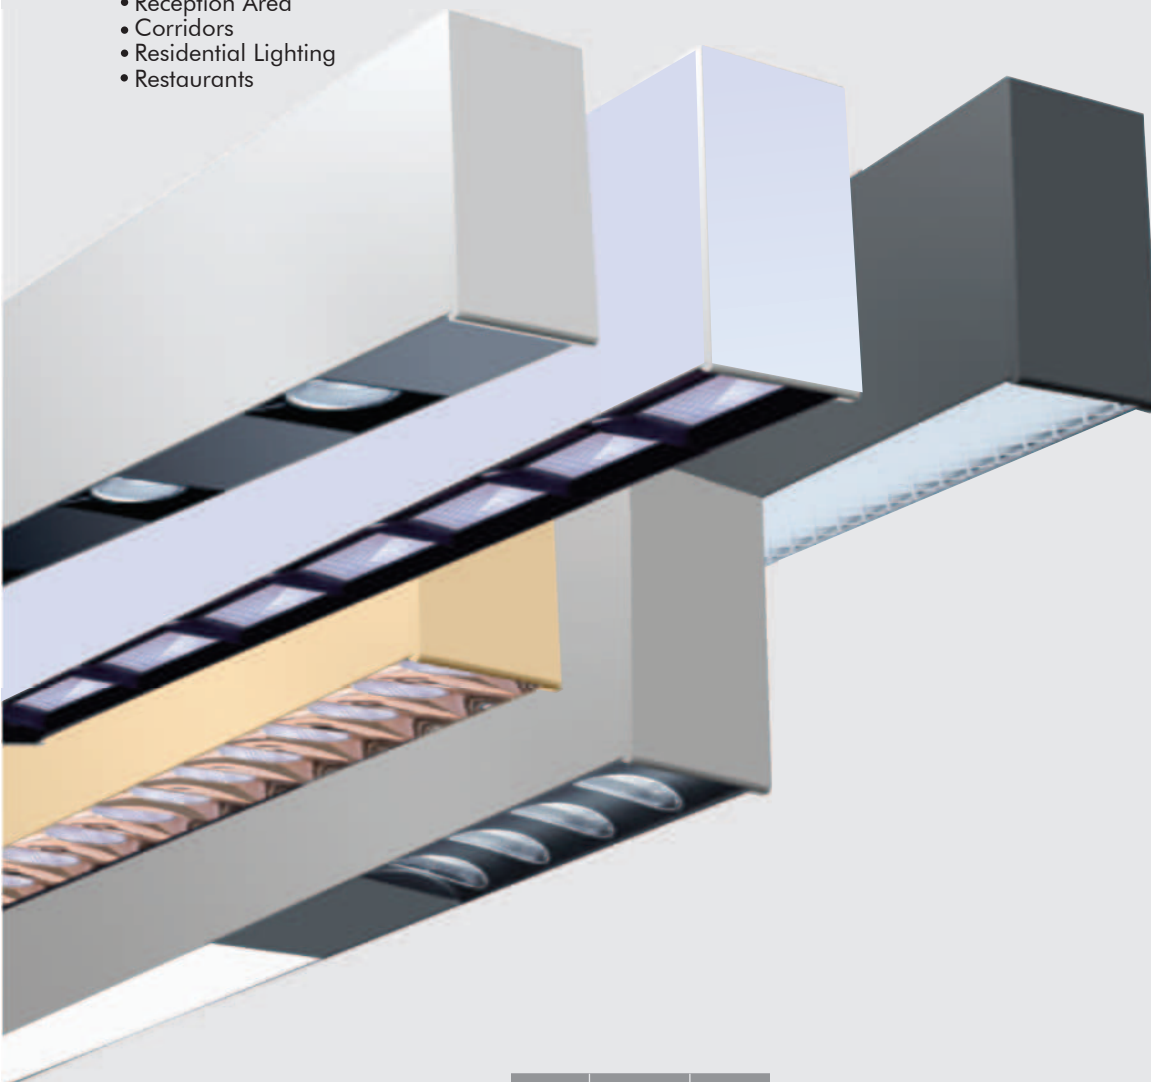


Accessories
Hanging



NL MS 4475



Suspended

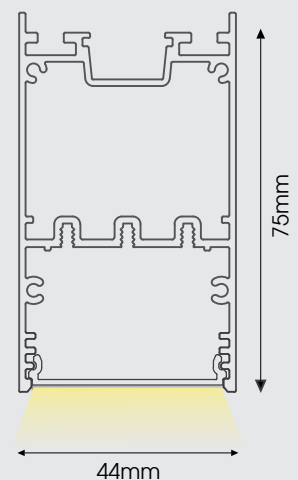

NL MS 5275

Suspended

Features


- Aluminum Extruded Housing.
- Dot Less Diffuser.
- Flexibility In Customize As Per Site Requirement.
- Tunable White Versions Available Over RF Or Bluetooth.
- High CRI & CCT Available On Request.
- Integrated Power Supply.

Applications


- Corporate Offices
- Malls
- Reception Area
- Corridors
- Residential Lighting
- Restaurants



Housing	: Aluminium Extrusion
Diffuser	: Diffuser (PMMA)
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K / TW
Driver	: Fulham / Osram
Wattage	: 36W/4Ft
Mounting Type	: Suspended
Dimensions	: Length: 4ft/8ft
Option Available	: Customize Length

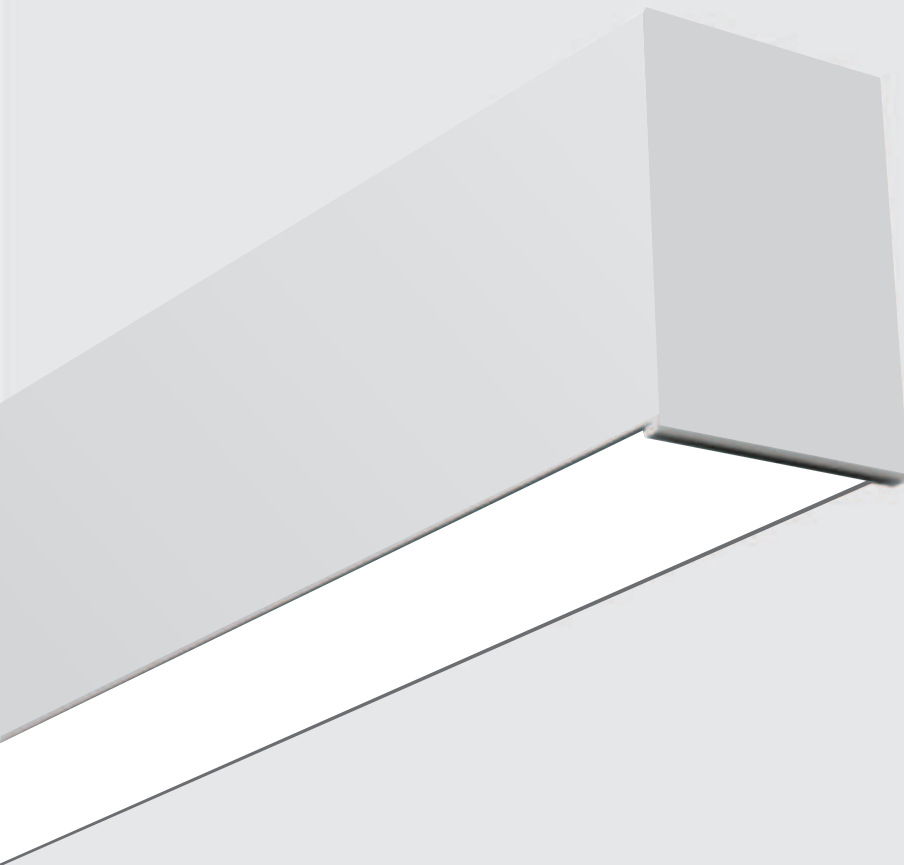


Accessories
Hanging

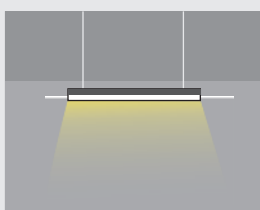

Suspended

NL MS 5275

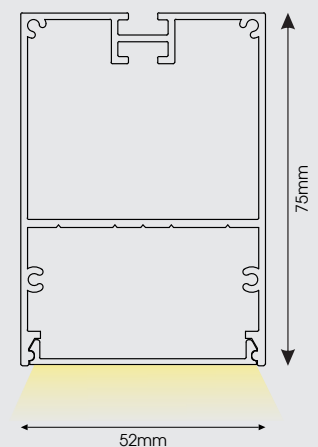

NL MS 5577

Suspended/Surface

Features


- Aluminum Extruded Housing.
- Dot Less Diffuser.
- Flexibility In Customize As Per Site Requirement.
- Tunable White Versions Available Over RF Or Bluetooth.
- High CRI & CCT Available On Request.
- Integrated Power Supply.

Applications






- Corporate Offices
- Malls
- Reception Area
- Corridors
- Residential Lighting
- Restaurants



Housing	: Aluminium Extrusion
Diffuser	: Diffuser (PMMA)
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K / TW
Driver	: Fulham / Osram
Wattage	: 9W/Feet
Mounting Type	: Suspended/Surface
Dimensions	: Length: 4ft/8ft
Option Available	: Customize Length

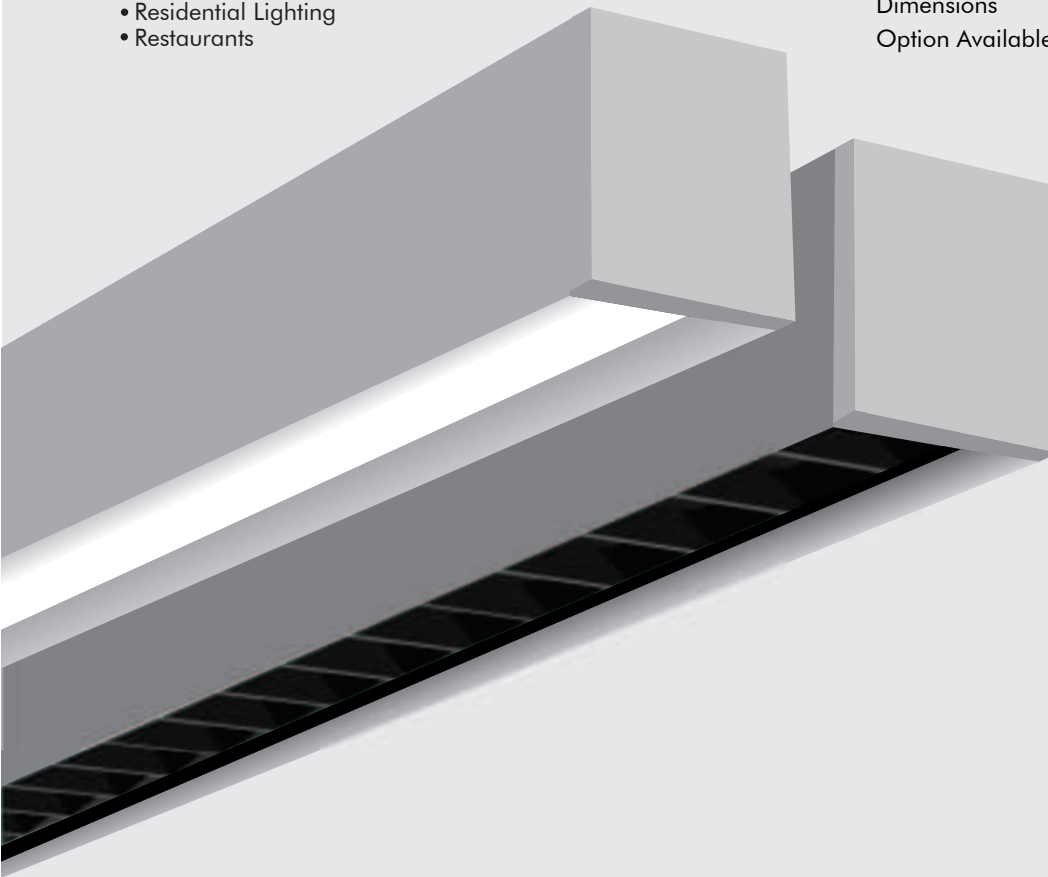

Accessories
Hanging

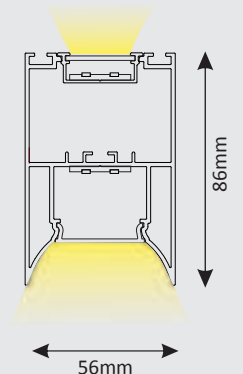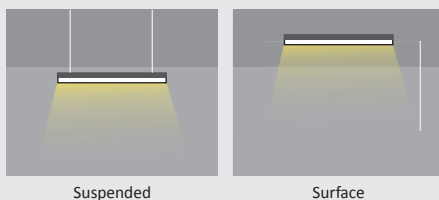

NL CUR-45

Curve Suspended

Features

- Aluminum Extruded Housing.
- Dot Less Diffuser.
- Flexibility In Customize As Per Site Requirement.
- Tunable White Versions Available Over RF Or Bluetooth.
- High CRI & CCT Available On Request.

Applications

- Corporate Offices
- Malls
- Reception Area
- Corridors
- Residential Lighting
- Restaurants



Housing	: Aluminium Extrusion
Diffuser	: Polycarbonate
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K / TW
Beam Angle	: 45° / 75°
Driver	: Fulham / Osram
Wattage	: 9W/Feet
Mounting Type	: Suspended
Dimensions	: Length: 4ft/8ft
Option Available	: Customize Length




UGR <9



Accessories
Hanging



Suspended



NL CUR 4078

Suspended

Features


- Aluminum Extruded Housing.
- Dot Less Diffuser.
- Flexibility In Customize As Per Site Requirement.
- Tunable White Versions Available Over RF Or Bluetooth.
- High CRI & CCT Available On Request.
- Integrated Power Supply.

Applications


- Corporate Offices
- Malls
- Reception Area
- Corridors
- Residential Lighting
- Restaurants




Housing	: Aluminium Extrusion
Diffuser	: PC
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K / TW
Beam Angle	: 45° / 75°
Driver	: Fulham / Osram
Wattage	: 9W/Feet
Mounting Type	: Suspended
Dimensions	: Length: 4ft/8ft
Option Available	: Customize Length

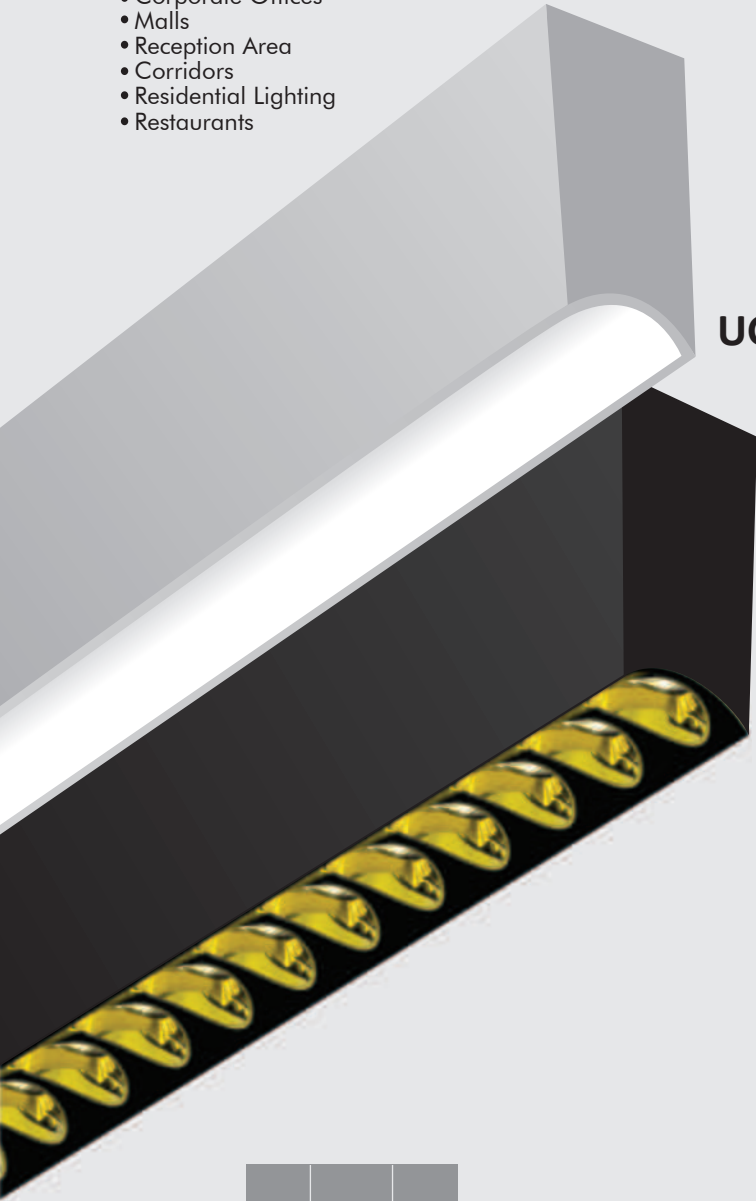

Accessories
Hanging



Suspended

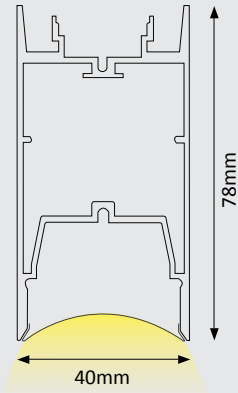

Profile Option

With Different Texture



Bronze

Brushed Silver

Brushed Gold



Solid Wood Grain

Paradise Rosewood

Royal Teak



Hermes Orange

Matte Black

Matte White





NL CUR 5275

Suspended/Surface

Features




- Aluminum Extruded Housing.
- Dot Less Diffuser.
- Flexibility In Customize As Per Site Requirement.
- Tunable White Versions Available Over RF Or Bluetooth.
- High CRI & CCT Available On Request.
- Integrated Power Supply.

Applications

- Corporate Offices
- Malls
- Reception Area
- Corridors
- Residential Lighting
- Restaurants



Housing	: Aluminium Extrusion
Diffuser	: Diffuser (PMMA)
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K / TW
Driver	: Fulham / Osram
Wattage	: 9W/Feet
Mounting Type	: Suspended / Surface
Dimensions	: Length: 4ft/8ft
Option Available	: Customize Length

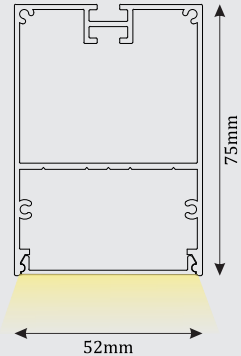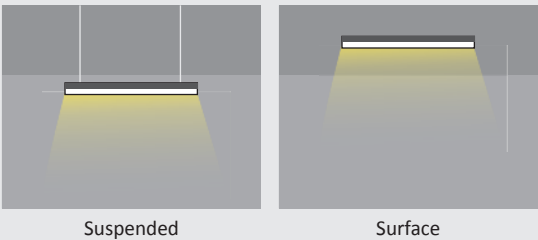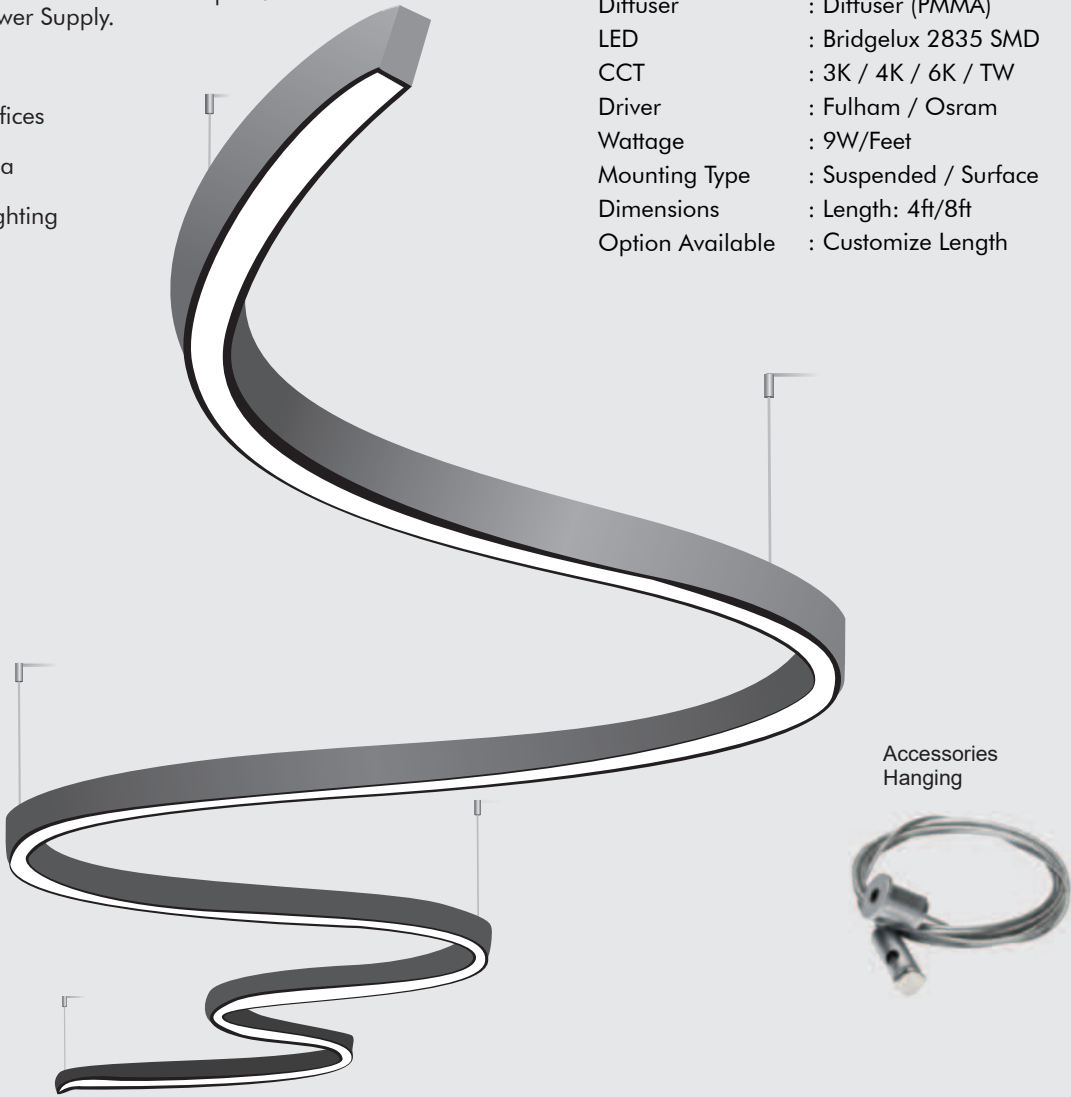

Curve Profile

Recessed

Features



- Aluminum Extruded Housing.
- Dot Less Diffuser.
- Flexibility In Customize As Per Site Requirement.
- Tunable White Versions Available Over RF Or Bluetooth.
- High CRI & CCT Available On Request.

Applications


- Corporate Offices
- Malls
- Reception Area
- Corridors
- Residential Lighting
- Restaurants




Housing	: Aluminium Extrusion
Diffuser	: Diffuser (PMMA)
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K / TW
Driver	: Fulham / Osram
Wattage	: 9W/Feet
Mounting Type	: Recessed
Dimensions	: Length: 4ft/8ft
Option Available	: Customize Length

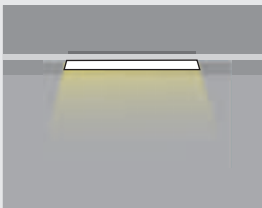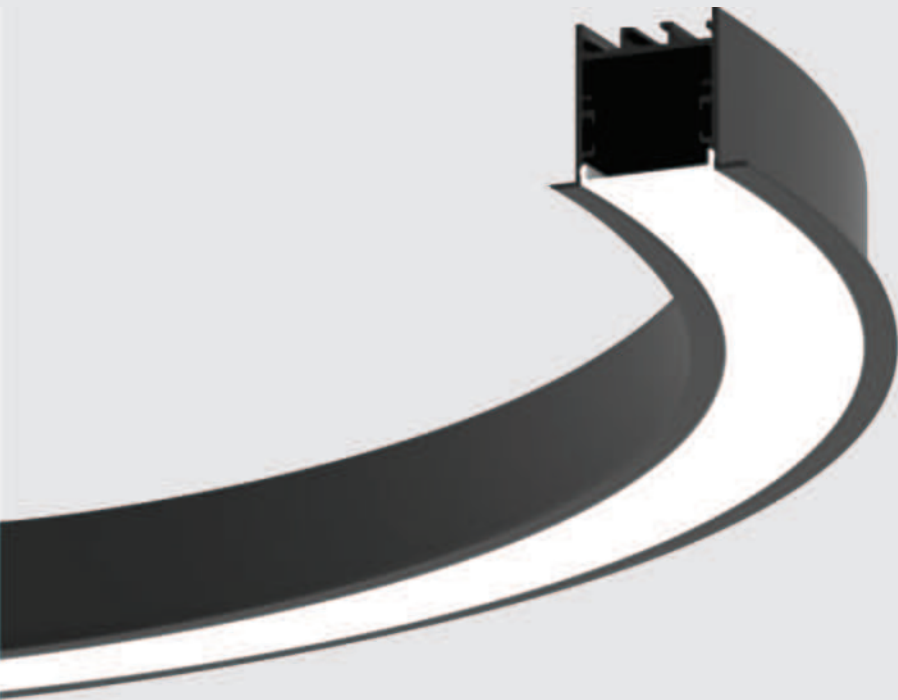

Recessed



Curve Profile

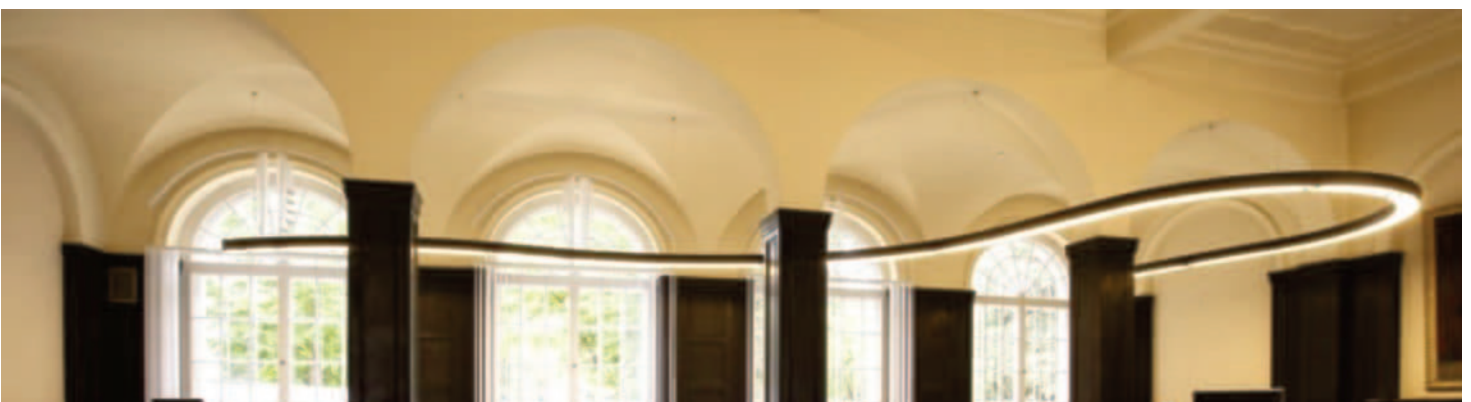



Venus

Drum Profile

Recessed/Surface/Suspended

Features

- Aluminum Extruded Housing Suspended Version Available.
- Dot Less Diffuser.
- Flexibity In Customize As Per Site Requirement.
- Quick & Simple Installation.
- Provides Even, Glare Free LED illuminations.

Applications

- Corporate Offices
- Malls
- Reception Area
- Corridors
- Residential Lighting
- Restaurants



NL 5086-A


 IP20
RATED


 ≥ 80 CRI


 Dimming
1-10V/0-10V
DALI


 SMD LED


 2
Years
Warranty


 BIS


 Available Finish

Housing	: Aluminium Extrusion
Diffuser	: Diffuser (PMMA)
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K
Driver	: Fulham / Osram
Wattage	: 30W / 40W / 60W / 72W / 100W
Mounting Type	: Suspended / Surface / Recessed
Dimensions	: Dia: 300mm 450mm 600mm 900mm 1200mm
	: Height: 70mm
Option Available	: Customize Length




NL 5086-B (Surface)



NL 5086-C (Recessed)

Accessories
Hanging

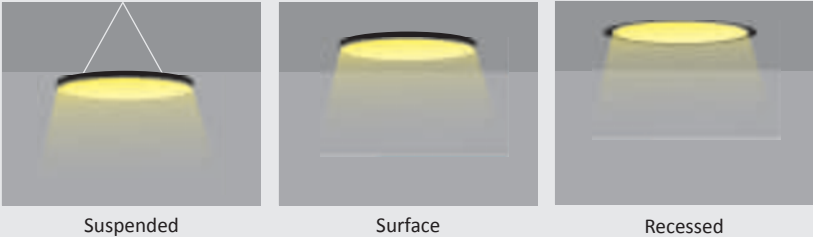



Venus

Hexa-Drum Profile

Recessed/Surface/Suspended

Features

- Aluminum Extruded Housing Suspended Version Available.
- Dot Less Diffuser.
- Flexibity In Customize As Per Site Requirement.
- Quick & Simple Installation.
- Provides Even, Glare Free LED illuminations.

Applications

- Corporate Offices
- Malls
- Reception Area
- Corridors
- Residential Lighting
- Restaurants



IP20
RATED



≥ 80 CRI



Dimming
1-10V/10W DALI



SMD LED



2
Years
Warranty




BIS



Available Finish

Housing	: Aluminium Extrusion
Diffuser	: Diffuser (PMMA)
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K
Driver	: Fulham / Osram
Wattage	: 30W / 40W / 60W / 72W / 100W
Mounting Type	: Suspended / Surface / Recessed
Dimensions	: Dia: 300mm 450mm 600mm 900mm 1200mm
	: Height: 70mm
Option Available	: Customize Length

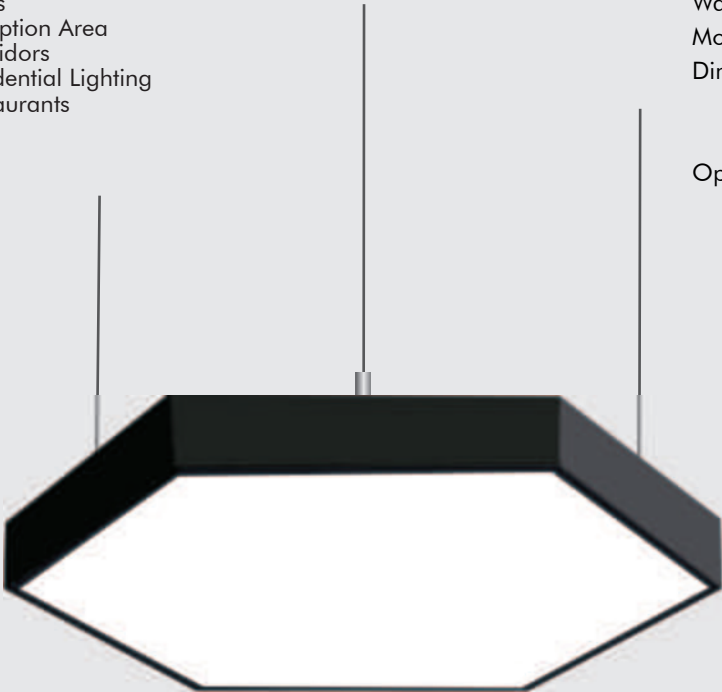


SUSPENDED



SURFACE

Accessories
Hanging

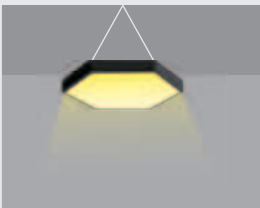

Suspended



Surface



Nebula

Donut Profile

(Surface/Suspended)

Features

- Aluminum Extruded Housing Suspended Version Available.
- Dot Less Diffuser.
- Flexibility In Customize As Per Site Requirement.
- Quick & Simple Installation.
- Provides Even, Glare Free LED illuminations.

Applications

- Corporate Offices
- Malls
- Reception Area
- Corridors
- Residential Lighting
- Restaurants



NL 5085-A



NL 5085-B (Surface)



NL 5085-C



Housing	: Aluminium Extrusion
Diffuser	: Diffuser (PMMA)
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K
Driver	: Fulham / Osram
Wattage	: 30W / 40W / 55W / 72W / 96W
Mounting Type	: Suspended / Surface
Dimensions	: Dia: 300mm 450mm 600mm 900mm 1200mm
	: Height: 70mm
Option Available	: Customize Length



Suspended



Surface

Accessories Hanging





Curved End

Suspended/Surface

Features



- Aluminum Extruded Housing.
- Dot Less Diffuser.
- Flexibity In Customize As Per Site Requirement.
- Tunable White Versions Available Over RF Or Bluetooth.
- High CRI & CCT Available On Request.
- Integrated Power Supply.

Applications

- Corporate Offices
- Malls
- Reception Area
- Corridors
- Residential Lighting
- Restaurants




Housing	: Aluminium Extrusion
Diffuser	: Diffuser (PMMA)
LED	: Bridgelux 2835 SMD
CCT	: 3K / 4K / 6K
Driver	: Fulham / Osram
Wattage	: 9W/Ft
Mounting Type	: Suspended / Surface
Dimensions	: 4Ft / 8Ft
Option Available	: Customize Length

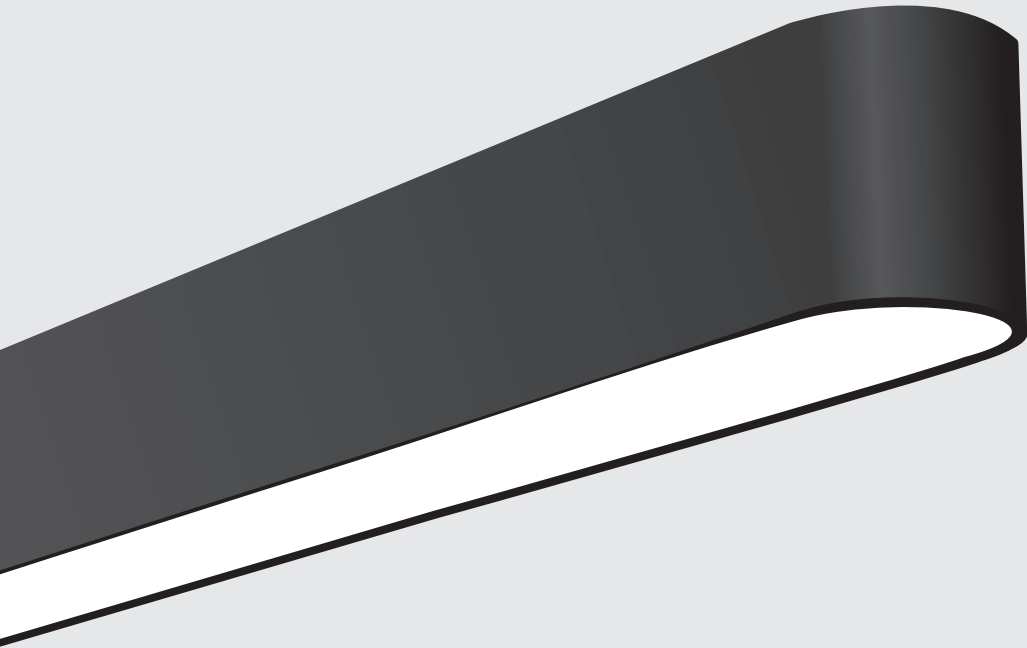

Suspended



Surface







Acoustic Profile Light



What is Acoustics?

*Acoustic products are made from 100% polyethylene terephthalate(PET), with 50% post consumer recycled material.

*PET is a green product manufactured free of added chemicals, binders, adhesives and dyes.

*The product is very adaptable, it can be cut, notched or trimmed for installation purpose.

*Nearly every environment interacts with sound, PET can achieve a triple purpose functionally acoustic in nature, enhanced design of any space and environmental consciousness.

Perfect Sound Aborption





Abstract Profile Light


Features

- Aluminum Extruded Housing.
- Dot Less Diffuser.
- Flexibility In Customize As Per Site Requirement.
- Tunable White Versions Available Over RF Or Bluetooth.
- High CRI & CCT Available On Request.
- Integrated Power Supply.



Applications

- Corporate Offices
- Malls
- Reception Area
- Corridors
- Residential Lighting
- Restaurants

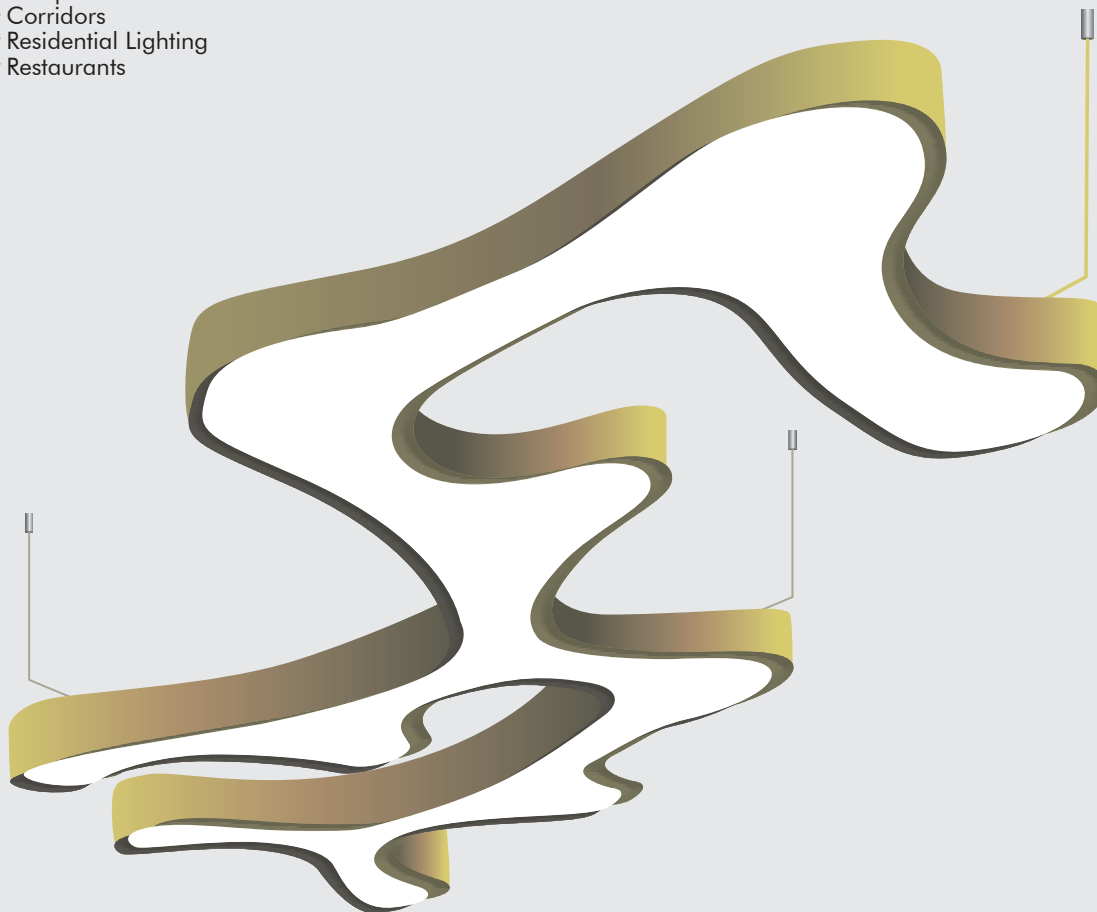

NL 3570 ML
(Diffuser- Milky)

NL 3570 PR
(Diffuser- Prismatic)





OUTDOOR





Common Lighting Distribution Types for Commercial and Industrial Use

At Nirvana Light, we provide lighting solutions tailored to your needs. Below is a simple overview of the five most common lighting distribution types, including Type I and Type II, alongside the widely used Type III, Type IV, and Type V. These patterns are designed to light up everything from walkways to large parking lots with efficiency and reliability.

Type I: Narrow and Bidirectional

What it does: Creates a narrow, two-way beam that spreads light evenly on both sides of the fixture.

Best for: Walkways, sidewalks, or paths where the light is placed in the center of the area.

Why choose it: Perfect for long, narrow spaces needing balanced lighting on both sides.




Type II: Slightly Wider Reach

What it does: Spreads light in a slightly wider, linear pattern compared to Type I.

Best for: Narrow roadways, alleys, or side streets.

Why choose it: Great for areas where you need a bit more coverage than Type I but still want a focused beam.




Type III: Wide and Versatile

What it does: Spreads light widely in a forward and side-to-side pattern.

Best for: Parking lots, driveways, and roadways.

Why choose it: The go-to choice for most projects because it covers large areas evenly and efficiently.



Type IV: Focused and Forward

What it does: Sends light in a narrow, forward beam with minimal light spilling backward.

Best for: Building perimeters, facades, or areas needing targeted lighting.

Why choose it: Ideal for specific spots where you want light to shine outward without wasting it behind the fixture.




Type V: All-Around Coverage

What it does: Spreads light evenly in a circular or rounded square shape around the fixture.

Best for: Large open areas like big parking lots or intersections.

Why choose it: Perfect when you need consistent light in all directions for maximum coverage.



With Nirvana Light, our Type I, Type II, Type III, Type IV, and Type V fixtures deliver bright, efficient lighting tailored to your commercial or industrial space.



Outdoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life



Gardo Spot Light

Designed to illuminate
for Landscape, Squares,
Facade & high comfort,
efficiency with lighting
flexibility.

Gardo

Spot Light



Standard Finish



Dark Grey

Customise Finish



Rustic Brown



Silver Grey



White



Plant Green



Black



Customized Color available on Order

Gardo

Spot Light

Gardo is a family of high performance protections available in round in four different sizes, and Square in three different sizes.

It expresses the synthesis of the essential characteristics of a professional spotlight: design, strength, precision, visual comfort, high efficiency & luminous flexibility.

Ideal for illumination of plants, bushes, trees, building facade, monuments, statues, sculptures & many other lighting applications.



NL 4305



NL 4306



NL 4309



NL 4301



NL 4302



NL 4310



NL 4307



NL 4308

Internal Accessories



Honeycomb Reflector

External Accessories



Tree Strap For Surface




Hood



IP67 Cable Gland -PG7



IP67 Cable Connector

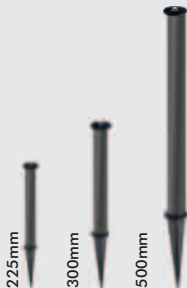

Earth Spike



Gardo

Spot Light



Features


- Aluminum Die cast body.
- Electrostatic Pure polyester powder coated.
- Non-Corrosive SS fasteners and toughened glass.
- PMMA optic - Lenses and PC reflector for better beaming control.
- Available in three different beam angles to meet the desired directional spot and flood light illumination affect.
- High Power LED used having narrow, medium, wide beam options.
- Additional accessories like Anti glare hood, Extra-long earth spike, tree strap, Honey comb louver, IP68 cable gland.
- Product supplied pre-wired cable gland compliance to IP67 rating.

Applications

- Landscape
- Column
- Pillars
- Hardscape
- Uplighter



NL 4305

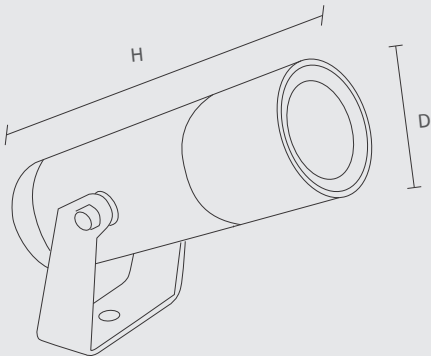

Specification					
Model	NL 4305	NL 4306	NL 4309	NL 4301	NL 4302
Power (W)	3W/5W	10W	8W	11W	15W/20W
Color Temperature (CCT)	3000K	3000K	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Lens	Reflector	Reflector	Reflector
Beam Angle	25°	25°	15°/ 25°/ 38°/ 60°	60°	55°/ 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 35mm/ H : 105mm	D : 60mm/ 75mm	D : 60mm/ H : 105mm	D : 62mm/ H : 145mm	D : 82mm/ H : 175mm

Outdoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life



Gardo

Landscape Lighting

Designed to illuminate
for Landscape, Squares,
Facade & high comfort,
efficiency with lighting
flexibility.

Gardo

Landscape Lighting



Features


- Aluminum Die cast body.
- Electrostatic Pure polyester powder coated.
- Non-Corrosive SS fasteners and toughened glass.
- PMMA optic - Lenses and PC reflector for better beaming control.
- Available in three different beam angles to meet the desired directional spot and flood light illumination affect.
- COB LED used having narrow, medium, wide beam options.
- Additional accessories like Anti glare hood, Extra-long earth spike, tree strap, Honey comb louver, IP68 cable gland.
- Product supplied pre-wired cable gland compliance to IP67 rating.

Applications

- Landscape
- Column
- Pillars
- Hardscape
- Uplighter



NL 4310

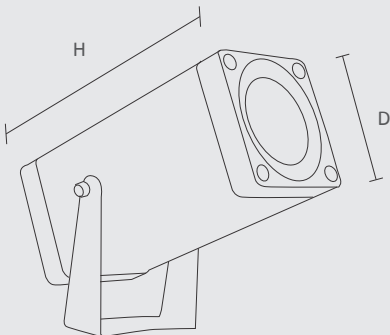

Specification			
Model	NL 4310	NL 4307	NL 4308
Power (W)	10W	8W/11W	15W/20W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	25°	60°	55°/ 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60x60mm/ H : 105mm	D : 62x62mm/ H : 145mm	D : 82x82mm/ H : 175mm




Outdoor Architectural Lighting

Kubo-Wall

One Way Light

The Aluminum Die-Cast Body Ensures a durable and robust construction. Hi-Power SMD LED: Provides an extra-wide illumination angle for broad and effective lighting coverage. Non-Corrosive SS Fasteners: Guarantees long-term reliability and resistance to rust and corrosion.

Toughened Glass: Adds durability and impact resistance to the light fixture. Pre-Wired Cable Gland: Compliant with IP67 rating for excellent protection against dust and water ingress. Silicon Gasket: Enhances weather resistance and ensures a secure seal, preventing moisture from entering the fixture.

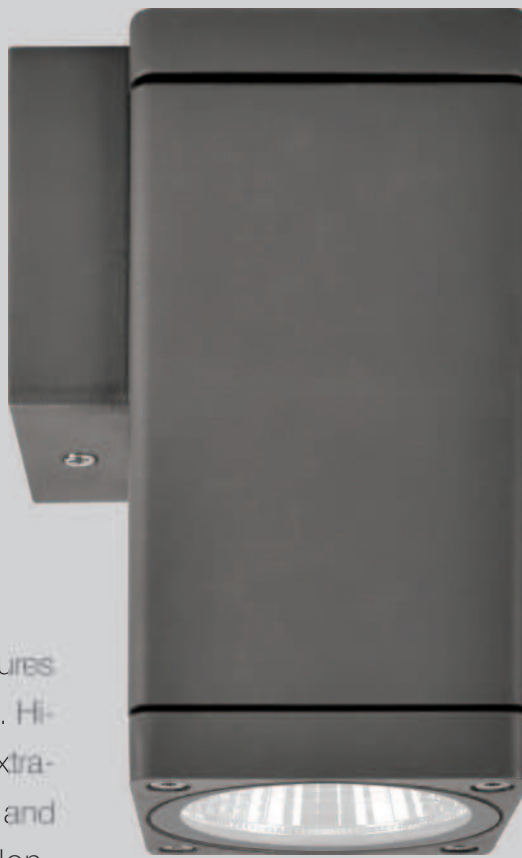

Kubo-Wall

One Way Light

The KUBO Wall One Way Light is a sleek, wall-mounted luminary designed specifically for facade lighting. Key features include Up/Down Lighting Effects: Provide versatile illumination with options for both upward and downward light distribution. Aesthetically Designed: Offers a modern and elegant look, enhancing the visual appeal of any facade. Fully Shielded Light Source: Ensures directed lighting while minimizing glare and light spill. High Luminous Efficiency: Delivers bright, effective illumination with minimal energy consumption. Longer Product Life: Designed for durability and extended use, reducing the need for frequent replacements. The KUBO is ideal for highlighting building exteriors and creating stylish lighting effects on walls.

Aluminum Die-Cast Body: Ensures a durable and robust construction. Hi-Power SMD LED: Provides an extra-wide illumination angle for broad and effective lighting coverage. Non-Corrosive SS Fasteners: Guarantees long-term reliability and resistance to rust. Toughened Glass: Adds durability and impact resistance to the light fixture. Pre-Wired Cable Gland: Compliant with IP67 rating for excellent protection against dust and water ingress. Silicon Gasket: Enhances weather resistance and ensures a secure seal, preventing moisture from entering the fixture. These features collectively ensure that the Cubic Wall Up/Down Light is both functional and resilient, ideal for various outdoor lighting applications.



NL 4121



NL 4032



NL 4042



NL 4132



NL 4135



NL 4138



NL 4124



NL 4035



NL 4045

Kubo-Wall

One Way Light



Features


- Aluminium Die Cast body
- PC Reflector & Len’s for better beam control
- COB LED used having narrow, medium, wide beam options.
- Non-corrosive SS fasteners and toughened glass.
- Pre-Wired Cable Gland

Applications

- Residential
- Building facade
- Commercial centres
- Passages
- High light the columns



NL 4042

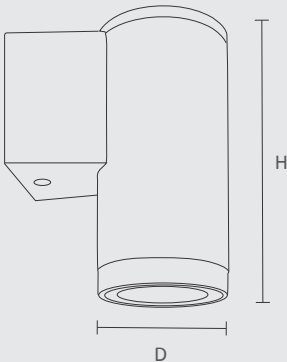

Specification			
Model	NL 4121	NL 4032	NL 4042
Power (W)	6W	8W	15W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	25°	25°	55°/ 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60mm/ H : 100mm	D : 60mm H : 120mm	D : 82mm/ H : 160mm

Kubo-Wall

One Way Light



Features


- Aluminium Die Cast body
- PC Reflector & Len’s for better beam control
- COB LED used having narrow, medium, wide beam options.
- Non-corrosive SS fasteners and toughened glass.
- Pre-Wired Cable Gland

Applications

- Residential
- Building facade
- Commercial centres
- Passages
- High light the columns



NL 4035

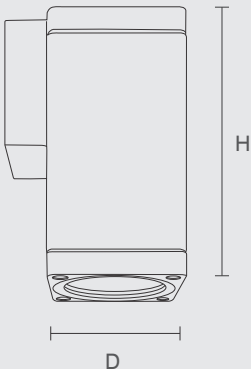

Specification			
Model	NL 4124	NL 4035	NL 4045
Power (W)	6W	8W	15W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	25°	60°	55°/ 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60x60mm/ H : 100mm	D : 62x62mm/ H : 140mm	D : 82x82mm/ H : 175mm

Kubo-Wall

One Way Light



Features


- Aluminium Die Cast body
- PC Reflector & Len’s for better beam control
- COB LED used having narrow, medium, wide beam options.
- Non-corrosive SS fasteners and toughened glass.
- Pre-Wired Cable Gland

Applications

- Residential
- Building facade
- Commercial centres
- Passages
- High light the columns




NL 4135

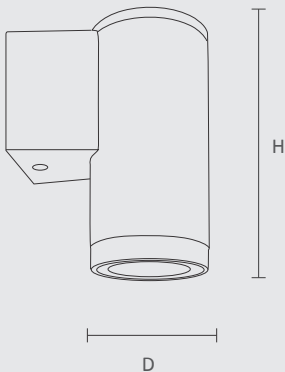

Specification			
Model	NL 4132	NL 4135	NL 4138
Power (W)	18W	24W	32W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Reflector	Reflector	Reflector
Beam Angle	55°/ 60°	55°/ 60°	55°/ 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 100mm H : 200mm	D : 140mm H : 250mm	D : 165mm H : 300mm



Outdoor Architectural Lighting

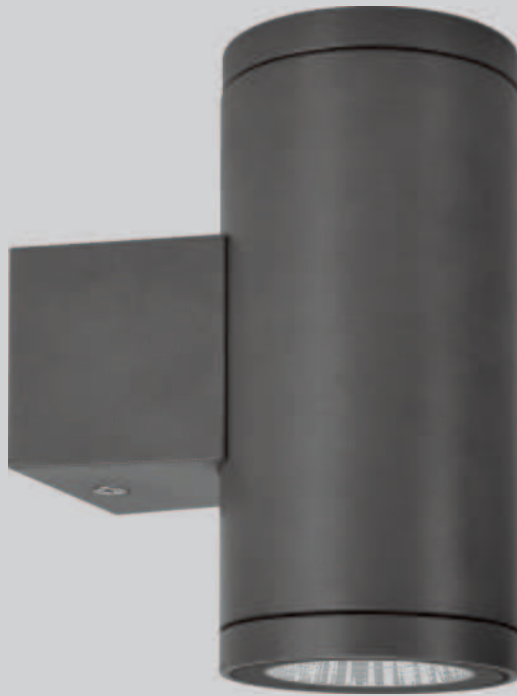

Kubic-Wall

Up-Down Light

The Aluminum Die-Cast Body Ensures a durable and robust construction. Hi-Power SMD LED: Provides an extra-wide illumination angle for broad and effective lighting coverage. Non-Corrosive SS Fasteners: Guarantees long-term reliability and resistance to rust and corrosion.

Toughened Glass: Adds durability and impact resistance to the light fixture. Pre-Wired Cable Gland: Compliant with IP67 rating for excellent protection against dust and water ingress. Silicon Gasket: Enhances weather resistance and ensures a secure seal, preventing moisture from entering the fixture.

Kubic-Wall

Up-Down Light

The Kubic Wall Up/Down Light includes the following features:

Aluminum Die-Cast Body: Ensures a durable and robust construction. Hi-Power SMD LED: Provides an extra-wide illumination angle for broad and effective lighting coverage. Non-Corrosive SS Fasteners: Guarantees long-term reliability and resistance to rust and corrosion.

Toughened Glass: Adds durability and impact resistance to the light fixture. Pre-Wired Cable Gland: Compliant with IP67 rating for excellent protection against dust and water ingress. Silicon Gasket: Enhances weather resistance and ensures a secure seal, preventing moisture from entering the fixture.

The Kubic Wall Up/Down Light Ideal for enhancing the lighting in residential gardens & yards, providing both functional illumination & aesthetic appeal. Driveways and Entrances: Ensures safe and attractive lighting for driveways and home entrances, enhancing visibility & security.



NL 4122



NL 4033



NL 4043



NL 4125



NL 4036



NL 4046



NL 4133



NL 4136



NL 4139

Kubic-Wall

Up-Down Light



Features


- Aluminium Die Cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners and toughened glass.
- Toughened Glass
- Silicon gasket

Applications

- Residential: Garden and Yard Lighting
- Building Facade: Architectural Highlighting
- Passages: Walkways and Corridors
- Public Spaces
- Pathways Garden and Landscape Paths
- Sculptures and Structures: Artistic Lighting



NL 4033

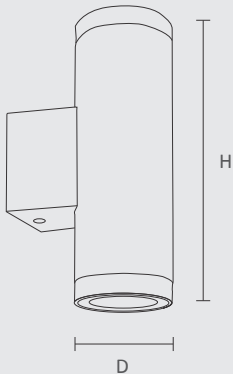

Specification			
Model	NL 4122	NL 4033	NL 4043
Power (W)	2x6W	2x6W	2x13W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	25°	38°	55°/ 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60mm/ H : 125mm	D : 60mm/ H : 180mm	D : 82mm/ H : 215mm

Kubic-Wall

Up-Down Light



Features


- Aluminium Die Cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners and toughened glass.
- Toughened Glass
- Silicon gasket

Applications

- Residential: Garden and Yard Lighting
- Building Facade: Architectural Highlighting
- Passages: Walkways and Corridors
- Public Spaces
- Pathways Garden and Landscape Paths
- Sculptures and Structures: Artistic Lighting



NL 4036

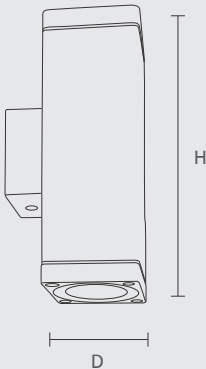

Specification			
Model	NL 4125	NL 4036	NL 4046
Power (W)	2x6W	2x6W	2x13W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	25°	60°	55°/ 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60x60mm H : 125mm	D : 62x62mm H : 175mm	D : 82x82mm H : 215mm

Kubic-Wall

Up-Down Light



Features


- Aluminium Die Cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners and toughened glass.
- Toughened Glass
- Silicon gasket

Applications

- Residential: Garden and Yard Lighting
- Building Facade: Architectural Highlighting
- Passages: Walkways and Corridors
- Public Spaces
- Pathways Garden and Landscape Paths
- Sculptures and Structures: Artistic Lighting



NL 4136

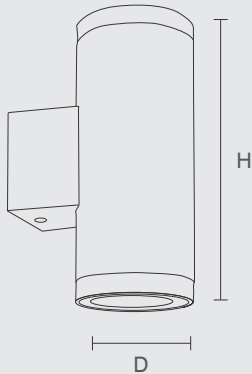

Specification			
Model	NL 4133	NL 4136	NL 4139
Power (W)	2x18W	2x24W	2x32W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	55°/ 60°	55°/ 60°	55°/ 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 100mm/ H : 350mm	D : 140mm/ H : 400mm	D : 165mm/ H : 500mm



Outdoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life



Okio

Ceiling Surface Light

The OKIO Ceiling Surface Light boasts several high-quality features designed to enhance its performance, durability, and versatility

Okio

Ceiling Surface Light



NL 4031



NL 4041

The OKIO Ceiling Surface Light is a type of modern lighting fixture designed to be mounted directly onto the ceiling. It typically features a sleek, minimalist design, making it suitable for contemporary interiors. Surface lights like the OKIO are often used in areas where recessed lighting isn't possible or desirable. They provide ample illumination without taking up much space, making them ideal for rooms with low ceilings or where a clean, unobtrusive look is preferred.

The body of the light is made from aluminium die-cast, ensuring a strong, lightweight, and durable structure. This material also provides excellent heat dissipation, which helps to extend the life of the LED components.

Okio

Ceiling Surface Light



Features


- Aluminium Die Cast body
- PMMA Len’s for the better beam control
- High-Power LED with Multiple Beam Options
- Non-Corrosive SS Fasteners and Toughened Glass
- IP67 Rating with Pre-Wired Cable Gland.

Applications

- Residential Spaces
- Lobbies & Foyers: Public and Private Buildings
- Retail Sector: Stores and Showrooms
- Corporate: Office Buildings
- Commercial & Business Centers: Multi-purpose Spaces
- Passages & Corridors: Indoor and Outdoor Pathways



NL 4031

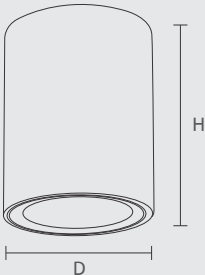

Specification		
Model	NL 4031	NL 4041
Power (W)	6W	8W
Color Temperature (CCT)	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	Lens	Lens
Beam Angle	25°	24°
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	White	White
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 50mm/H : 65mm	D : 60mm/H : 75mm

Outdoor Architectural Lighting



Guide

Ceiling Surface Light

The ceiling-mounted surface light, particularly for entrance, parapet, and facade lighting applications, comes with the following robust features designed to enhance its performance, durability, and visual appeal.

GUIDE

Ceiling Surface Light



NL 4123



NL 4034



NL 4044



NL 4126



NL 4037



NL 4047



NL 4134



NL 4137



NL 4140

The OKIO Ceiling Surface Light is a type of modern lighting fixture designed to be mounted directly onto the ceiling. It typically features a sleek, minimalist design, making it suitable for contemporary interiors. Surface lights like the OKIO are often used in areas where recessed lighting isn't possible or desirable. They provide ample illumination without taking up much space, making them ideal for rooms with low ceilings or where a clean, unobtrusive look is preferred.

The body of the light is made from aluminium die-cast, ensuring a strong, lightweight, and durable structure. This material also provides excellent heat dissipation, which helps to extend the life of the LED components.

Guide

Ceiling Surface Light



Features


- Aluminum Die-Cast Body: Durability and Strength
- Corrosion Resistance
- PC Reflector
- High-Power LED with Narrow, Medium, and Wide Beam Options: Versatility in Lighting
- Energy Efficiency
- Non-Corrosive SS Fasteners and Toughened Glass: Stainless Steel (SS) Fasteners

Applications

- Residential Spaces
- Educational Institutions
- Public and Private Buildings
- Office Buildings
- Multi-purpose Commercial Spaces
- Indoor and Outdoor Pathways



NL 4123



Specification			
Model	NL 4123	NL 4034	NL 4044
Power (W)	8W	8W / 11W	15W / 20W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	25°	60°	55°/ 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60mm/H : 100mm D : 60mm/H : 120mm D : 82mm/H : 160mm		

Outdoor Architectural Lighting



Guide

Ceiling Surface Light

Ceiling-mounted surface lights are designed for entrances, parapets, and facade lighting.

Guide

Ceiling Surface Light



Features

- Aluminum Die-Cast Body: Durability and Strength
- Corrosion Resistance
- PC Reflector
- High-Power LED with Narrow, Medium, and Wide Beam Options: Versatility in Lighting
- Energy Efficiency
- Non-Corrosive SS Fasteners and Toughened Glass: Stainless Steel (SS) Fasteners

Applications

- Residential Spaces
- Educational Institutions
- Public and Private Buildings
- Office Buildings
- Multi-purpose Commercial Spaces
- Indoor and Outdoor Pathways



NL 4047



Specification			
Model	NL 4126	NL 4037	NL 4047
Power (W)	8W	8W / 11W	15W / 20W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Lens	Reflector	Reflector
Beam Angle	25°	60°	55°/ 60°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 60x60mm/ H : 100mm	D : 62x62mm/ H : 140mm	D : 82x82mm/ H : 175mm

Guide

Ceiling Surface Light



Features


- Aluminum Die-Cast Body: Durability and Strength
- Corrosion Resistance
- PC Reflector
- High-Power LED with Narrow, Medium, and Wide Beam Options: Versatility in Lighting
- Energy Efficiency
- Non-Corrosive SS Fasteners and Toughened Glass: Stainless Steel (SS) Fasteners

Applications

- Residential Spaces
- Educational Institutions
- Public and Private Buildings
- Office Buildings
- Multi-purpose Commercial Spaces
- Indoor and Outdoor Pathways



NL 4137



Specification			
Model	NL 4134	NL 4137	NL 4140
Power (W)	18W	24W/32W/36W	32W/36W/45W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	Reflector	Reflector	Reflector
Beam Angle	40°	40°	40°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 100mm/ H : 200mm	D : 140mm/ H : 250mm	D : 160mm/ H : 300mm



Outdoor Architectural Lighting



Gleam Series

In-Ground Lighting

The Gleam Series of in-ground lights is engineered to provide both functional and aesthetic illumination for various outdoor environments. These lights are perfect for illuminating walkways, driveways, gardens, and other outdoor areas, adding safety, security, and beauty to any space.

Gleam Series

In-Ground Lighting

Ideal for lining walkways in gardens, parks, and residential areas, providing safe and attractive illumination for pedestrians. Driveways: Enhances the safety and visibility off driveways, helping to guide vehicles and prevent accidents. Garden Landscaping: Used to highlight specific features in gardens, such as trees, shrubs, or water features, creating a dramatic and inviting ambiance

The Gleam Series of in-ground lights is engineered to provide both functional and aesthetic illumination for various outdoor environments. These lights are perfect for illuminating walkways, driveways, gardens, and other outdoor areas, adding safety, security, and beauty to any space.

GLEAM SERIES



NL 4505



NL 4509



NL 4510



NL 4511

Gleam Series

In-Ground Lighting



Features

- Walkways and Pathways
- Driveways
- Garden Landscaping
- Outdoor Patios and Decks
- Commercial and Public Spaces


Applications

- Walkways and Pathways
- Driveways
- Garden Landscaping
- Outdoor Patios and Decks
- Commercial and Public Spaces



NL 4505


NL 4509



Accessories



Outer Housing



Specification		
Model	NL 4505	NL 4509
Power (W)	5W	10W
Color Temperature (CCT)	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	25°	25°
Housing	SS Top Ring & Aluminum	Die Cast Body
Finish	SS	SS
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 55mm/H : 86mm/ HJ : 110mm	D : 85mm/H : 90mm/ HJ : 115mm

Gleam Series

In-Ground Lighting




Features

- Walkways and Pathways
- Driveways
- Garden Landscaping
- Outdoor Patios and Decks
- Commercial and Public Spaces

Applications


- Walkways and Pathways
- Driveways
- Garden Landscaping
- Outdoor Patios and Decks
- Commercial and Public Spaces

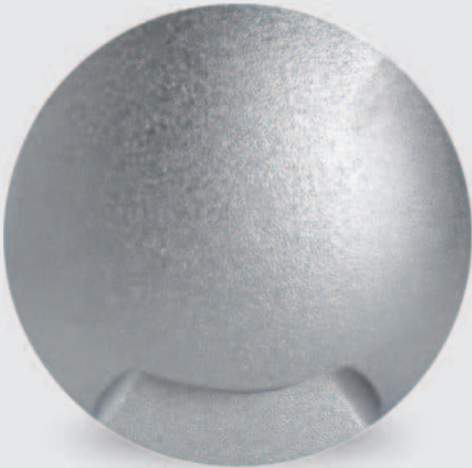

NL 4510




NL 4511



Accessories




Outer Housing



Specification		
Model	NL 4510	NL 4511
Power (W)	5W	8W
Color Temperature (CCT)	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	1 Way	2 Way
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	SS	SS
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 75mm / H: 86mm / HJ : 100mm	D : 75mm / H : 86mm / HJ : 100mm



Outdoor Architectural Lighting

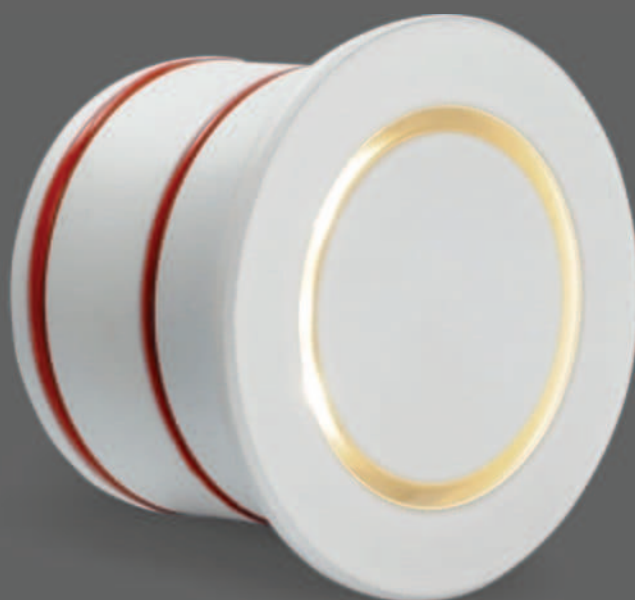

Lucia

Floor Washer / Flood Light

The Lucia Series outdoor LED floor washer and flood light is designed for a wide range of exterior applications, offering robust construction and high performance in various outdoor environments. These lights are ideal for creating safe, well-lit pathways and landscapes, enhancing the aesthetics and functionality of outdoor spaces.

Lucia

Floor Washer / Flood/ Foot Light

LUCIA



Lucia - Outdoor LED Floor Washer suitable for exterior landscape, pathway, corridor, external building periphery, ramp, and parking lot area. Aluminium die-cast housing with high resistance against corrosion pre-treated with POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather .

LORENZA WALL SURFACE



WALL RECESSED



The Lorenza outdoor LED floor washer and foot light is designed to provide robust and efficient lighting for various exterior applications. Its durable construction and high-performance features make it suitable for a range of outdoor settings.

Lucia

Floor Washer / Flood Light



Features

- Aluminum Die-Cast Body: Durability
- High-Power LED for Better Output Luminous: Enhanced Brightness
- Energy Efficiency.
- Non-Corrosive Stainless Steel Fasteners and Toughened Glass: Stainless Steel Fasteners.
- Pre-Wired Cable Gland Compliance to IP67 Rating: Weatherproof Design.
- Mounting Jacket/Sleeve Included: Installation Flexibility

Applications

- Pathway and Corridor Lighting: Safety and Visibility
- External Building Periphery: Security Lighting
- Ramps and Parking Lot Areas: Functional Illumination.




NL 4501



NL 4501 A




NL 4502



Accessories



Outer Housing



Specification			
Model	NL 4501	NL 4501 A	NL 4502
Power (W)	3W	3W	6W
Color Temperature (CCT)	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	High power LED	High power LED	High power LED
Beam Angle	Diffused	Diffused	Diffused
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	White	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 50mm/H : 70mm/ HJ :95mm	D : 50mm/H : 70mm/ HJ :95mm	D : 65mm/H : 70mm/ HJ :95mm

Lucia

Floor Washer / Flood Light



Features

- Aluminum Die-Cast Body: Durability
- High-Power LED for Better Output Luminous: Enhanced Brightness
- Energy Efficiency.
- Non-Corrosive Stainless Steel Fasteners and Toughened Glass: Stainless Steel Fasteners.
- Pre-Wired Cable Gland Compliance to IP67 Rating: Weatherproof Design.
- Mounting Jacket/Sleeve Included: Installation Flexibility

Applications

- Pathway and Corridor Lighting: Safety and Visibility
- External Building Periphery: Security Lighting
- Ramps and Parking Lot Areas: Functional Illumination.



NL 4501B




NL 4501C



NL 4501D




NL 4029



Specification				
Model	NL 4501 B	NL 4501 C	NL 4501 D	NL 4029
Power (W)	3W	3W	3W	3W
Color Temperature (CCT)	3000K	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	High power LED	High power LED	High power LED	High power LED
Beam Angle	Forward Throw	Diffused	Diffused	Asymmetric
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 50mm H : 70mm HJ :95mm	D : 50mm H : 70mm HJ :95mm	D : 50mm H : 70mm HJ :95mm	D : 65mm H : 65mm HJ :90mm



Outdoor Architectural Lighting

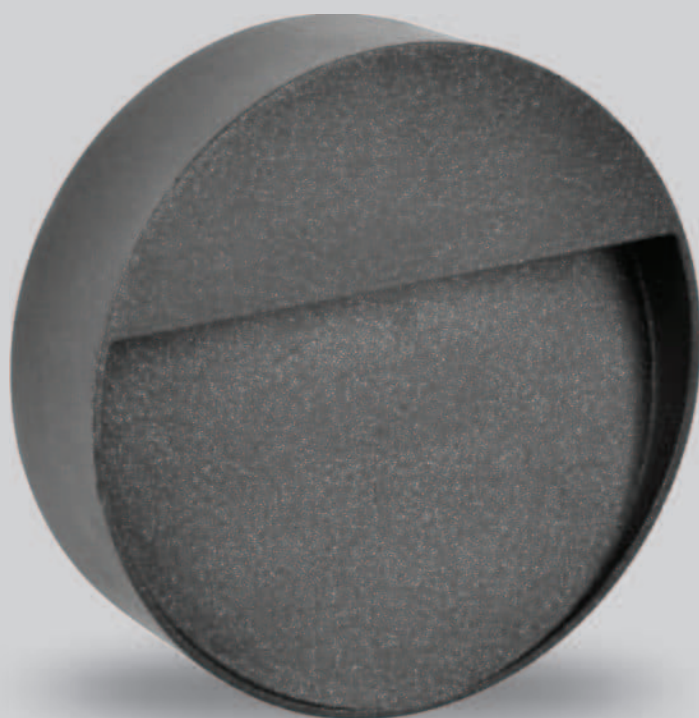

Lorenza

Floor Washer / Foot Light

The Lorenzo outdoor LED floor washer and foot light is designed to provide robust and efficient lighting for various exterior applications. Its durable construction & high-performance features make it suitable for a range of outdoor settings.

Lorenza


Floor Washer / Ffoot Light Surface Mounted

Features

- Aluminium die cast body
- Corrosion Resistance
- Polymerization Pre-Treatment: Enhanced Protection
- Weatherproof Design
- Hi-power LED used for better output luminous.
- Energy Efficiency
- Pathways and Corridors
- Applications: Exterior Landscape

Applications


- Exterior Landscape: Garden and Yard Lighting
- Pathways and Corridors: Walkway Lighting
- Ramps and Parking Lots: Safety Lighting

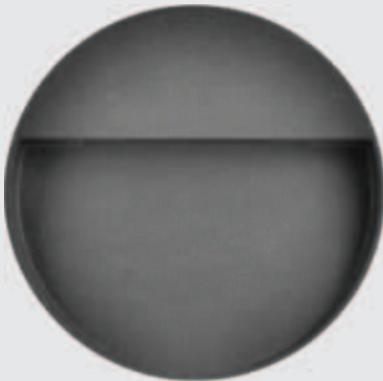

NL 4203





NL 4204

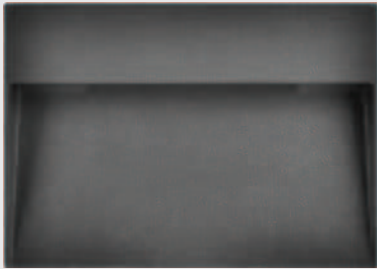

NL 4205



NL 4206



Specification				
Model	NL 4203	NL 4204	NL 4205	NL 4206
Power (W)	8W	8W	8W	8W
Color Temperature (CCT)	3000K	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED	LED
Beam Angle	Asymmetrical	Asymmetrical	Asymmetrical	Asymmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 100mm H : 32mm	D : 100x100mm H : 32mm	D : 105x75mm H : 32mm	D : 75x105mm H : 32mm

Lorenza

Floor Washer / Floot Light Recessed Mounted

Features


- Aluminium die cast body
- Corrosion Resistance
- Polymerization Pre-Treatment: Enhanced Protection
- Weatherproof Design
- Hi-power LED used for better output luminous.
- Energy Efficiency
- Pathways and Corridors
- Applications: Exterior Landscape

Applications

- Exterior Landscape: Garden and Yard Lighting
- Pathways and Corridors: Walkway Lighting
- Ramps and Parking Lots: Safety Lighting



NL 4208

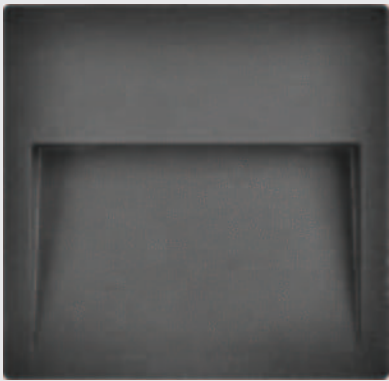



NL 4209



NL 4210



NL 4211

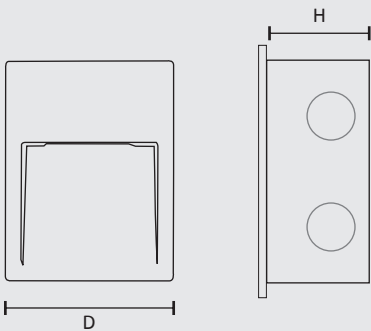

Specification				
Model	NL 4208	NL 4209	NL 4210	NL 4211
Power (W)	8W	8W	8W	8W
Color Temperature (CCT)	3000K	3000K	3000K	3000K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED	LED
Beam Angle	Asymmetrical	Asymmetrical	Asymmetrical	Asymmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 115mm H : 50mm	D : 115x115mm H : 50mm	D : 120x90mm H : 50mm	D : 90x120mm H : 50mm



Outdoor Architectural Lighting

Nuvo-NL 100

Bollard Light

The Nuvo bollard LED garden and pathway luminaires are designed to provide effective, glare-free illumination for various outdoor spaces. With a robust construction and specialized features, these luminaires enhance safety and aesthetics in gardens, pathways, and public area lighting.




Nuvo-NL 100

Bollard Light

Aluminium Housing: High Corrosion Resistance: The bollard is constructed from high-quality aluminium, which provides excellent resistance to corrosion. This makes it suitable for use in diverse environmental conditions, ensuring longevity and durability.

Nuvo bollards ensure a comfortable lighting experience. This feature helps in reducing visual discomfort and creating a pleasant environment. **Effective Ground Lighting:** The luminaries are engineered to evenly distribute light across the ground surface, enhancing visibility and safety without causing harsh glare.

The Nuvo bollard LED luminaries offer a blend of durability, aesthetics, and functionality, making them an excellent choice for enhancing lighting in various outdoor settings.

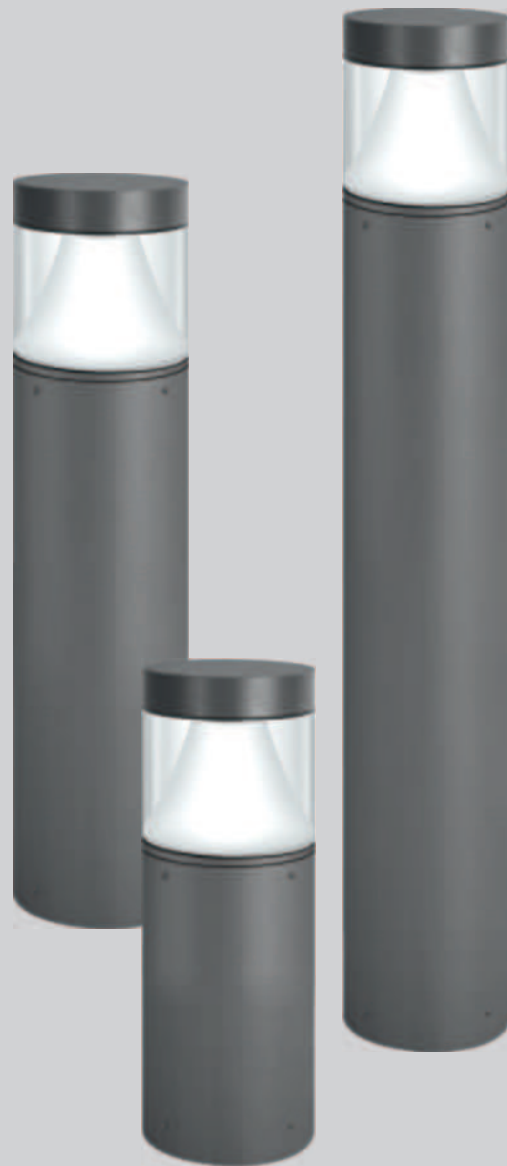

Nuvo-NL 100

Bollard Lights






Features

- Stone Wash Surface Treatment & Enhanced Durability
- Glare-Free Illumination Comfortable Lighting
- Versatile Applications Entrances

Applications

- Entrances
- Footpaths
- Compound Periphery
- Garden and Landscape

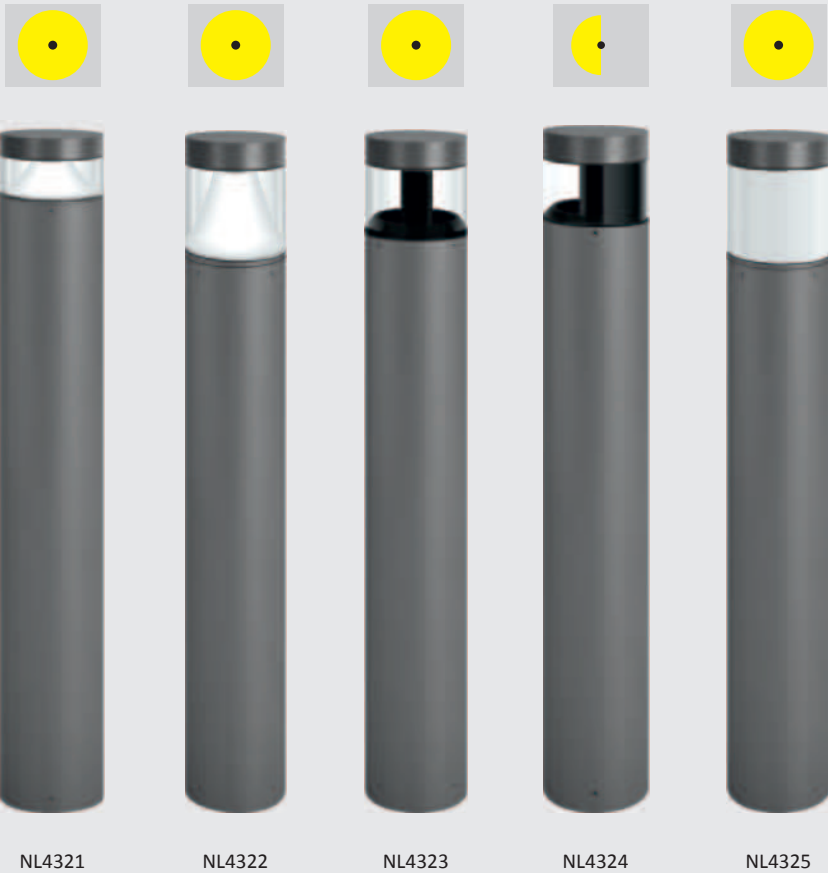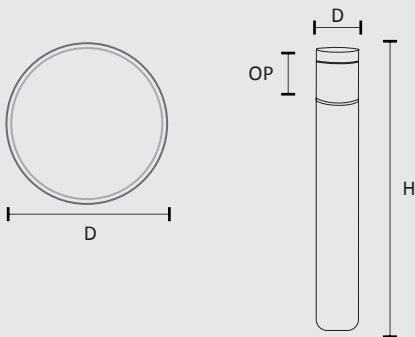

Specification					
Model	NL 4321	NL 4322	NL 4323	NL 4324	NL 4325
Power (W)	10W/12W	10W/12W	10W/12W	10W/12W	10W/12W
Color Temperature (CCT)	3K/4K/TW	3K/4K/TW	3K/4K/TW	3K/4K/TW	3K/4K/TW
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED	LED	LED
Beam Angle	360°	360°	360°	180°	360°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 100mm H : 300/700/875mm OP: 35mm	D : 100mm H : 365/765/940mm OP: 100mm	D : 100mm H : 330/730/905mm OP: 65mm	D : 100mm H : 330/730/905mm OP: 65mm	D : 100mm H : 365/765/940mm OP: 100mm

Nuvo-NL 140




Bollard Lights

Features

- Stone Wash Surface Treatment & Enhanced Durability
- Glare-Free Illumination Comfortable Lighting
- Versatile Applications Entrances

Applications

- Entrances
- Footpaths
- Compound Periphery
- Garden and Landscape

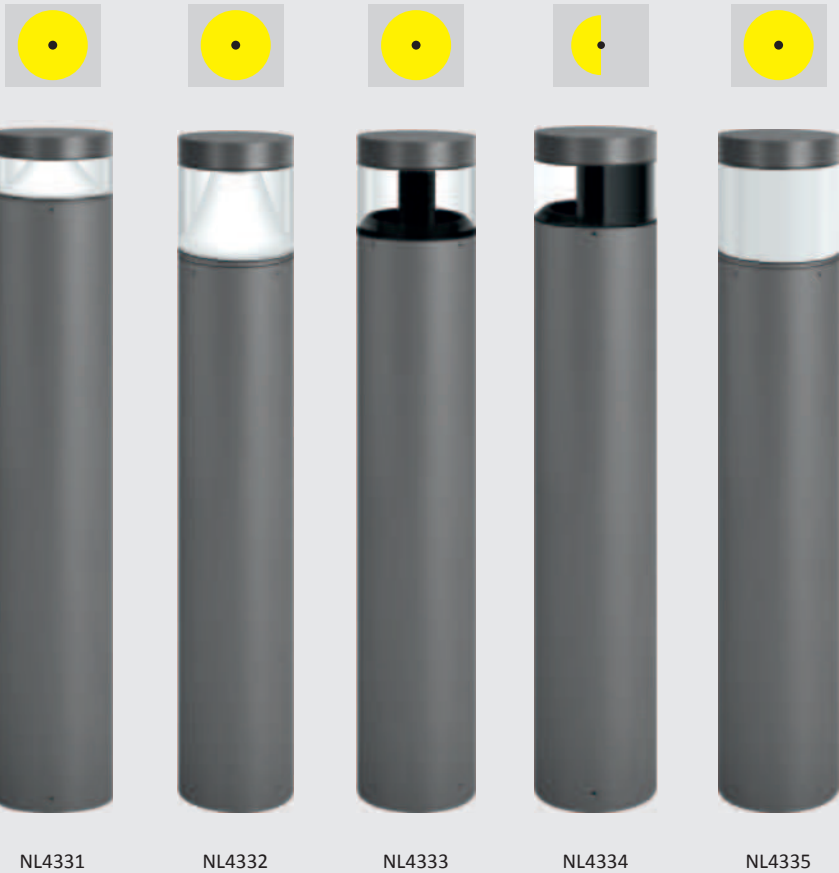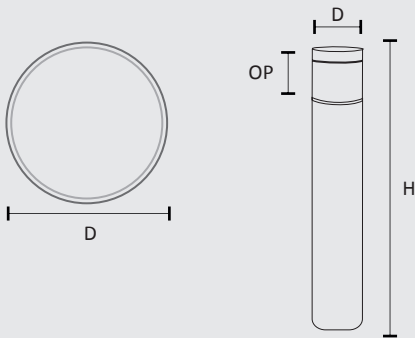

Specification					
Model	NL 4331	NL 4332	NL 4333	NL 4334	NL 4335
Power (W)	15W/20W	15W/20W	15W/20W	15W/20W	15W/20W
Color Temperature (CCT)	3K/4K/TW	3K/4K/TW	3K/4K/TW	3K/4K/TW	3K/4K/TW
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED	LED	LED
Beam Angle	360°	360°	360°	180°	360°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 140mm H : 300/700/900mm OP: 48mm	D : 140mm H : 350/750/950mm OP: 98mm	D : 140mm H : 315/715/915mm OP: 62mm	D : 140mm H : 315/715/915mm OP: 62mm	D : 140mm H : 350/750/950mm OP: 98mm

Nuvo-NL 165




Bollard Lights

Features

- Stone Wash Surface Treatment & Enhanced Durability
- Glare-Free Illumination Comfortable Lighting
- Versatile Applications Entrances

Applications

- Entrances
- Footpaths
- Compound Periphery
- Garden and Landscape

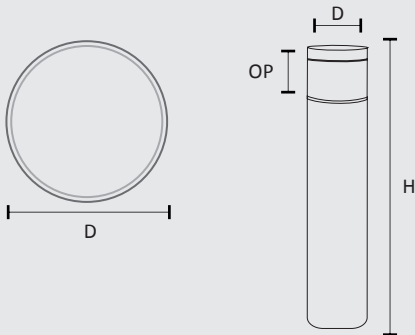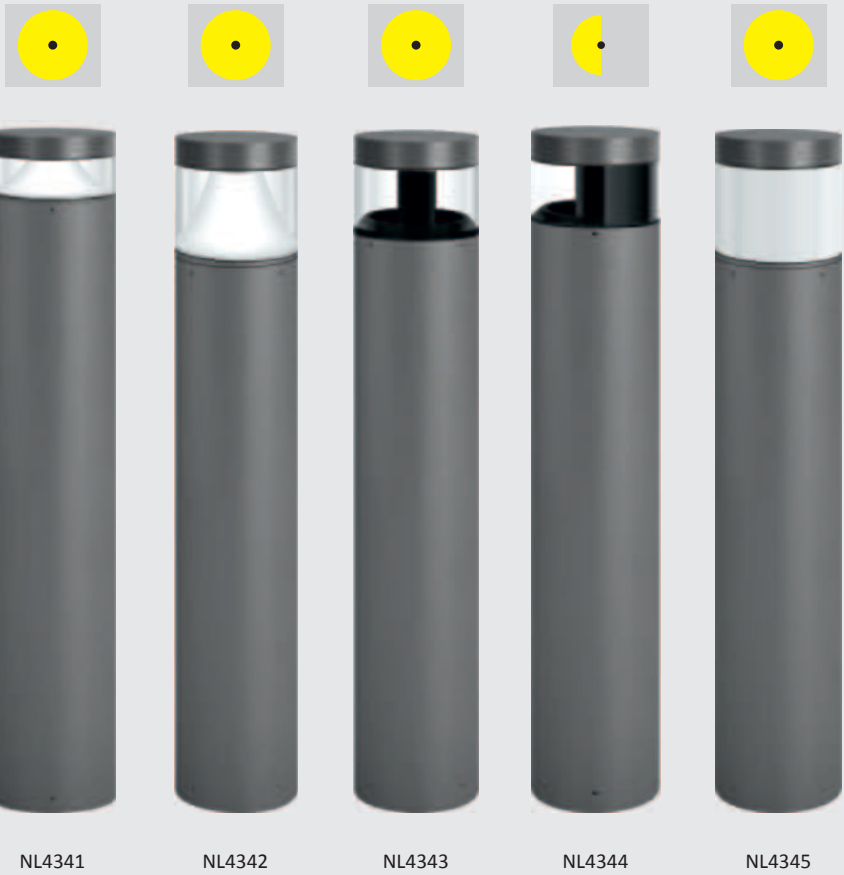

Specification					
Model	NL 4341	NL 4342	NL 4343	NL 4344	NL 4345
Power (W)	20W/24W	20W/24W	20W/24W	20W/24W	20W/24W
Color Temperature (CCT)	3K/4K/TW	3K/4K/TW	3K/4K/TW	3K/4K/TW	3K/4K/TW
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED	LED	LED
Beam Angle	360°	360°	360°	180°	360°
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 165mm H : 310/710/910mm OP: 60mm	D : 165mm H : 370/770/970mm OP: 120mm	D : 165mm H : 370/770/970mm OP: 120mm	D : 165mm H : 370/770/970mm OP: 120mm	D : 165mm H : 350/750/950mm OP: 100mm

Nuvo-NL 165



Bollard Lights

Features

- Stone Wash Surface Treatment & Enhanced Durability
- Glare-Free Illumination Comfortable Lighting
- Versatile Applications Entrances



Applications

- Entrances
- Footpaths
- Compound Periphery
- Garden and Landscape

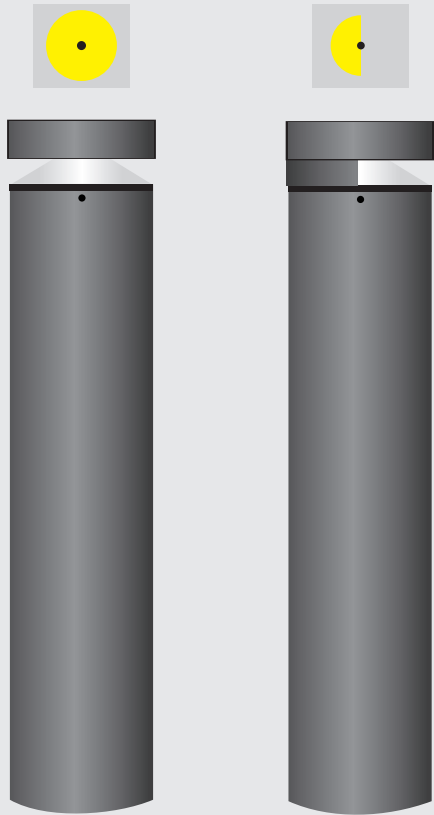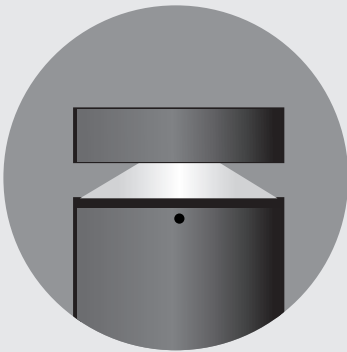

NL 4346


NL 4347

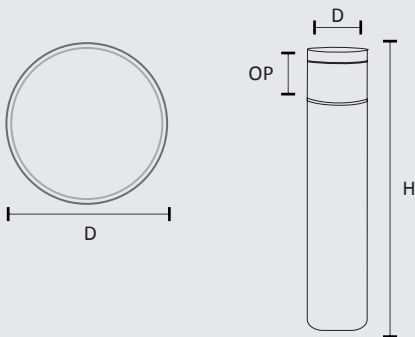

Specification		
Model	NL 4346	NL 4347
Power (W)	25W	25W
Color Temperature (CCT)	3K/4K/TW	3K/4K/TW
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	360°	180°
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 165mm H : 375mm/775mm/975mm OP: 75mm	D : 165mm H : 375mm/775mm/975mm OP: 75mm



Outdoor Architectural Lighting

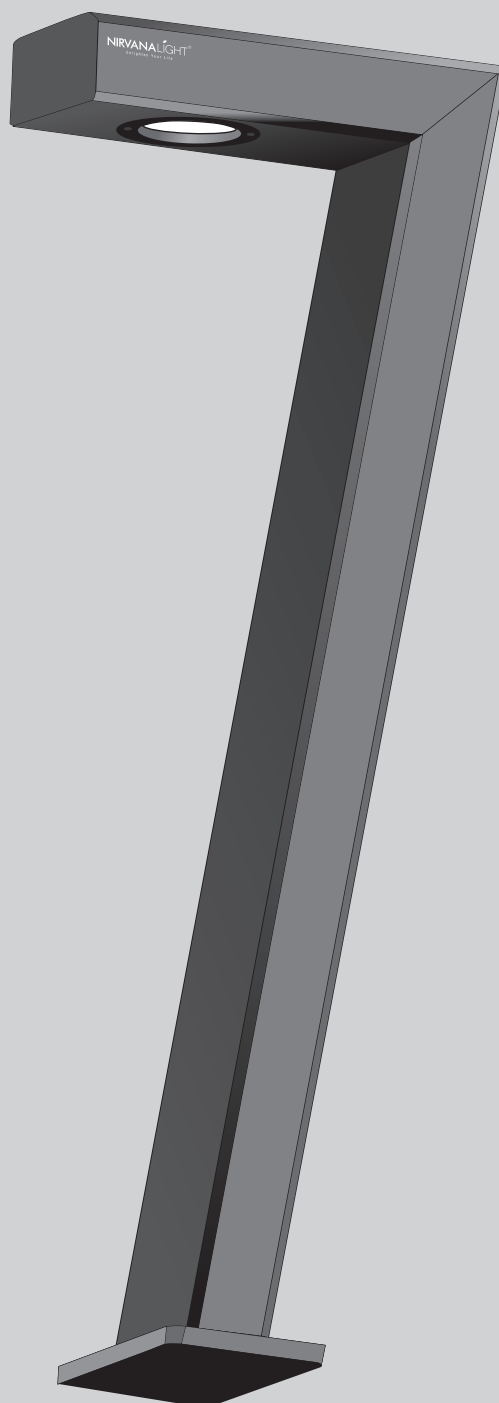

Trend

Bollard Light

The Trend bollard LED luminaires are designed to offer effective, glare-free illumination for a variety of outdoor environments. With robust construction and specialized features, these luminaires enhance both functionality and aesthetics in garden, pathway, and public area lighting.


Trend

Bollard Light

Trend - LED garden and pathway luminaries, Aluminium housing with high corrosion resistance. Stone wash surface treatment prior to painting process. Glare free illumination of ground surface and are perfect for illuminating entrances, footpaths, public area, compound periphery as well as garden and landscape architecture.

High Corrosion Resistance
Constructed from durable aluminium, the bollard luminaries are engineered to resist corrosion, ensuring long-term performance even in challenging weather conditions.

The aluminium material provides a combination of strength and lightweight properties, making it suitable for outdoor use.

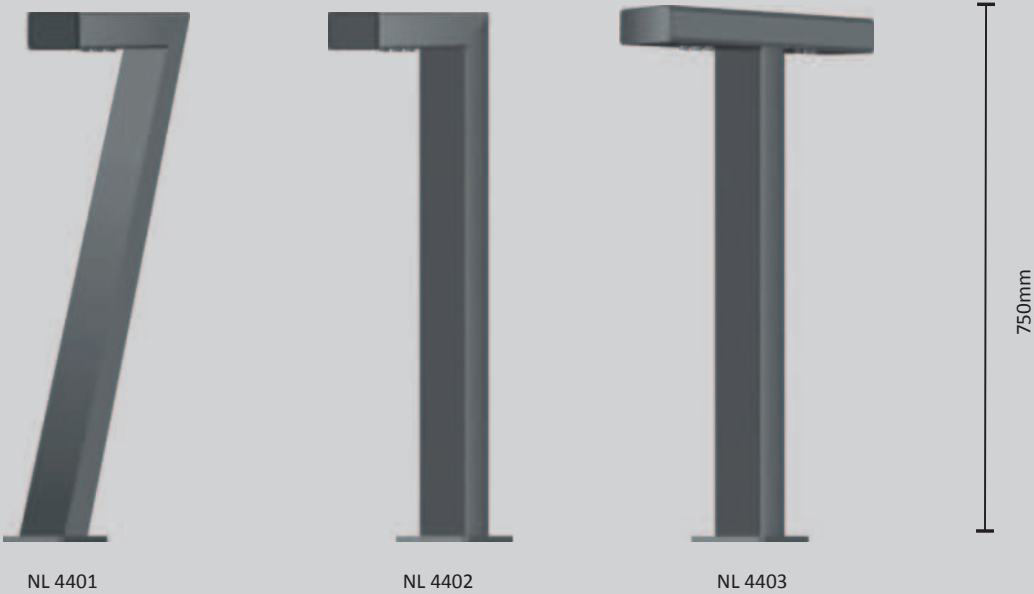

Trend




Bollard Lights

Features

- Aluminium Housing
- Lightweight and Durable
- Stone Wash Surface Treatment
- Aesthetic Finish

Applications

- Driveways - Function
- Pathways - Function
- Flowerbeds - Function
- Entrances - Function
- Squares & Gardens -Function

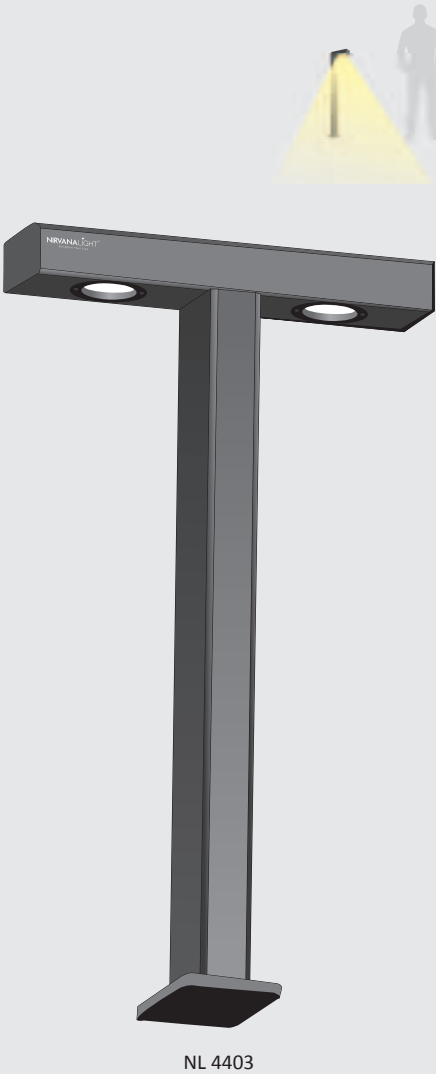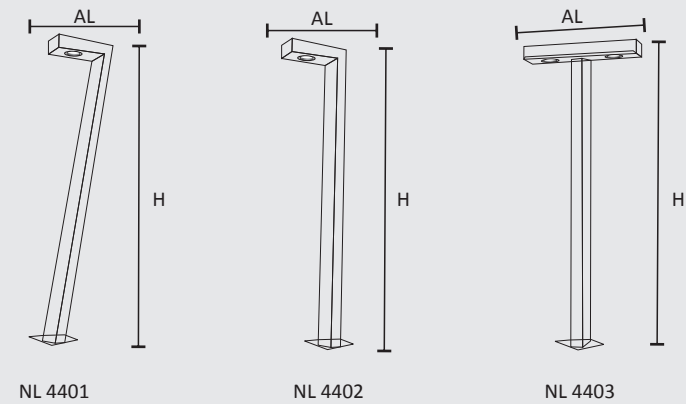


Specification			
Model	NL 4401	NL 4402	NL 4403
Power (W)	10W/15W	10W/15W	2x10W/15W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED
Beam Angle	Asymmetrical	Asymmetrical	Asymmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	AL : 225mm H : 750mm	AL : 225mm H : 750mm	AL : 400mm H : 750mm

Outdoor Architectural Lighting

Slim Trend

Bollard Light

The Trend bollard LED luminaires are designed to offer effective, glare-free illumination for a variety of outdoor environments. With robust construction and specialized features, these luminaires enhance both functionality and aesthetics in garden, pathway, and public area lighting.

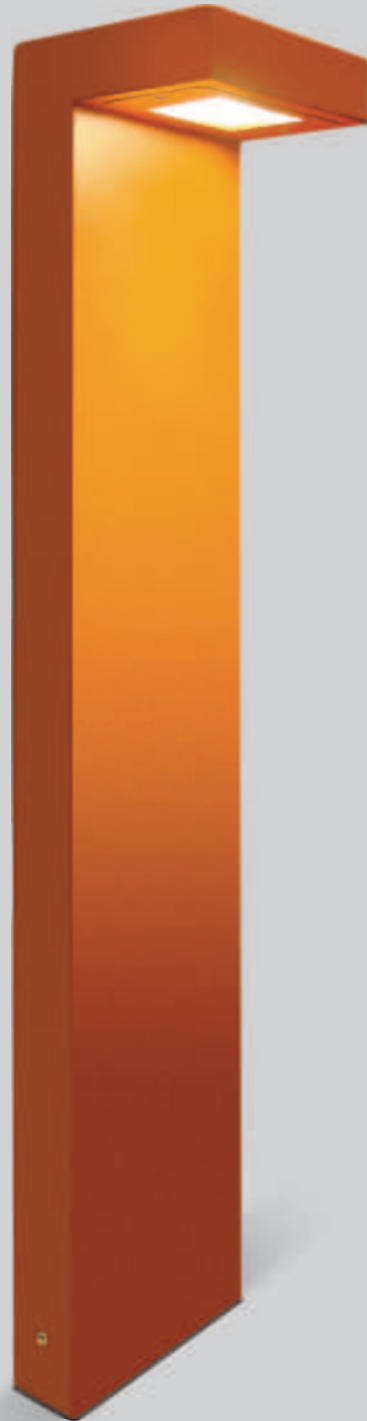


Slim Trend

Bollard Light


Trend - LED garden and pathway luminaries, Aluminium housing with high corrosion resistance. Stone wash surface treatment prior to painting process. Glare free illumination of ground surface and are perfect for illuminating entrances, footpaths, public area, compound periphery as well as garden and landscape architecture.

High Corrosion Resistance
Constructed from durable aluminium, the bollard luminaries are engineered to resist corrosion, ensuring long-term performance even in challenging weather conditions.

The aluminium material provides a combination of strength and lightweight properties, making it suitable for outdoor use.



NL 4355

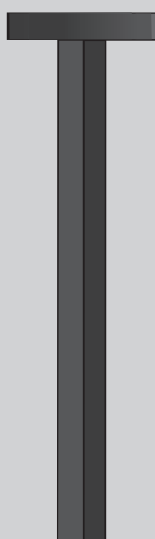


NL 4356



NL 4357

750mm

Arial View NL 4357

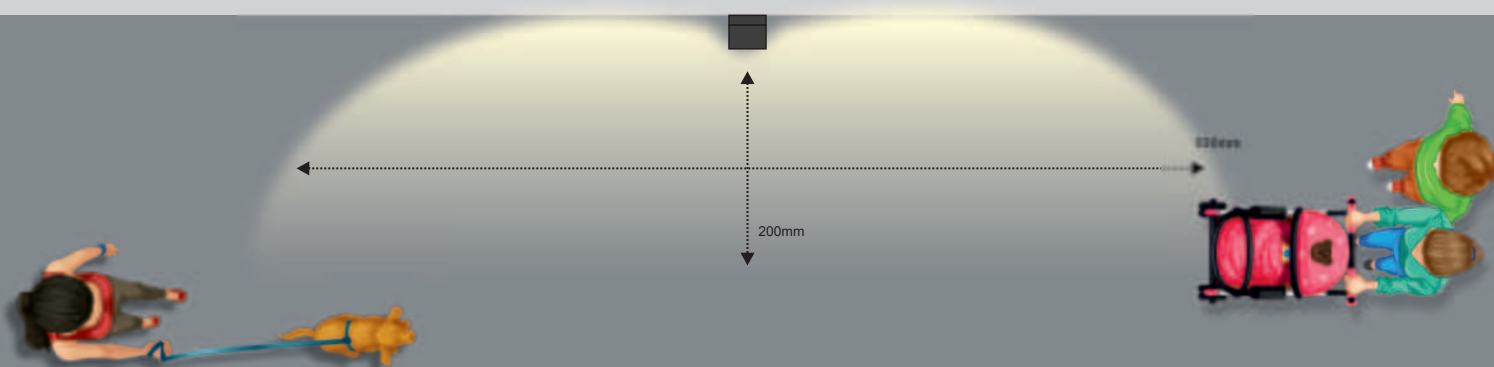

Slim Trend

Bollard Lights



Features


- Aluminium Housing
- Lightweight and Durable
- Stone Wash Surface Treatment
- Aesthetic Finish

Applications

- Driveways - Function
- Pathways - Function
- Flowerbeds - Function
- Entrances - Function
- Squares & Gardens -Function




NL 4355




NL 4356



NL 4357

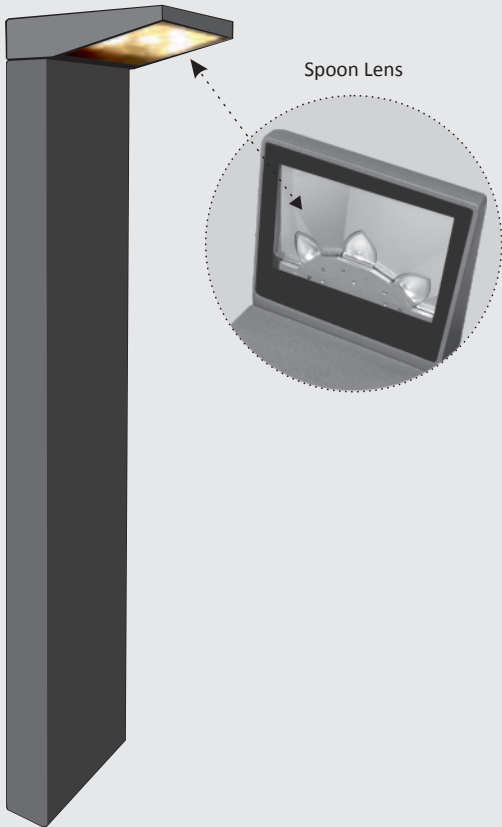

NL 4357




Specification			
Model	NL 4355	NL 4356	NL 4357
Power (W)	10W/15W	2x10W/15W	10W/15W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED
Beam Angle	Asymmetrical	Asymmetrical	Asymmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	AL : 115mm H : 750mm	AL : 190mm H : 750mm	AL : 140mm H : 750mm

Outdoor Architectural Lighting

Adjustable

Bollard Light

The "Adjustable" bollard from Nirvana Lighting is a versatile lighting solution designed for various outdoor settings. Here's an overview of its features & applications.

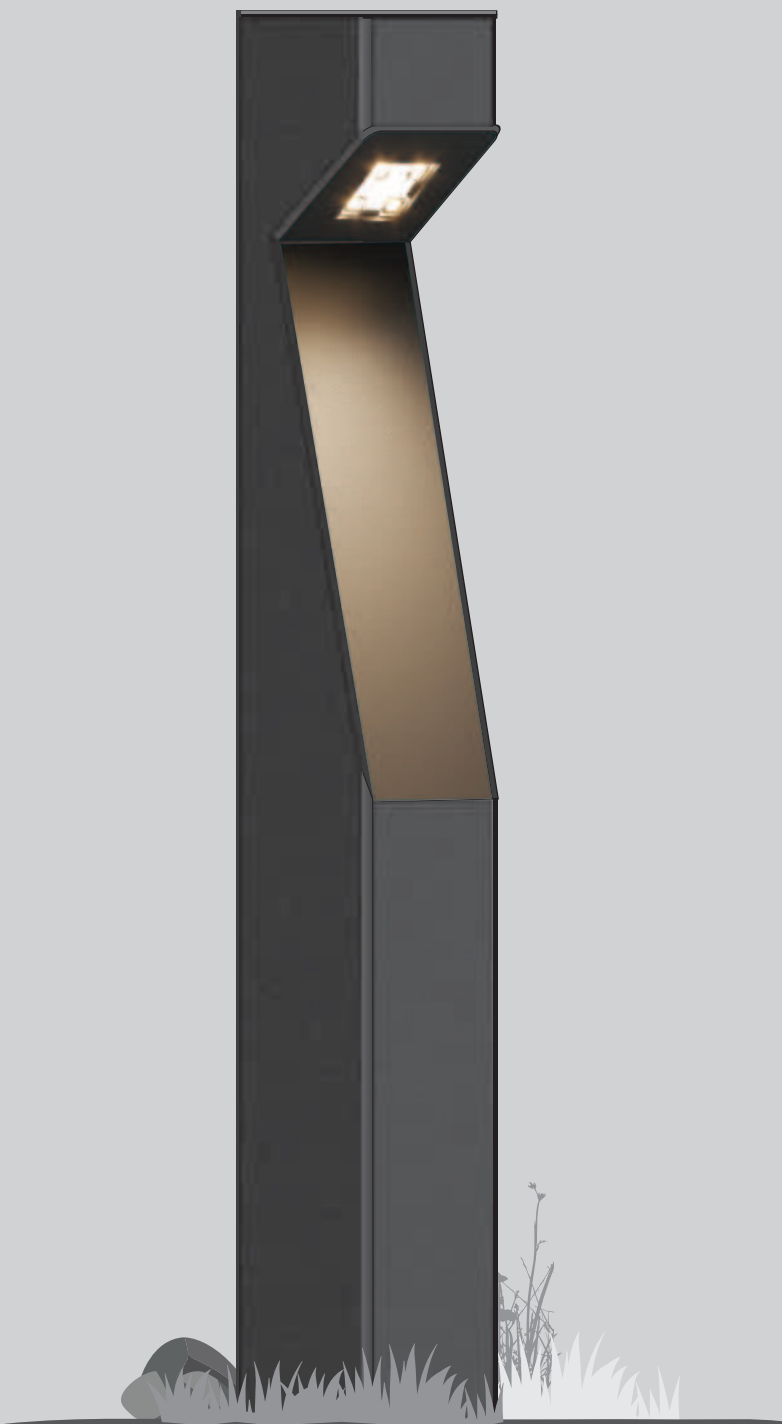

Adjustable

Bollard Light

Adjustable Bollards LED garden and pathway luminaires, Aluminium housing with high corrosion resistance. Stone wash surface treatment prior to painting process. Glare free illumination of ground surface and are perfect for illuminating entrances, footpaths, public area, compound periphery as well as garden & landscape architecture.

Allows for customizable light direction, enhancing flexibility in illumination. Energy-efficient & long-lasting, providing effective lighting while conserving energy.

Durable with high corrosion resistance, ensuring longevity even in harsh outdoor environments.



NL 4405



NL 4406



NL 4407



NL 4408

Adjustable LED



10°

20°

30°



Adjustable Bollard Lights

Features

- Adjustable Design
- LED Technology
- Aluminum Housing
- Stone Wash Surface Treatment
- Glare-Free Illumination

Applications


- Entrances
- Footpaths
- Public Areas
- Compound Periphery
- Garden and Landscape Architecture




NL 4408



NL 4405

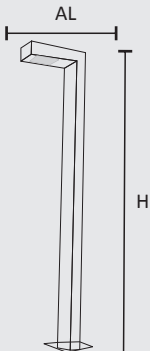

NL 4406

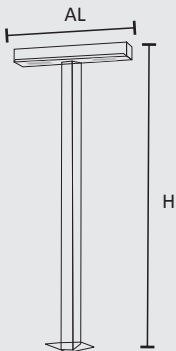

NL 4407



NL 4408



Specification				
Model	NL 4405	NL 4406	NL 4407	NL 4408
Power (W)	10W/15W	10W/15W	2x10W/15W	10W/15W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED	LED
Beam Angle	Type II	Type II	Type II	Type II
Housing	GI	GI	GI	GI
Finish	Dark Grey	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	Ip65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	AL : 225mm/ H : 750mm	AL : 225mm/ H : 750mm	AL : 400mm/ H : 750mm	D : 100x100mm/ H : 750mm

Adjustable Led
10°, 20°, 30°

4mtrs

2mtrs

Adjustable Led
10°, 20°, 30°

6mtrs

3mtrs

Adjustable Led
10°, 20°, 30°

8mtrs

4mtrs

Longitudinal Asymmetric Optic (AL)



Adjustable Led
10°,20°,30°



2mtr 2mtr

Adjustable Led
10° 20° 30°



2mtr 2mtr

Adjustable Led
10°,20°,30°




Outdoor Architectural Lighting


Single/Dual Bollard Light

It sounds like you're describing a specific type of outdoor lighting product designed for garden and pathway illumination. These luminaires are characterized by Single/Dual-LED Configurations: Providing flexible lighting options depending on the desired brightness or design.

The NUVO Bollard LED garden & pathway luminaires are designed to provide effective, glare-free illumination for various outdoor spaces. With a robust construction & specialized features, these luminaires enhance safety & aesthetics in garden, pathway, & public area lighting.

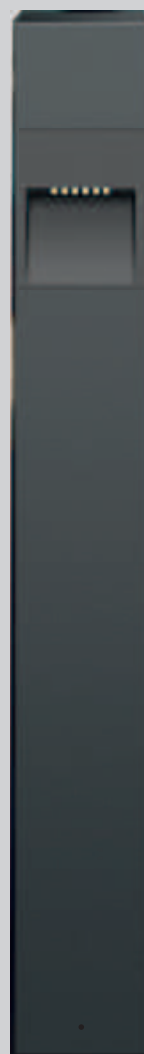

NL 4409

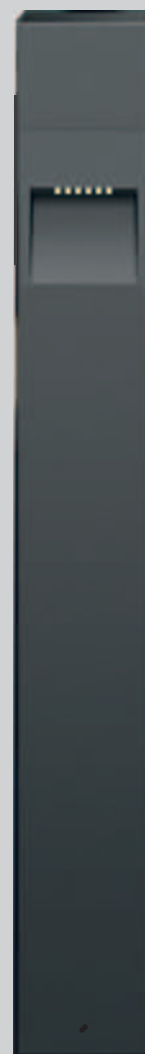

NL 4410

NL 4409
One way

NL 4410
Two way



Single/Dual Bollard Lights

Features

- Aluminum Extruded Die Cast Body
- Hi-Power SMD LED
- Non-Corrosive Stainless Steel (SS) Fasteners
- Pre-Wired with Cable Gland
- Silicon Gasket

Applications

- Driveways
- Pathways
- Flowerbeds
- Entrances
- Squares & Gardens



NL 4409

NL 4410



Specification		
Model	NL 4409	NL 4410
Power (W)	12W/15W	2x12W/15W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 100V-240V	AC 100V-240V
Optics	LED	LED
Beam Angle	Asymmetrical	Asymmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	40,000 Hrs	40,000 Hrs
Size	D : 100x100mm/ H : 750mm	D : 100x100mm/ H : 750mm



Outdoor Architectural Lighting

Nuvo Bollard

Motion Sensor Series

Introducing Nirvana Light's Motion Sensor Bollard System.

Designed to enhance safety and security in residential, commercial, and public settings, our motion sensor bollards provide a seamless blend of functionality and style. With cutting-edge technology, these smart lights automatically activate when motion is detected, ensuring well-lit pathways while conserving energy when not in use.



Nuvo Bollard

Motion Sensor Series

The intelligent Motion sensor system can be integrated with Nirvana light other range of bollards.


NUVO - BOLLARD NL 100/140/165



TREND/ADJUSTABLE - BOLLARD



SINGLE/DUAL BOLLARD

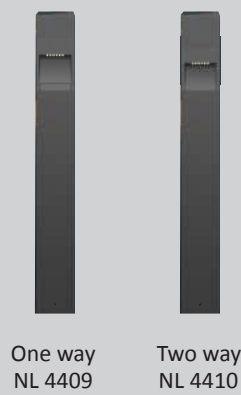



Outdoor Architectural Lighting

Architectural garden Lights

Introducing delicate Garden Led Lights, represents a perfect blend of aesthetic appeal and advanced technology. Designed specifically for enhancing outdoor spaces, these lights not only illuminate gardens but also contribute to their beauty during nighttime, creating enchanting atmospheres for events, gatherings, or serene evenings.

- Elegant Design
- Durable Construction
- Easy Installation




Architectural

Garden Lights



Earth Spike Mounted

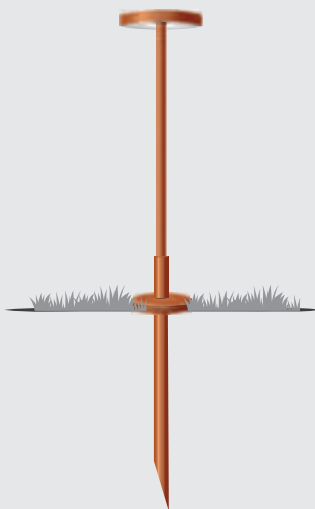


External Accessories



IP67 Cable Connector



Earth Spike Mounted

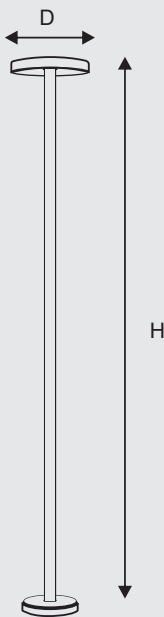


Specification			
Model	NL 4721-450	NL 4721-600	NL 4721-800
Power (W)	5W	5W	5W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	24V DC	24V DC	24V DC
Optics	SMD LED	SMD LED	SMD LED
Beam Angle	-	-	-
Housing	Aluminium Die Cast		
Finish	Rustic Brown/White/Dark Grey		
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 100x15mm H : 450mm	D : 100x15mm H : 600mm	D : 100x15mm H : 800mm

Architectural

Garden Lights



Earth Spike Mounted

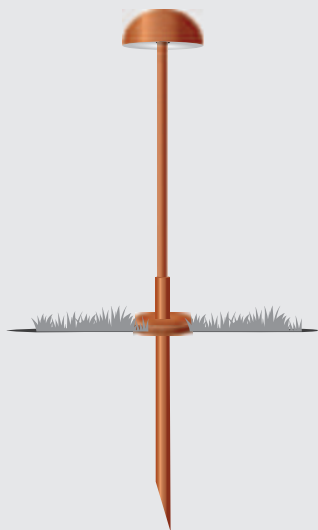

External Accessories



IP67 Cable Connector



Earth Spike Mounted



Specification


Model	NL-4722-450	NL-4722-600	NL-4722-800
Power (W)	5W	5W	5W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	24V DC	24V DC	24V DC
Optics	SMD LED	SMD LED	SMD LED
Beam Angle	-	-	-
Housing	Aluminium Die Cast		
Finish	Rustic Brown/White/Dark Grey		
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 90x40mm H : 450mm	D : 90x40mm H : 600mm	D : 90x40mm H : 800mm

Architectural

Garden Lights



Earth Spike Mounted

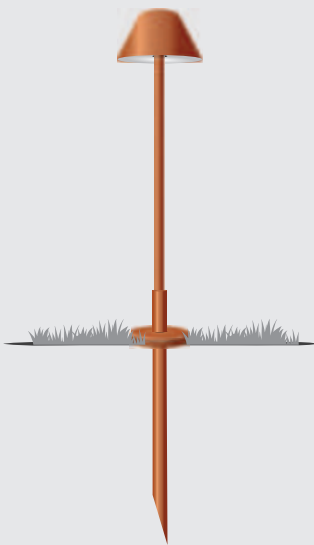


External Accessories



IP67 Cable Connector



Earth Spike Mounted

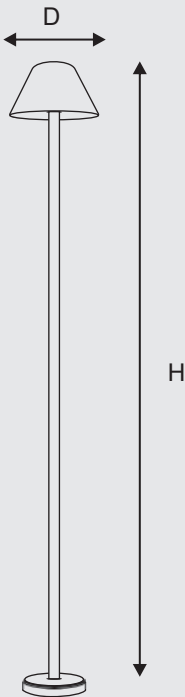


Specification


Model	NL 4723-450	NL 4723-600	NL 4723-800
Power (W)	5W	5W	5W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	24V DC	24V DC	24V DC
Optics	SMD LED	SMD LED	SMD LED
Beam Angle	-	-	-
Housing	Aluminium Die Cast		
Finish	Rustic Brown/White/Dark Grey		
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 90x50mm H : 450mm	D : 90x50mm H : 600mm	D : 90x50mm H : 800mm

Architectural

Garden Lights

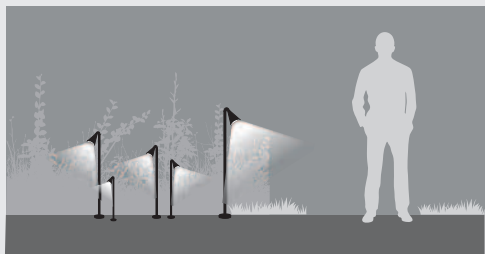

Earth Spike Mounted

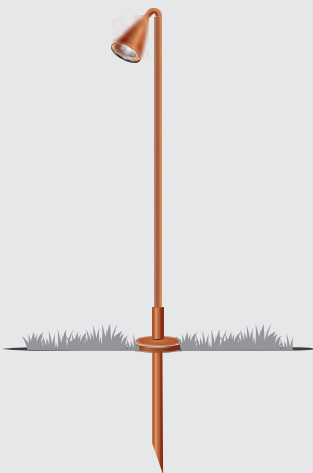



External Accessories



IP67 Cable Connector



Earth Spike Mounted

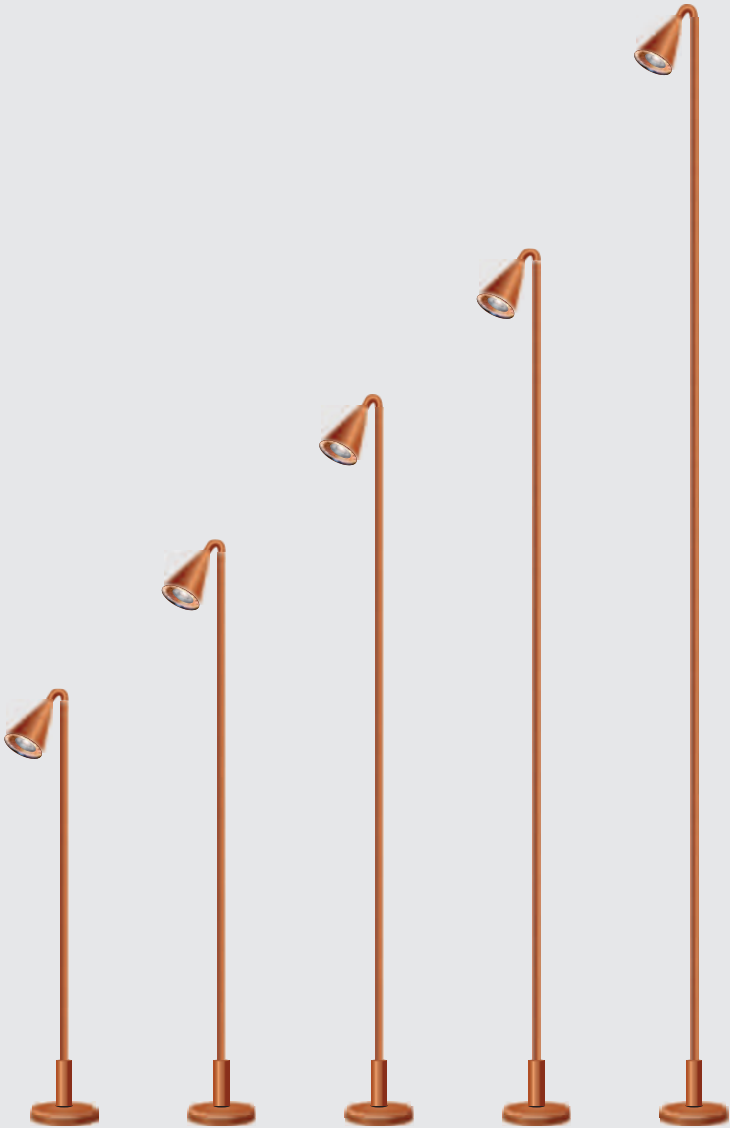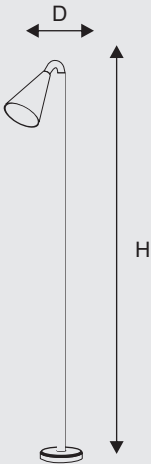


Specification					
Model	NL 4724-450	NL 4724-600	NL 4724-750	NL 4724-900	NL 4724-1150
Power (W)	2W	2W	2W	2W	2W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	24V DC	24V DC	24V DC	24V DC	24V DC
Optics	SMD LED	SMD LED	SMD LED	SMD LED	SMD LED
Beam Angle	-	-	-	-	-
Housing	Aluminium Die Cast				
Finish	Rustic Brown/White/Dark Grey				
Color Rendering Index (CRI)	>80	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 45x65mm H : 450mm	D : 45x65mm H : 600mm	D : 45x65mm H : 750mm	D : 45x65mm H : 900mm	D : 45x65mm H : 1150mm

Architectural

Garden Lights



Earth Spike Mounted

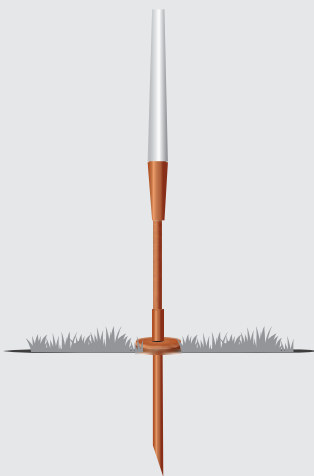



External Accessories



IP67 Cable Connector



Earth Spike Mounted

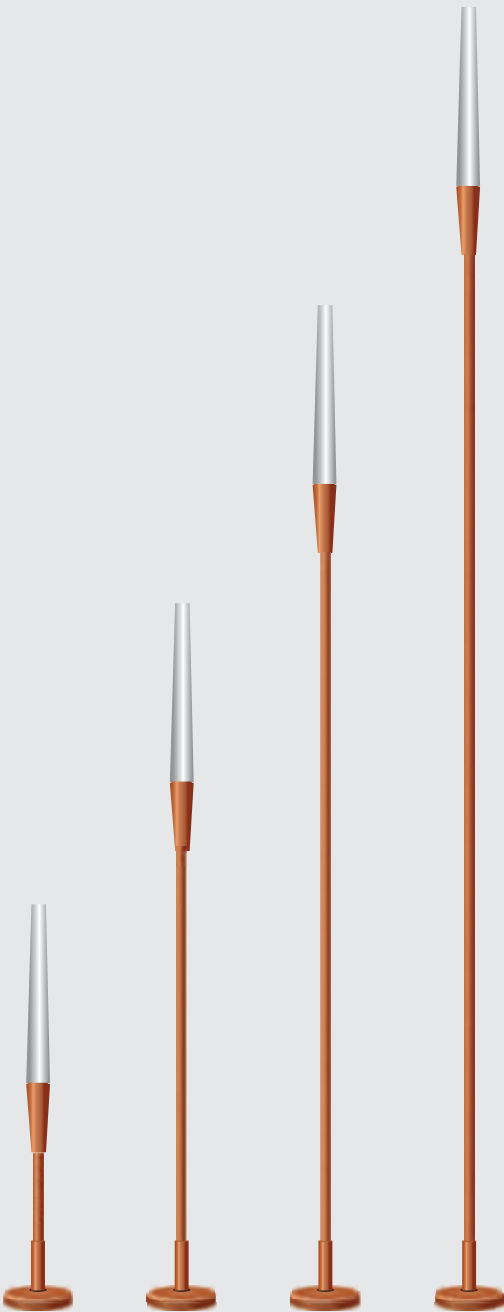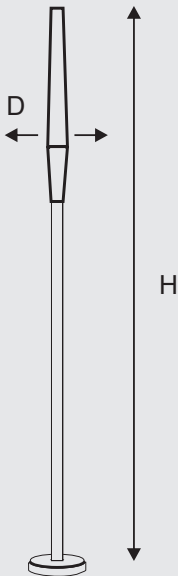

Specification				
Model	NL 4725-400	NL 4725-700	NL 4725-1000	NL 4725-1300
Power (W)	2W	2W	2W	2W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	24V DC	24V DC	24V DC	24V DC
Optics	SMD LED	SMD LED	SMD LED	SMD LED
Beam Angle	-	-	-	-
Housing	Aluminium Die Cast			
Finish	Rustic Brown/White/Dark Grey			
Color Rendering Index (CRI)	>80	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	D : 24mm H : 400mm	D : 24mm H : 700mm	D : 24mm H : 1000mm	D : 24mm H : 1300mm



Outdoor Architectural Lighting



Slimo

Pole Light

SLIMO Pole Light The pole light is equipped with high-power LEDs from OSRAM (Germany), known for their reliability and efficiency. These LEDs provide an extra-wide beam angle, ensuring broad and uniform illumination.

Slimo



Pole Lights

Features

- Aluminium Housing with Integrated MS Hot-Dip Galvanized Pipe.
- Hi-Power OSRAM LED
- Non-Corrosive SS Fasteners
- UV-Stabilized Polycarbonate Diffuser
- Silicon Gasket
- GI Mounting Plate with 360° Alignment
- Pre-Wired and Ready for Operation
- IP65 Rated with Pre-Wired Cable Gland

Applications

- SLIMO Pole Lights
- Driveways
- Pathways
- Building Surrounds
- Entrances
- Squares
- Gardens

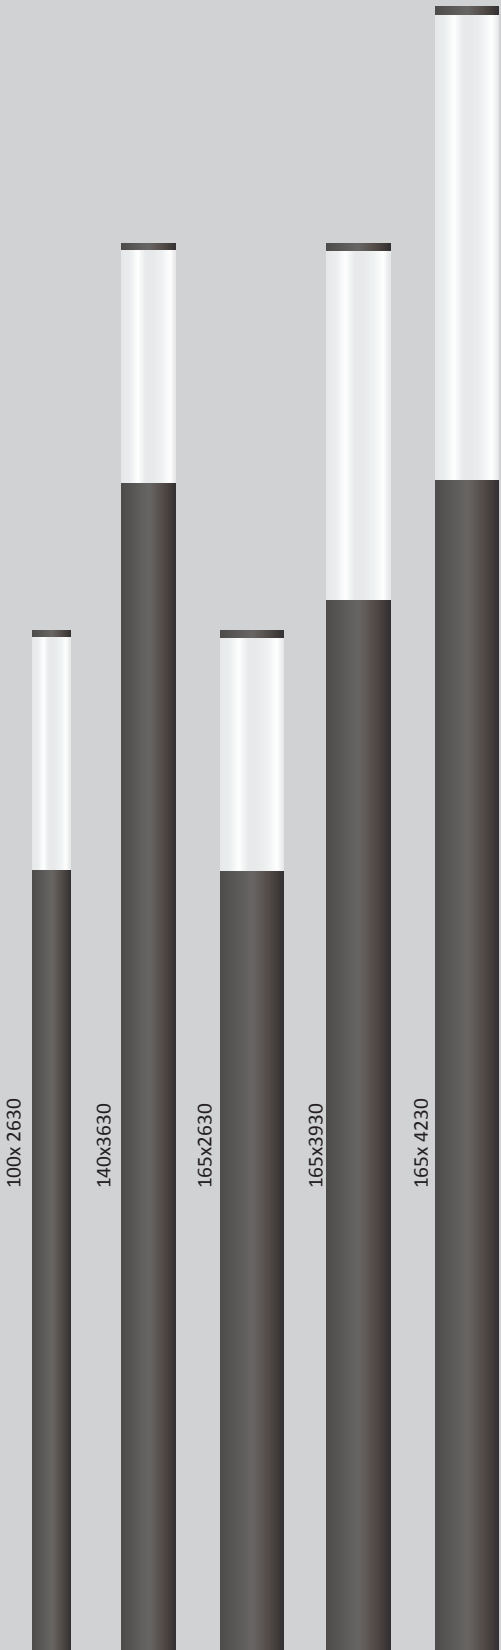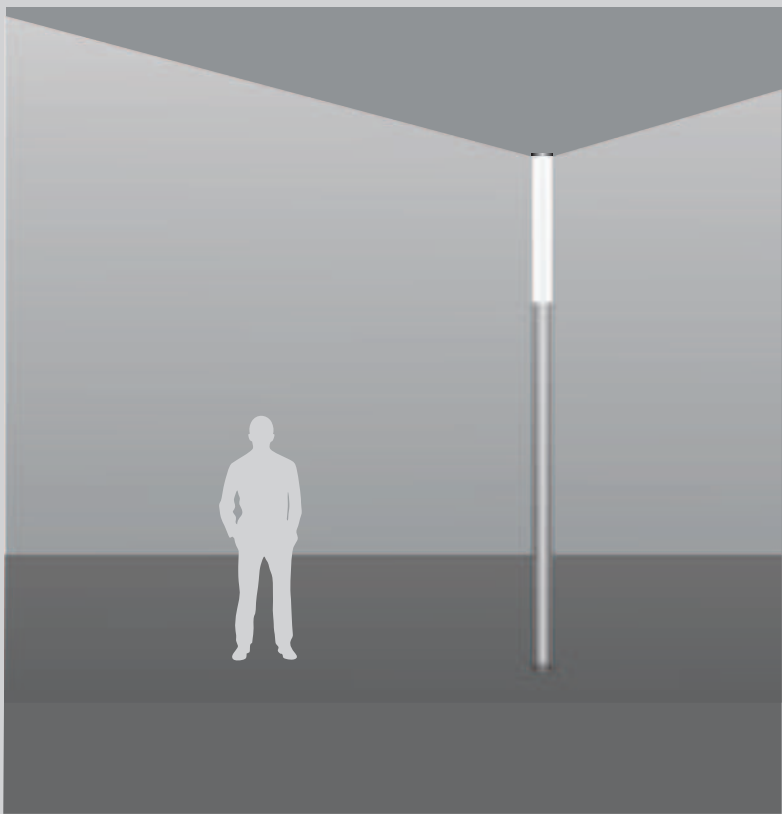


≥ 80 CRI



SLIMO - D100 SLIMO - D140

Specification	SLIMO - D100	
Model	NL 4325-CS H 2630	NL 4325-CS H 2930
	NL 4325-CS H 3630	NL 4325-CS H 3930
Power (W)	36W	50W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	Symmetrical	Symmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 100mm	D : 100mm
	H : 2630mm/ 3630mm	H : 2930mm / 3930mm
	OP: 600mm	OP: 900mm

Specification	SLIMO - D140	
Model	NL 4335-CS H 2630	NL 4335-CS H 2930
	NL 4335-CS H 3630	NL 4335-CS H 3930
Power (W)	36W	36W/50W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	Symmetrical	Symmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 140mm	D : 140mm
	H : 2630mm/ 3630mm	H : 2930mm/ 3930mm
	OP: 600mm	OP: 900mm

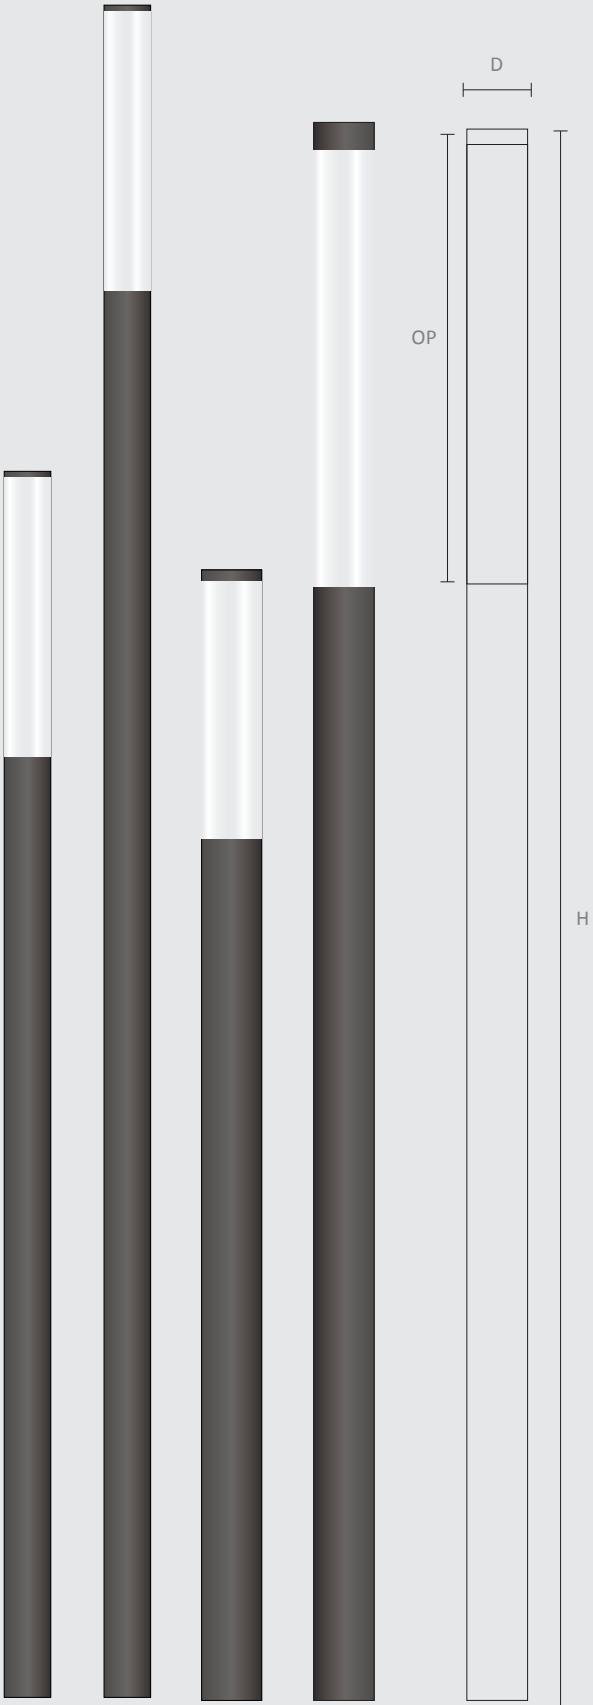


Slimo

Pole Lights

Specification	SLIMO - D140	
Model	NL 4335-CS H 3230	NL 4335-CS H 4230
Power (W)	60W	60W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	Symmetrical	Symmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 140mm H : 3230mm OP: 1200mm	D : 140mm H : 4230mm OP: 1200mm

Specification	SLIMO - D165	
Model	NL 4345-CS H 2630	NL 4345-CS H 2930
	NL 4345-CS H 3630	NL 4345-CS H 3930
Power (W)	50W	70W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	Symmetrical	Symmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 165mm H : 2630mm / 3630mm OP: 600mm	D : 165mm H : 2930mm/ 3930mm OP: 900mm

Specification	SLIMO - D165	
Model	NL 4345-CS H 3230	NL 4345-CS H 4230
Power (W)	90W	90W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	Symmetrical	Symmetrical
Housing	Aluminum Die Cast	Aluminum Die Cast
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	D : 165mm H : 3230mm OP: 1200mm	D : 165mm H : 4230mm OP: 1200mm

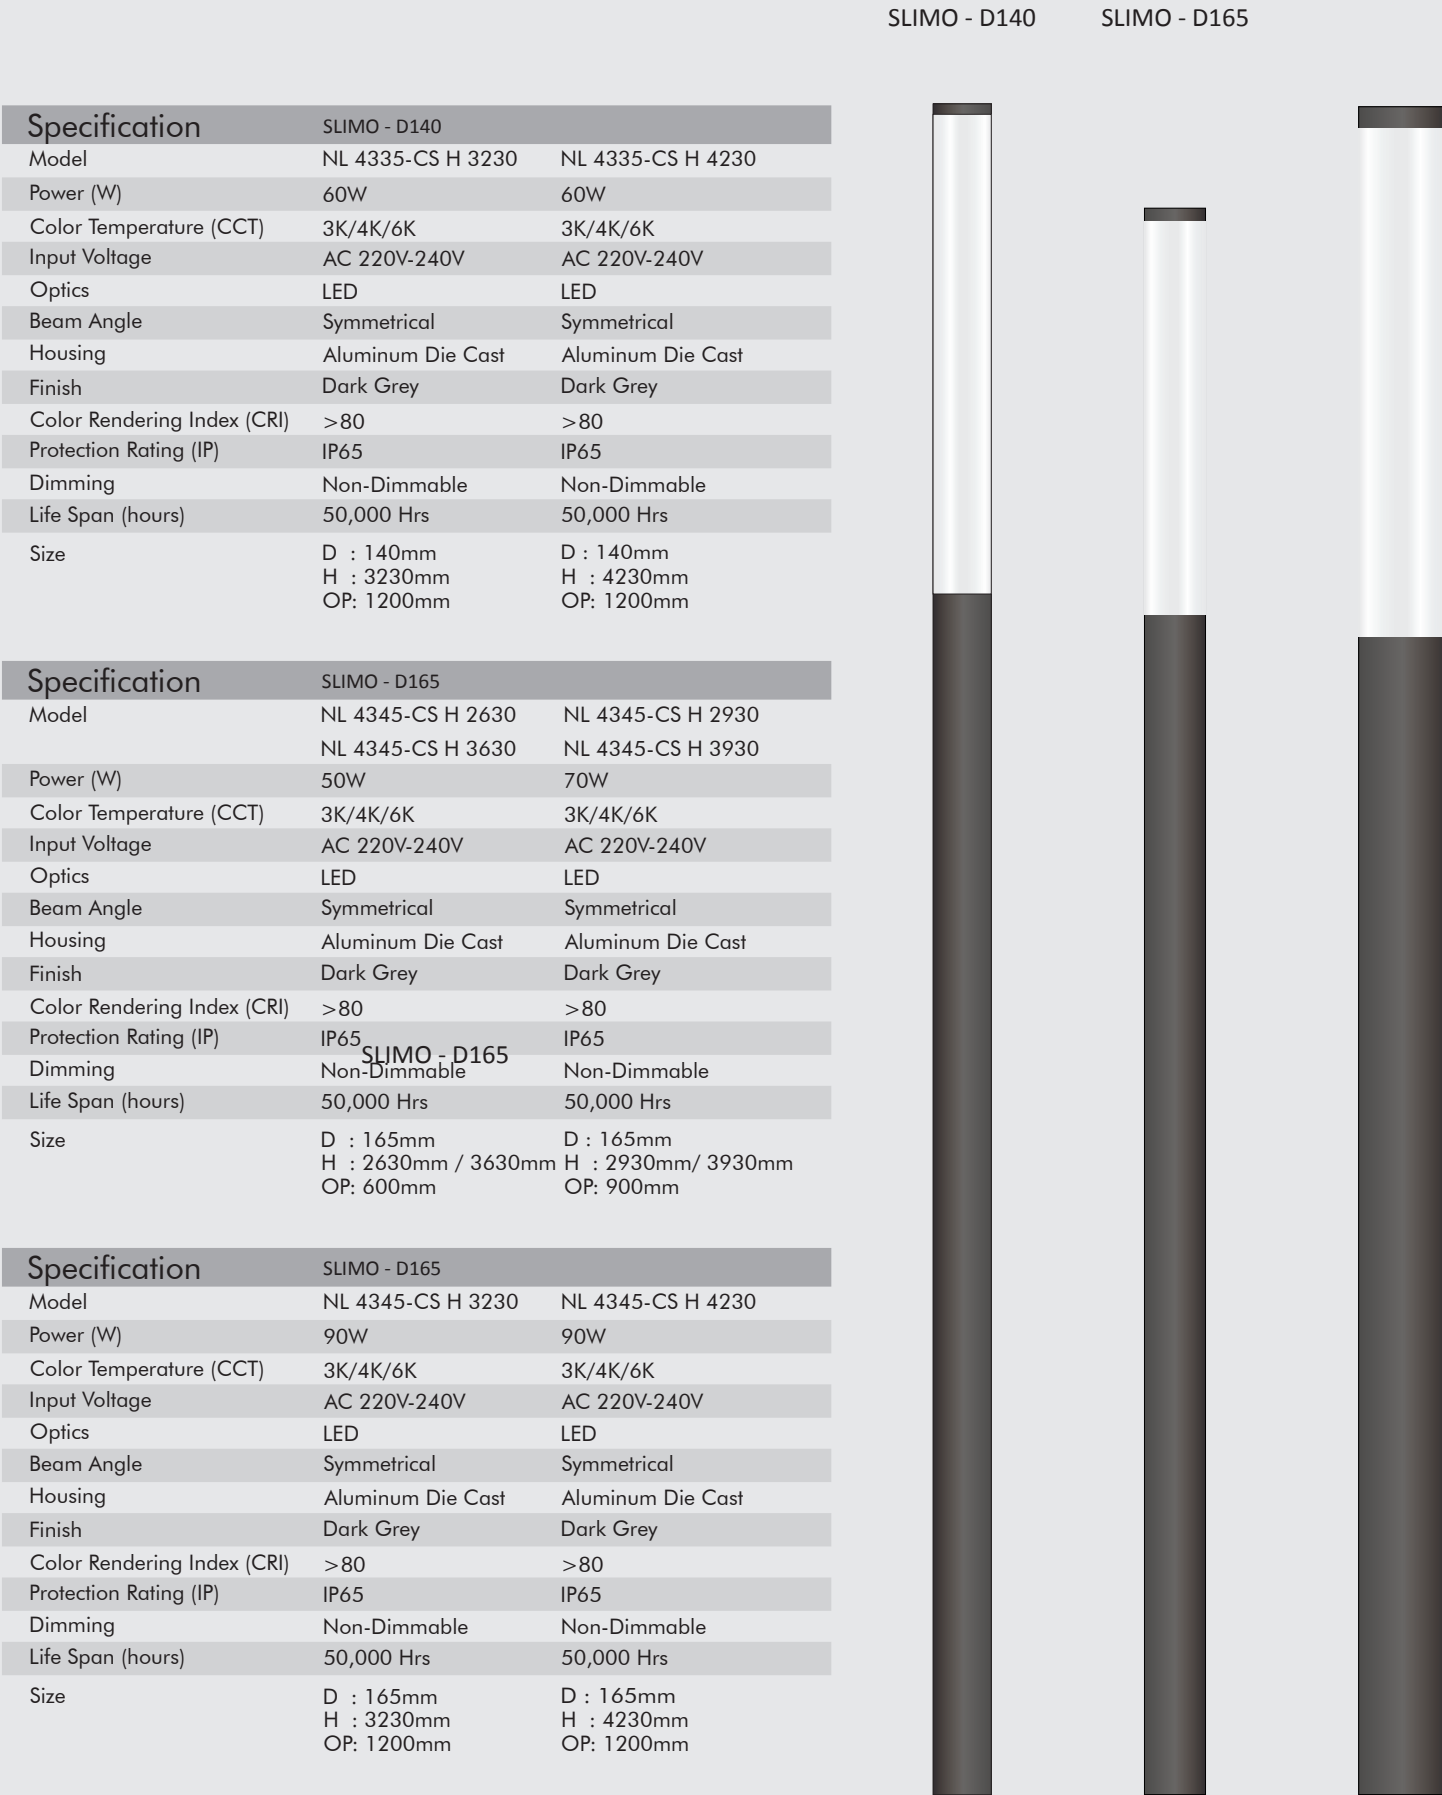




Outdoor Architectural Lighting

Glowspire Stick Lighting System

The GLOWSPIRE STICK - Lighting System is Aluminium & GI Construction: Combines aluminium and galvanized iron (GI) for a robust and corrosion-resistant housing, ensuring long-lasting performance in outdoor environments.

Pre-Wired Cable Gland with IP67 Rating: Supplied pre-wired with a cable gland that meets IP67 standards, providing protection against dust and water ingress, suitable for harsh weather conditions.

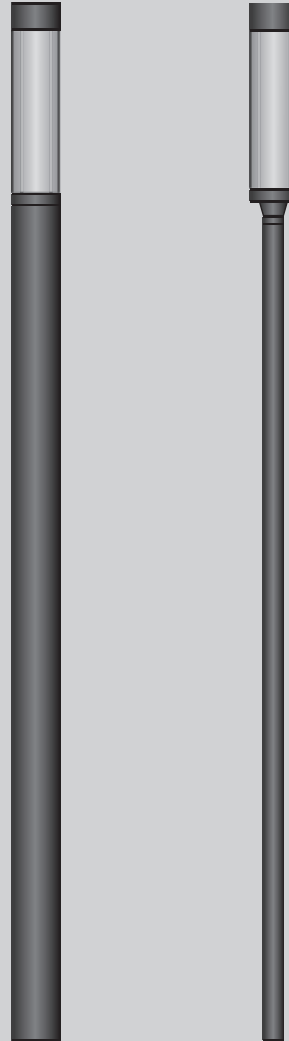

Glowspire Stick



Lighting System

Features

- Aluminum extruded Die cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners.
- Product supplied pre-wired cable gland compliance to IP67 rating
- Silicon gasket.

Applications

- Street Lighting
- Roadways
- Expressways
- Malls
- Residential Area Lighting
- Courtyards

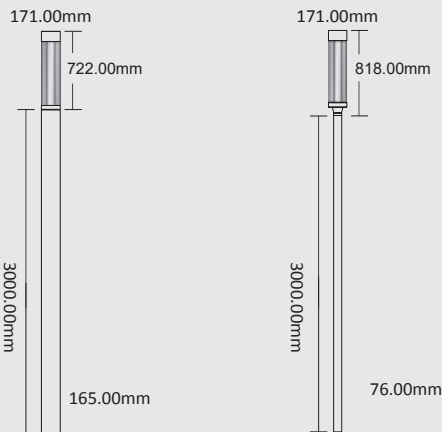


Specification		
Model	NL 4350	NL 4351
LED	Osram/Bridgelux/ Equivalent	Osram/Bridgelux/ Equivalent
Power (W)	30W/45W/60W	30W/45W/60W
Color Temperature (CCT)	3000K/4000K/6000K	3000K/4000K/6000K
Color Rendering Index (CRI)	≥80	≥80
Optics	Clear Diffuser	Clear Diffuser
Beam Angle	Symmetrical	Symmetrical
Housing	Aluminium & GI Pole	Aluminium & GI Pole
Finish	Dark Grey	Dark Grey
Input Voltage	220-240V AC	220-240V AC
Power Factor (PF)	>0.9	>0.9
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Head Dimension	Ø171x722MM	Ø171x818MM
Total Height	2M/3M/4M	2M/3M/4M

NL 4350



NL 4351





Outdoor Architectural Lighting

Marvello

Modern Street Light

Marvello - the slim square pole Street Light having LED driver as an integral part of the design, totally weather proof aesthetically contoured, one arm or two arm, Easy revamping by bottom opening for maintenance High Brightness, LED Light source do not pose any environment risks. Energy efficient range of luminaires for road and residential streets that combine a clean look with powerful performance & robustness.



NL 4412

Marvello



Modern Street Light

Features

- Aluminium extruded Die cast body
- Hi-Power SMD LED
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.
- Wall Thickness: Available in 2mm and 3mm

Applications

- Modern Street Light
- Smaller Roadways
- Private Driveways
- Residential Area Lighting
- Courtyards

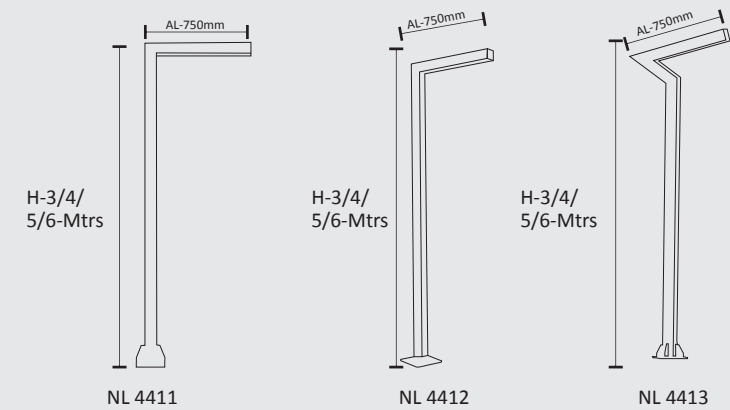

Specification			
Model	NL 4411	NL 4412	NL 4413
Power (W)	30W/48W/60W	30W/48W/60W	30W/48W/60W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED
Beam Angle	Type II	Type II	Type II
Housing	GI	GI	GI
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	AL : 750mm/ H : 3/4/5/6Mtrs	AL : 750mm/ H : 3/4/5/6Mtrs	AL : 750mm/ H : 3/4/5/6Mtrs

Marvello


Modern Street Light

Features

- Aluminium extruded Die cast body
- Hi-Power SMD LED
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.
- Wall Thickness: Available in 2mm and 3mm

Applications

- Modern Street Light
- Smaller Roadways
- Private Driveways
- Residential Area Lighting
- Courtyards

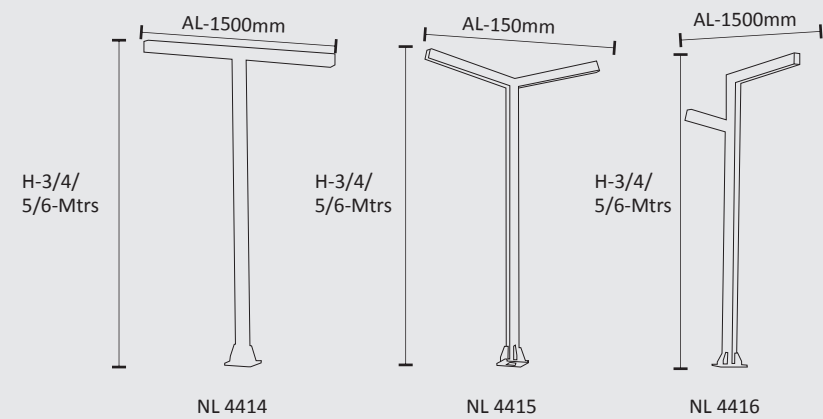









Specification			
Model	NL 4414	NL 4415	NL 4416
Power (W)	2x30W/2x48W/2x60W	2x30W/2x48W/2x60W	2x30W/2x48W/2x60W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED
Beam Angle	Type II	Type II	Type II
Housing	GI	GI	GI
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	AL : 1500mm/ H : 3/4/5/6Mtrs	AL : 1500mm/ H : 3/4/5/6Mtrs	AL : 1500mm/ H : 3/4/5/6Mtrs

Marvello



Modern Street Light

Features

- Aluminium extruded Die cast body
- Hi-Power SMD LED
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.
- Wall Thickness: Available in 2mm and 3mm

Applications

- Modern Street Light
- Smaller Roadways
- Private Driveways
- Residential Area Lighting
- Courtyards

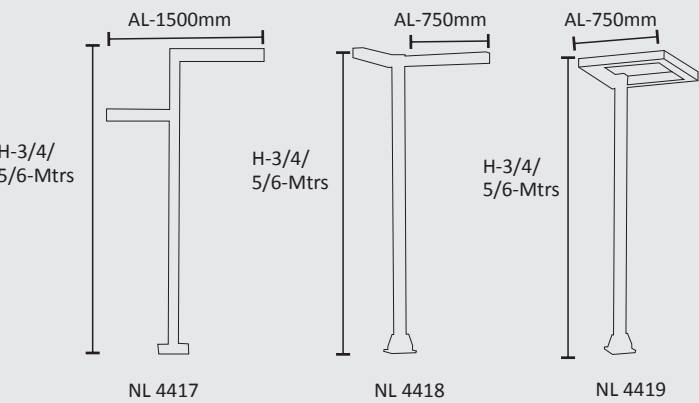

Specification			
Model	NL 4417	NL 4418	NL 4419
Power (W)	2x30W/2x48W/2x60W	2x30W/2x48W/2x60W	2x30W/2x48W/2x60W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V	AC 220V-240V
Optics	LED	LED	LED
Beam Angle	Type II	Type II	Type II
Housing	GI	GI	GI
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Size	AL : 1500mm/ H : 3/4/5/6Mtrs	AL : 750mm/ H : 3/4/5/6Mtrs	AL : 750mm/ H : 3/4/5/6Mtrs



100x100 Pole
NL 4419

Marvello



Modern Street Light

Features

- Aluminium extruded Die cast body
- Hi-Power SMD LED
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.
- Wall Thickness: 3mm

Applications

- Modern Street Light
- Smaller Roadways
- Private Driveways
- Residential Area Lighting
- Courtyards
- Public area lighting like parks & Squares.

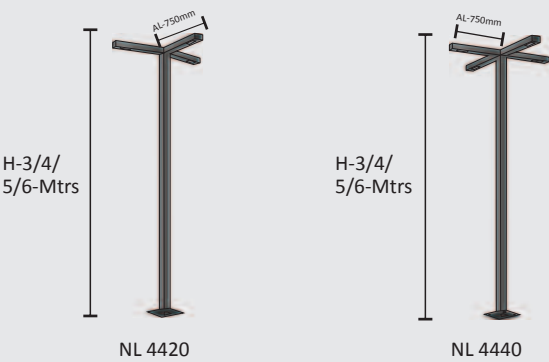

Specification		
Model	NL 4420	NL 4440
Power (W)	3x30W/3x48W/3x60W	4x30W/4x48W/4x60W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	Type II	Type II
Housing	GI	GI
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	AL : 750mm/ H : 3/4/5/6Mtrs	AL : 750mm/ H : 3/4/5/6Mtrs



100x100 Pole
NL 4420

Marvello



Modern Street Light

Features


- Aluminium extruded Die cast body
- Hi-Power SMD LED
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.
- Wall Thickness: Available in 2mm and 3mm

Applications

- Modern Street Light
- Smaller Roadways
- Private Driveways
- Residential Area Lighting
- Courtyards

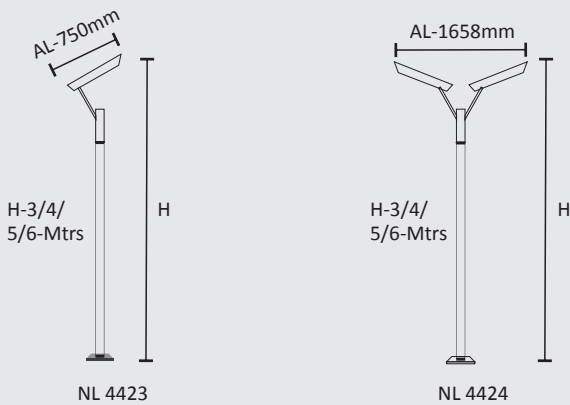


Specification		
Model	NL 4423	NL 4424
Power (W)	30W/48W/60W	2x30W/2x48W/2x60W
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K
Input Voltage	AC 220V-240V	AC 220V-240V
Optics	LED	LED
Beam Angle	Type II	Type II
Housing	GI	GI
Finish	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80
Protection Rating (IP)	IP65	IP65
Dimming	Non-Dimmable	Non-Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs
Size	AL : 750mm/ H : 3/4/5/6Mtrs	AL : 1658mm/ H : 3/4/5/6Mtrs

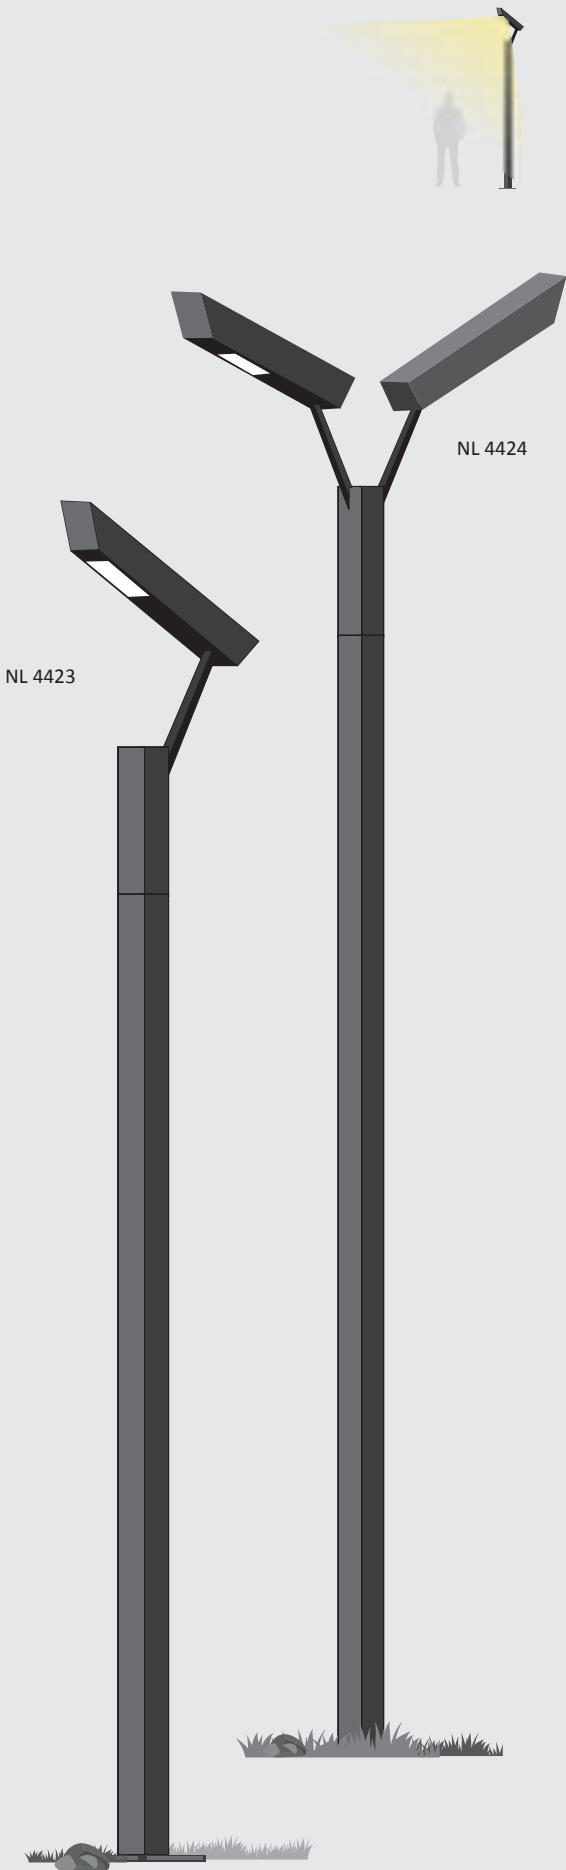



Outdoor Architectural Lighting

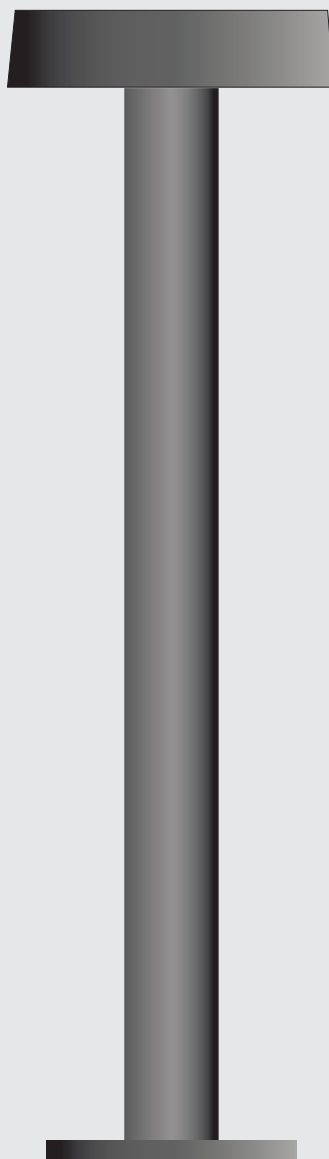

Atria

Bollard & Pole Light

Aluminium Housing High Corrosion Resistance The bollard is constructed from high-quality aluminium, which provides excellent resistance to corrosion. This makes it suitable for use in diverse environmental conditions, ensuring longevity & durability.

Atria

Bollard & Pole Light

Atria - Decorative light column designed to provide soft, uniform light. An elegant and efficient column with translucent diffuser enclosure to prevent glare and provide a unique, comfortable light choice. A sleek minimalist shape provides distinctive lighting effects by night and decorative urban effect during the day.

Equipped with high-power LEDs from OSRAM, known for their reliability and efficiency. These LEDs provide an extra-wide beam angle for broad and uniform.

Aluminium Housing with MS Hot-Dip Galvanized Pipe: The housing is made from aluminum, and the integrated mild steel (MS) pipe is hot-dip galvanized for enhanced corrosion resistance. The entire assembly is treated with UV-stabilized polyurethane liquid paint, making it suitable for outdoor use.



Atria


Bollard Light

Features

- Aluminium Housing with MS Hot-Dip Galvanized Pipe
- Hi-Power OSRAM (Germany) LED
- Non-Corrosive SS Fasteners
- Translucent Glass
- Silicon Gasket
- GI Mounting Plate
- Pre-Wired with Accessories
- IP65 Rated Cable Gland

Applications

- Street Lighting
- Smaller Roadways
- Expressways
- Private driveways
- Residential Area Lighting
- Courtyards
- Public area lighting like parks & Squares.



Specification	
Model	NL 4382
Power (W)	20W
Color Temperature (CCT)	3K/4K/6K
Input Voltage	AC 220V-240V
Optics	LED
Beam Angle	Symmetrical
Housing	Aluminum Die Cast
Finish	Dark Grey
Color Rendering Index (CRI)	>80
Protection Rating (IP)	IP65
Dimming	Non-Dimmable
Life Span (hours)	50,000 Hrs
Size	D :165mm/H :600/800mm

Atria

Pole Light

Features

- Aluminium Housing with MS Hot-Dip Galvanized Pipe
- Hi-Power OSRAM (Germany) LED
- Non-Corrosive SS Fasteners
- Translucent Glass
- Silicon Gasket
- GI Mounting Plate
- Pre-Wired with Accessories
- IP65 Rated Cable Gland

Applications

- Street Lighting
- Smaller Roadways
- Expressways
- Private driveways
- Residential Area Lighting
- Courtyards
- Public area lighting like parks & Squares.





IP65
RATED



≥ 80 CRI



Non
Dimmable



SMD LED



2
Years
Warranty



BIS



Available Finish


Specification	
Model	NL 4386
Power (W)	30W/45W/60W
Color Temperature (CCT)	3K/4K/6K
Input Voltage	AC 220V-240V
Optics	LED
Beam Angle	Symmetrical
Housing	Aluminum Die Cast
Finish	Dark Grey
Color Rendering Index (CRI)	>80
Protection Rating (IP)	IP65
Dimming	Non-Dimmable
Life Span (hours)	50,000 Hrs
Size	D :300mm H :3M/4M/5M/6M





Outdoor Architectural Lighting

NIRVANALIGHT®
Enlighten Your Life

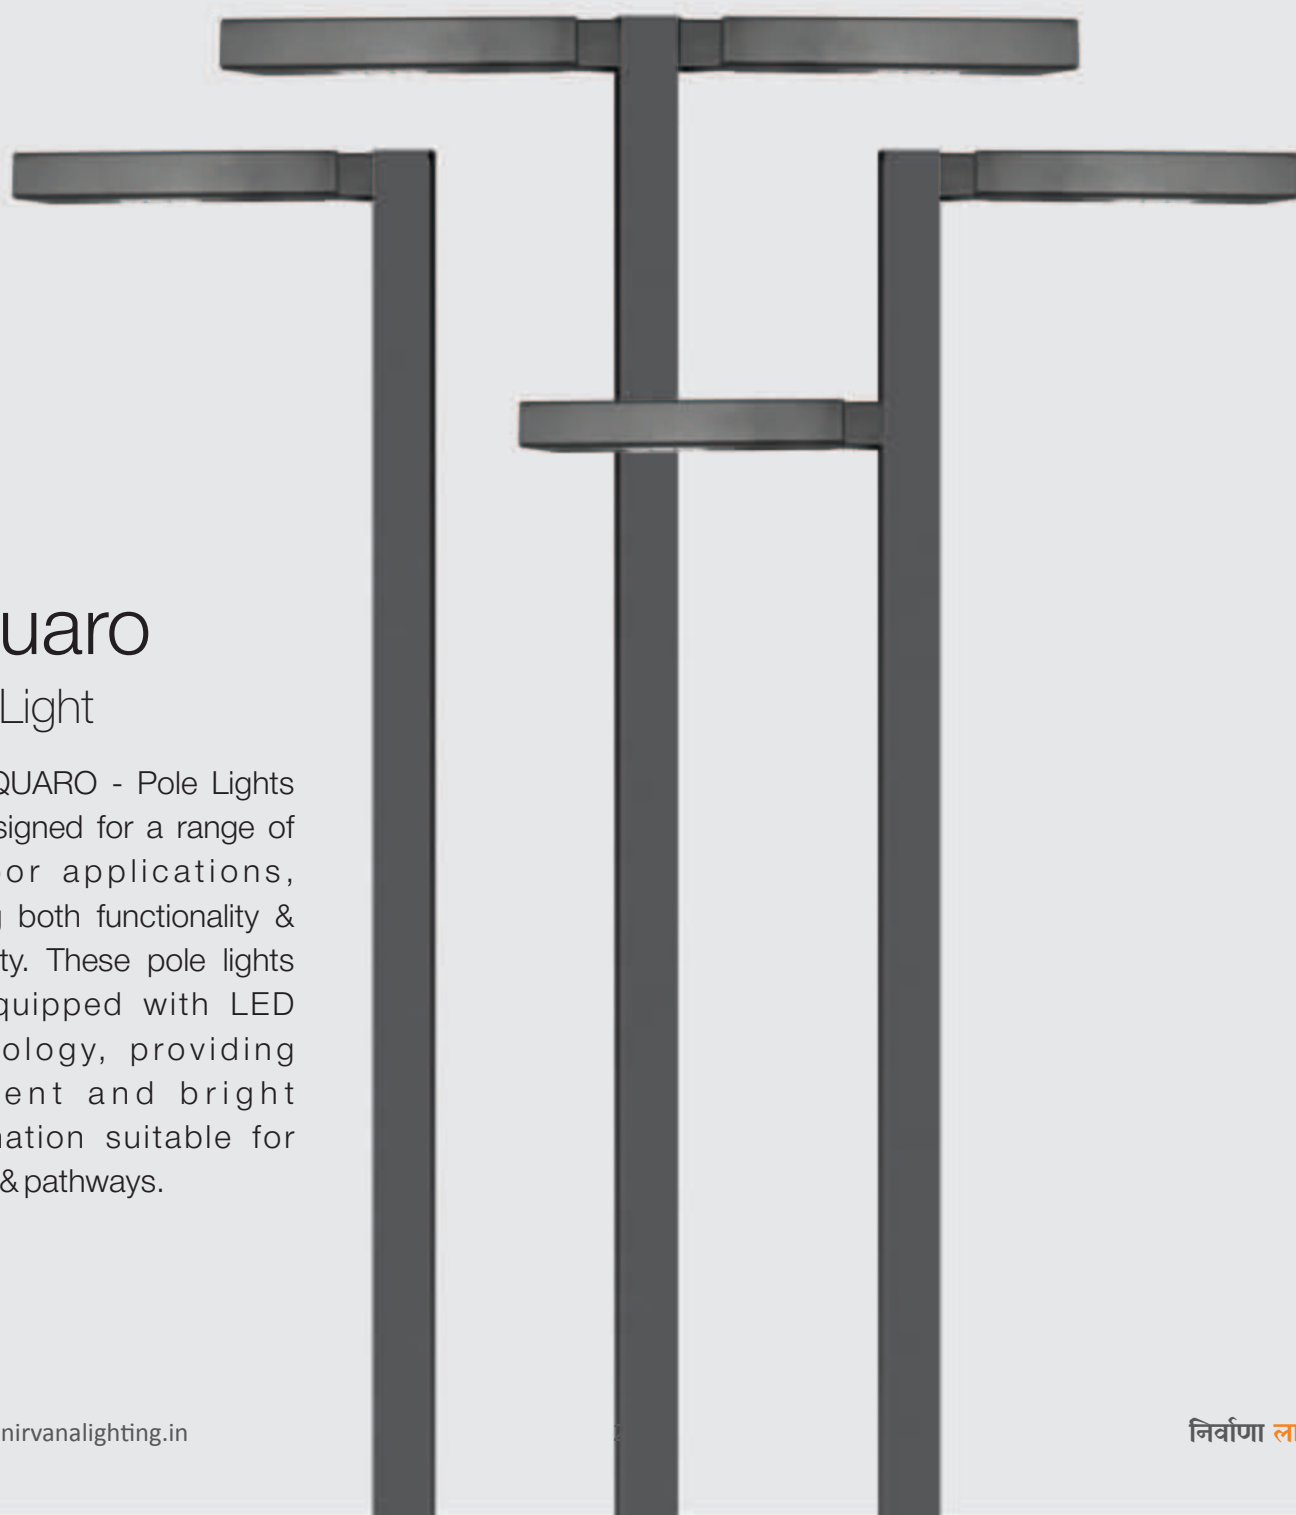

Squaro Pole Light

The SQUARO - Pole Lights are designed for a range of outdoor applications, offering both functionality & durability. These pole lights are equipped with LED technology, providing efficient and bright illumination suitable for streets & pathways.

Squaro


Pole Light

Features

- GI made Housing.
- Hi-power SMD LED
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.

Applications

- Street Lighting
- Roadways
- Expressways
- Private driveways
- Residential Area Lighting
- Courtyards
- Public area lighting like parks & Squares.

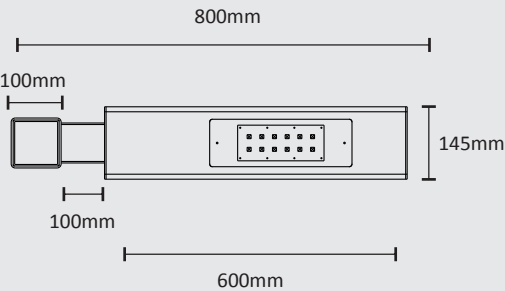

4421 - A (Square Pole)



4421 - B (Round Pole)




Specification		
MODEL	NL 4421 - A	NL 4421 - B
LED	OSRAM	OSRAM
POWER	30W/45W/60W	30W/45W/60W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥ 80	≥ 80
BEAM ANGLE	T1/T2/T3/T4	T1/T2/T3/T4
LUMINAIRE BODY	GI	GI
OPTICS	PMMA CLEAR OPTIC LENSES	PMMA CLEAR OPTIC LENSES
HOUSING COLOR	BLACK/DARK GREY	BLACK/DARK GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP	IP65	IP65
CONTROL & DIMMING	ON-OFF	ON-OFF
HEAD DIMENSION	800X145	800X145
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C

Squaro

Pole Light


Features

- GI made Housing.
- Hi-power SMD LED
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.



Applications


- Street Lighting
- Roadways
- Expressways
- Private driveways
- Residential Area Lighting
- Courtyards
- Public area lighting like parks & Squares.

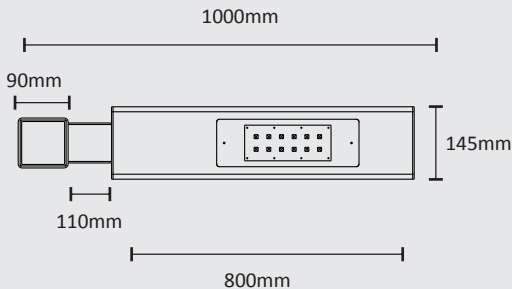

4422 - A (Square Pole)



4422 - B (Round Pole)



Specification		
MODEL	NL 4422 - A	NL 4422 - B
LED	OSRAM	OSRAM
POWER	2x30W/2x45W/2x60W	2x30W/2x45W/2x60W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80
BEAM ANGLE	T1/T2/T3/T4	T1/T2/T3/T4
LUMINAIRE BODY	GI	GI
OPTICS	PMMA CLEAR OPTIC LENSES	PMMA CLEAR OPTIC LENSES
HOUSING COLOR	BLACK/DARK GREY	BLACK/DARK GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP	IP65	IP65
CONTROL & DIMMING	ON-OFF	ON-OFF
HEAD DIMENSION	1000X145	1000X145
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C



Outdoor Architectural Lighting

MOON
NL 4392



Pole Size

Pole Height: 3-6 Metres

Pole Dia B. : 76MM/114MM



NEPTUNE
NL 4390



ORBIT
NL 4391



Galaxy Post Top Pole Light

Galaxy-Pole light for street and pathway luminaries, MS housing with high corrosion resistance. Stone wash surface treatment prior to painting process. glare free illumination of ground surface and are perfect for illuminating entrances, footpaths, public area, compound periphery as well as garden and landscape.

Glare-Free Illumination: Designed to provide glare-free lighting, the GALAXY Post Top Poles ensure comfortable and efficient illumination of the ground surface.



Galaxy Post Top Pole Light

Features

- GI & Aluminum housing.
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.

Applications

- Street Lighting
- Roadways
- Expressways
- Private driveways
- Residential Area Lighting
- Courtyards
- Public area lighting like parks & Squares.





NEPTUNE
NL 4390



ORBIT
NL 4391



MOON
NL 4392

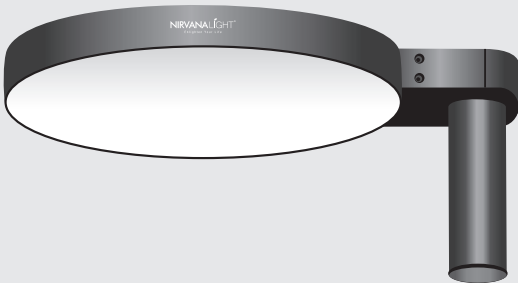

Specification			
MODEL	NL 4390	NL 4391	NL 4392
LED	Osram	Osram	Osram
POWER	30W/45W/60W	30W/45W/60W	30W/45W/60W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80	≥80
BEAM ANGLE	Wide-> 120°	Wide-> 120°	Wide-> 120°
LUMINAIRE BODY	ALUMINUM BODY	ALUMINUM BODY	ALUMINUM BODY
OPTICS	MILKY DIFFUSER GLASS/PRISMATIC		
HOUSING COLOR	BLACK / DARK GREY	BLACK / DARK GREY	BLACK / DARK GREY
INPUT	220-240V AC	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9	>0.9
IP	IP65	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off	On-Off
HEAD DIMENSION	350x42MM	350x42MM	350x42MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C	-20°C ~ 50°C

Outdoor Architectural Lighting

Pole Size

Pole Height: 3-6 Meters ▶

Pole Dia B. : 76MM/114MM ▶

Galaxy Post Top Pole Light

Galaxy-Pole light for street and pathway luminaries, MS housing with high corrosion resistance. Stone wash surface treatment prior to painting process. glare free illumination of ground surface and are perfect for illuminating entrances, footpaths, public area, compound periphery as well as garden and landscape.

Glare-Free Illumination: Designed to provide glare-free lighting, the GALAXY Post Top Poles ensure comfortable and efficient illumination of the ground surface.



Galaxy Post Top Pole Light

Features

- GI & Aluminum housing.
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.




Applications

- Street Lighting
- Roadways
- Expressways
- Private driveways
- Residential Area Lighting
- Courtyards
- Public area lighting like parks & Squares.




SATURN
NL 4393

MERCURY
NL 4394

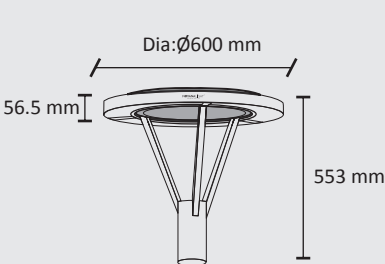

Specification		
MODEL	NL 4393	NL 4394
LED	Osram/Bridgelux/Equivalent	Osram/Bridgelux/Equivalent
POWER	40W/60W/90W	30W/45W/60W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80
BEAM ANGLE	Wide-> 120°	Wide-> 120°
LUMINAIRE BODY	Aluminum & GI Pole	Aluminum & GI Pole
OPTICS	MILKY DIFFUSER GLASS	MILKY DIFFUSER GLASS
HOUSING COLOR	BLACK / DARK GREY	BLACK / DARK GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off
HEAD DIMENSION	600x553MM	450x670MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C



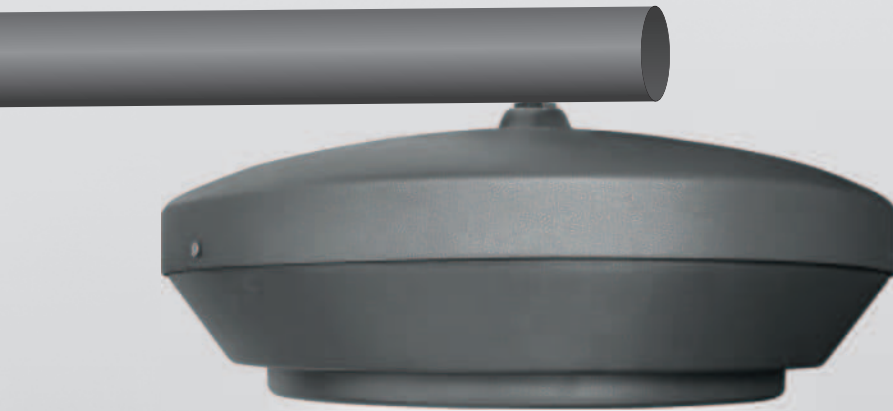

Introducing the Nirvana Pharo: Illuminating the Future of Outdoor Lighting

At Nirvana Light, we are proud to unveil our latest innovation in outdoor lighting—the Pharo. Designed to redefine the way we light up our streets, pathways, and open spaces, the Pharo Series combines cutting-edge LED technology with sleek, modern design to deliver unmatched performance and durability.

The Pharo is available in three versatile power options—50W, 75W, and 90W—making it the perfect solution for a wide range of outdoor applications. Whether it's illuminating busy streets, enhancing safety on footpaths, or providing reliable lighting for open grounds, the Pharo is engineered to excel in every environment.

Key Features of the Pharo Series:

High-Efficiency LED Technology: Delivers superior brightness while consuming less energy, ensuring cost-effective operation.

Robust & Durable Build: Designed to withstand harsh weather conditions, making it ideal for outdoor use.

Versatile Mounting Options: Easily attaches to poles & fixtures, offering flexible installation for any setting.

Eco-Friendly Design: Reduces carbon footprint with energy-saving performance and long-lasting durability.



High efficacy outdoor grade
Branded European origin Optics LED
of reputed brand LED Osram /Bridgelux /Cree




Dual light engine



Aluminum body
10/20 KVA Surge protection



IP 65 Branded LED Driver -
Fulham/BAG/Osram/Inventonics/Meanwell



High Power LED Driver



Pharo Pole Light

NIRVANALIGHT®
Enlighten Your Life


Pole Options



Pharo Pole Light

NIRVANALIGHT®
Enlighten Your Life

Pole Options

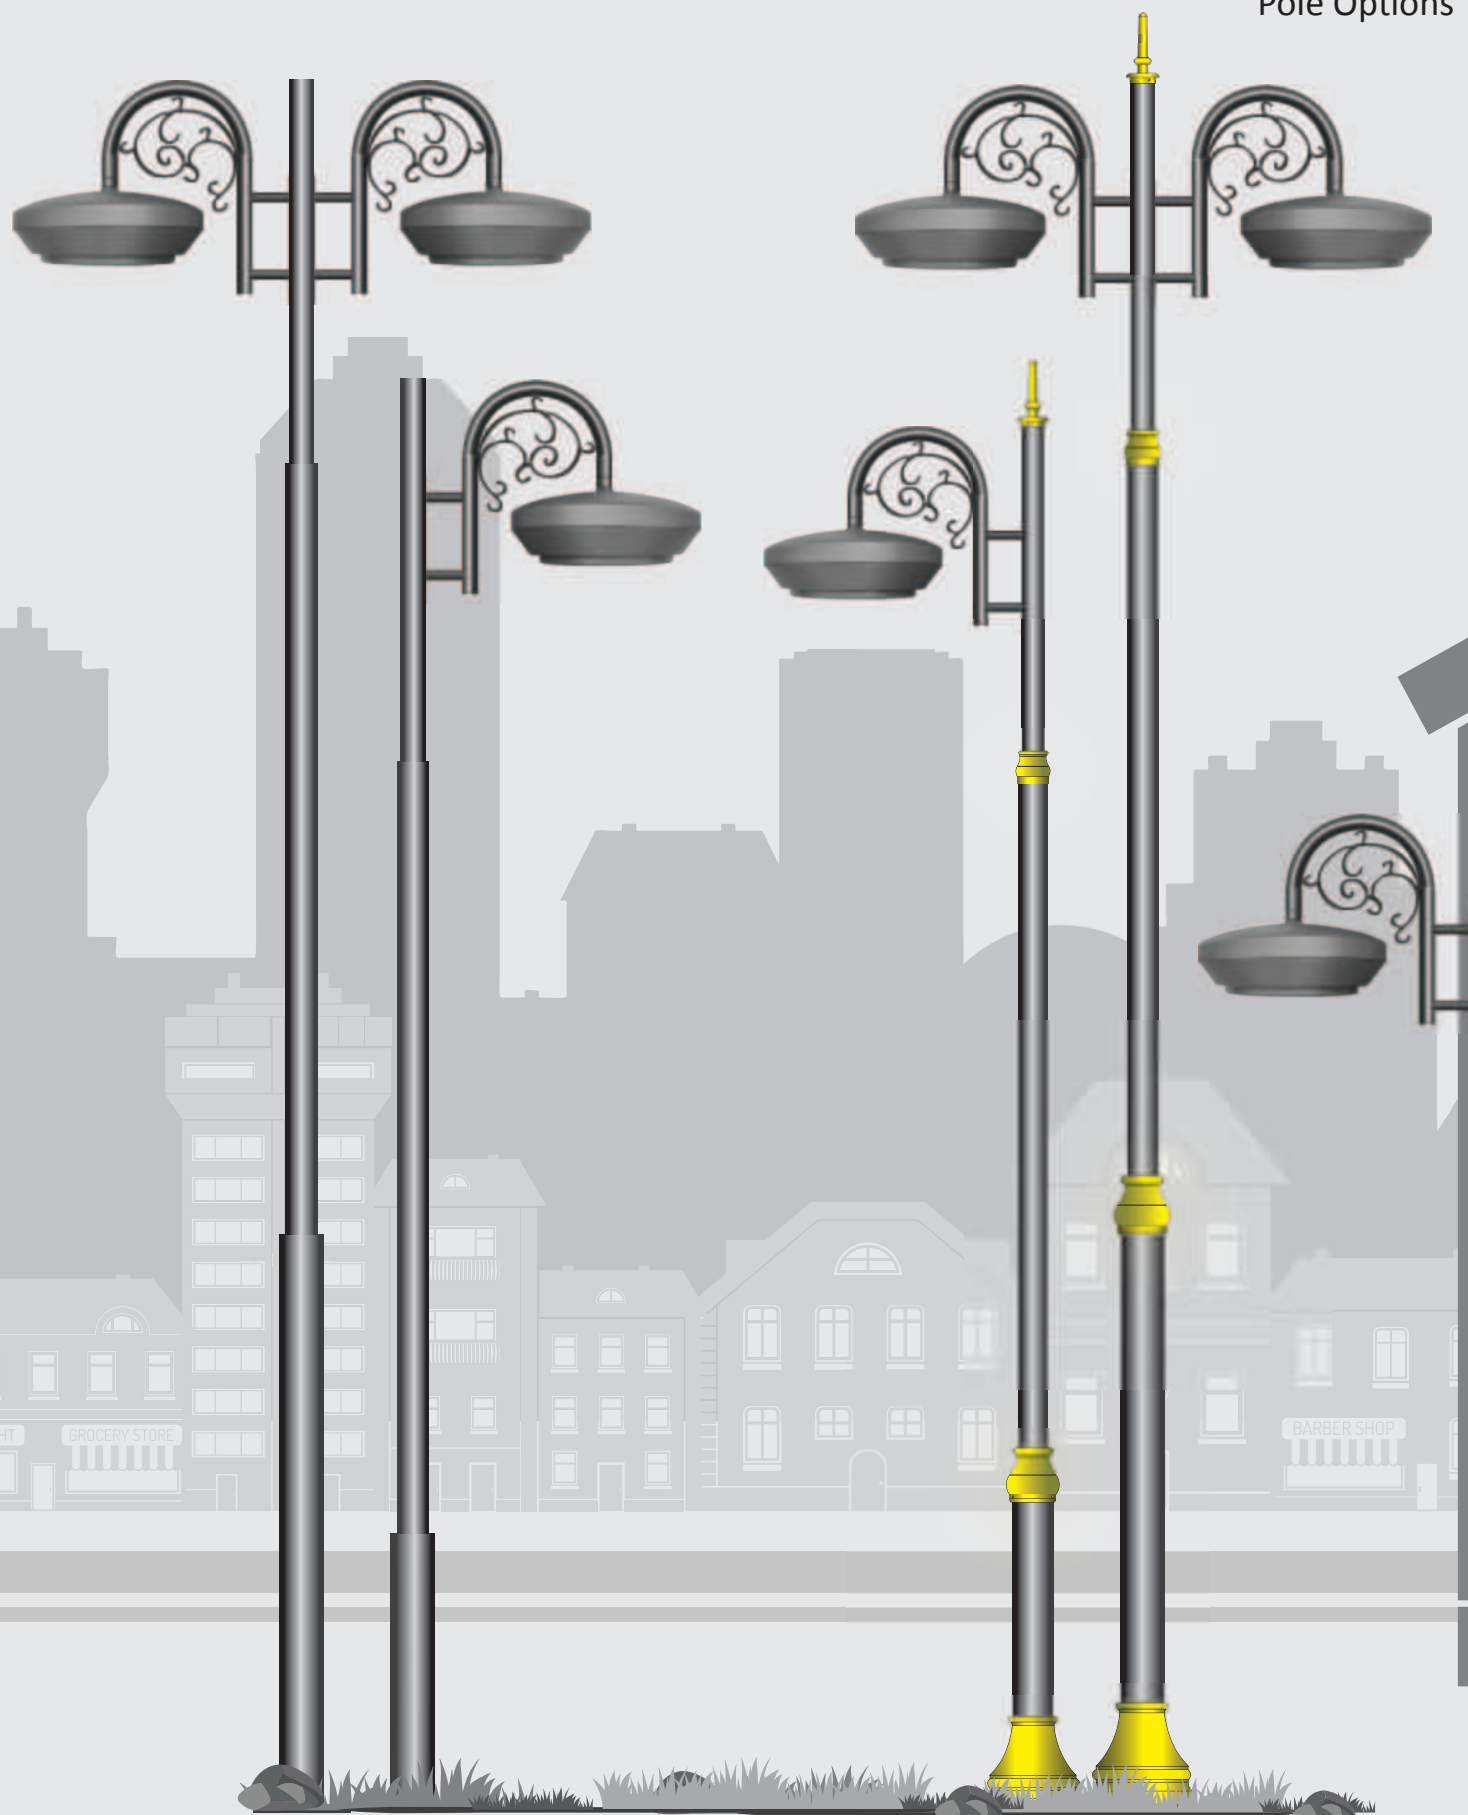

Pharo

Street Light

Features


- Aluminum body10/20 KVA Surge protection.
- High efficacy outdoor grade Branded European origin Optics.
- LED of reputed brand LED Osram/Bridgelux/Cree
- German brand Pure polyester powder coating tested for 1500 hrs *ATSM*.
- IP 65 Branded LED Driver - Eco LED or equivalent.
- High-temperature resistance Silicon gasket
- High-temperature resistance Silicon gasket
- Extruded aluminum heat sink
- SS fasteners

Applications

- Street
- Footpath
- Garden
- Public Park
- Business Park



Finish Available

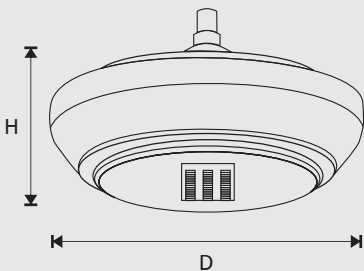

Suggested Installation Height



Specification			
Model	NL 4397	NL 4398	NL 4399
Power (W)	50W (Single light engine)	75W (Single light engine)	90W (Dual light engine)
Color Temperature (CCT)	3K/4K/6K	3K/4K/6K	3K/4K/6K
LED Type	SMD	SMD	SMD
Beam Angle	T2/T3	T2/T3	T2/T3
Finish	Dark Grey	Dark Grey	Dark Grey
Color Rendering Index (CRI)	>80	>80	>80
Protection Rating (IP)	IP65	IP65	IP65
Dimming	Non Dimmable	Non Dimmable	Non Dimmable
Life Span (hours)	50,000 Hrs	50,000 Hrs	50,000 Hrs
Luminous Flux	5250 Lm	7350 Lm	9450 Lm
Dimension	D : 425mm H : 177mm	D : 425mm H : 177mm	D : 425mm H : 177mm

BeaconGlow Pole Light

NIRVANALIGHT®
Enlighten Your Life



BeaconGlow

Pole Light

Features

- Aluminum body10/20 KVA Surge protection.
- High efficacy outdoor grade Branded European origin Optics.
- LED of reputed brand LED Osram/Bridgelux/Cree
- German brand Pure polyester powder coating tested for 1500 hrs ATSM.
- IP 65 Branded LED Driver - Eco LED or equivalent.
- High-temperature resistance Silicon gasket
- High-temperature resistance Silicon gasket
- Extruded aluminum heat sink
- SS fasteners

Applications

- Street
- Footpath
- Garden
- Public Park
- Business Park



Finish Available



Specification		
MODEL	NL 4395	NL 4396
LED	Osram/Bridgelux/Equivalent	Osram/Bridgelux/Equivalent
POWER	30W/50W	30W/50W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80
BEAM ANGLE	Wide-> 120°	Wide-> 120°
LUMINAIRE BODY	Spun Aluminum	Spun Aluminum
OPTICS	Clear Acrylic	Clear Acrylic
HOUSING COLOR	Dark Grey	Dark Grey
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off
HEAD DIMENSION	503x553MM	503x852MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C




Outdoor Architectural Lighting

Modern Street Light

The housing is made from galvanized iron (GI), offering robust construction and high resistance to corrosion for durability in outdoor environments. The housing is made from galvanized iron (GI), offering robust construction and high resistance to corrosion for durability in outdoor environments.

The product is supplied pre-wired with a cable gland that meets IP67 standards, providing protection against dust and water ingress, making it suitable for harsh weather conditions. Includes a silicon gasket to enhance the weatherproof sealing of the luminaires, contributing to its IP67 rating and ensuring reliable performance in various environmental conditions.

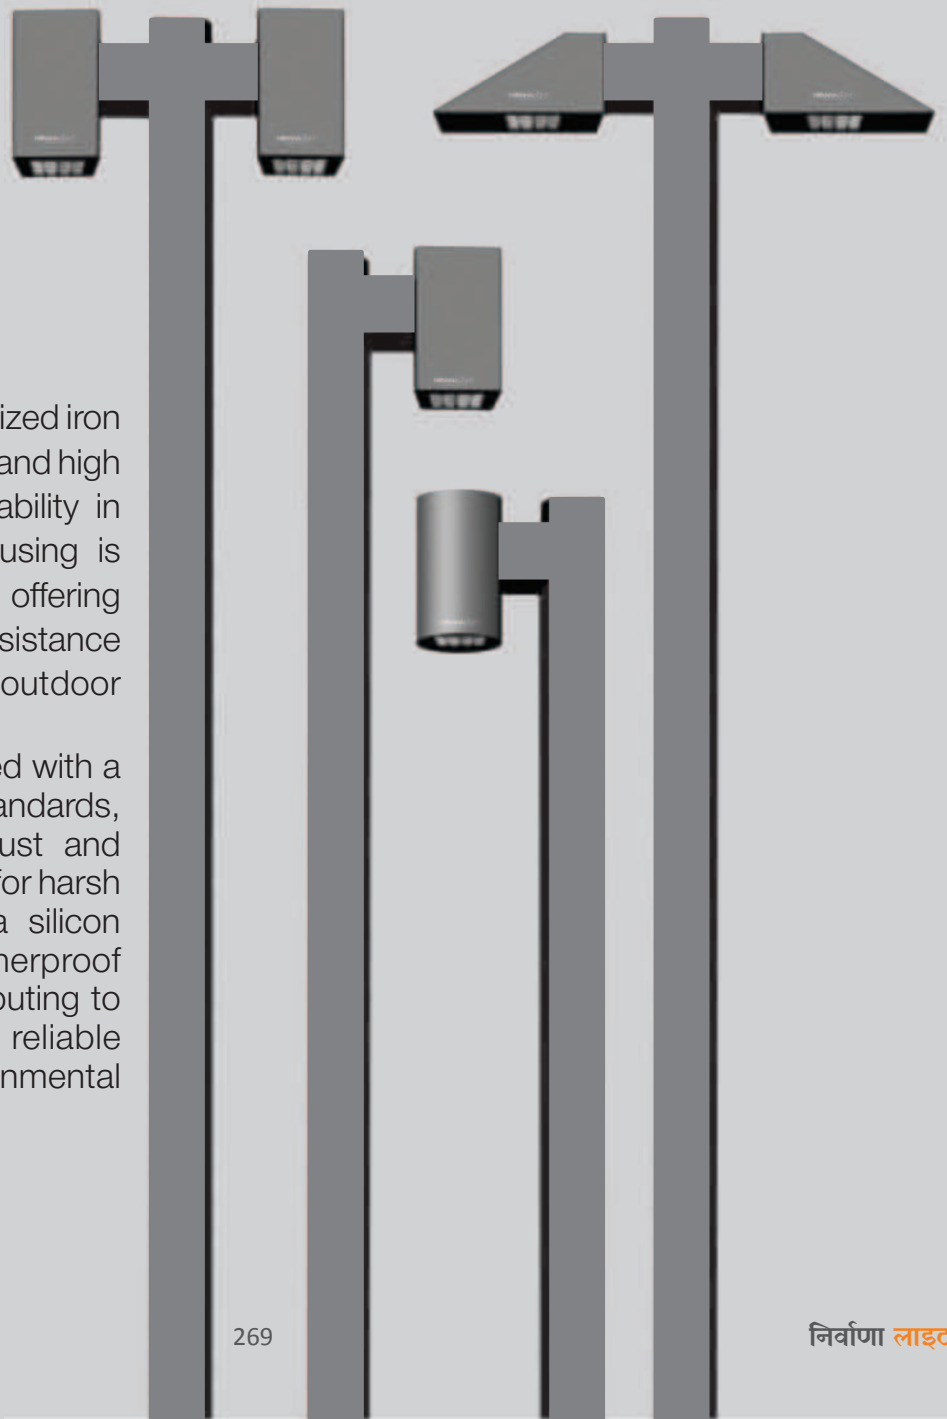

Modern Type-A


Street Light

Features

- GI made housing.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.

Applications

- Public area lighting like parks & squares
- Courtyards
- Mini street lighting
- Residential area lighting
- Smaller roadways
- Private driveways

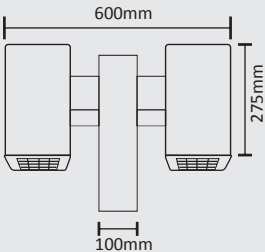

Specification			
MODEL	NL 4425	NL 4426 - S/R	NL 4427 - S/R
LED	Osram	Osram	Osram
POWER	30W/45W	30W/45W	2x30W/2x45W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80	≥80
BEAM ANGLE	T1/T2/T3/T4	T1/T2/T3/T4	T1/T2/T3/T4
LUMINAIRE BODY	GI	GI	GI
OPTICS	PMMA CLEAR OPTIC LENSES		
HOUSING COLOR	BLACK / DARK GREY	BLACK / DARK GREY	BLACK / DARK GREY
INPUT	220-240V AC	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9	>0.9
IP	IP65	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off	On-Off
HEAD DIMENSION	250x275MM	350x275MM	600x275MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C	-20°C ~ 50°C

Modern Type-B



Street Light

Features

- GI made housing.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.

Applications

- Public area lighting like parks & squares
- Courtyards
- Mini street lighting
- Residential area lighting
- Smaller roadways
- Private driveways




NL 4428




NL 4429 S



NL 4430 S



NL 4429 R

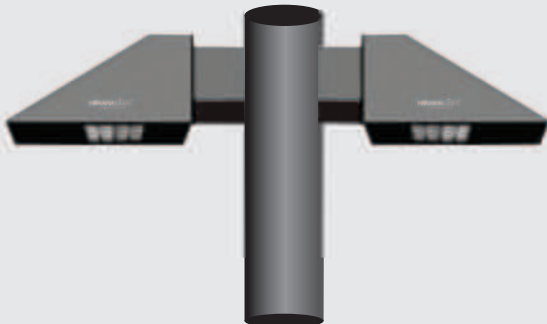

NL 4430 R



Specification			
MODEL	NL 4428	NL 4429- S/R	NL 4430 - S/R
LED	Osram	Osram	Osram
POWER	30W/45W	30W/45W	2x30W/2x45W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80	≥80
BEAM ANGLE	T1/T2/T3/T4	T1/T2/T3/T4	T1/T2/T3/T4
LUMINAIRE BODY	GI	GI	GI
OPTICS	PMMA CLEAR OPTIC LENSES		
HOUSING COLOR	BLACK / DARK GREY	BLACK / DARK GREY	BLACK / DARK GREY
INPUT	220-240V AC	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9	>0.9
IP	IP65	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off	On-Off
HEAD DIMENSION	400x150MM	600x150MM	900x150MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C	-20°C ~ 50°C



Modern Type-C


Street Light

Features


- GI made housing.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.

Applications

- Public area lighting like parks & squares
- Courtyards
- Mini street lighting
- Residential area lighting
- Smaller roadways
- Private driveways



NL 4431



NL 4432 S



NL 4433 S



NL 4432 R



NL 4433 R




Specification			
MODEL	NL 4431	NL 4432	NL 4433
LED	Osram	Osram	Osram
POWER	30W/45W	30W/45W	2x30W/45W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80	≥80
BEAM ANGLE	T1/T2/T3/T4	T1/T2/T3/T4	T1/T2/T3/T4
LUMINAIRE BODY	GI Pole	GI Pole	GI Pole
OPTICS	PMMA CLEAR OPTIC LENSES		
HOUSING COLOR	BLACK / DARK GREY	BLACK / DARK GREY	BLACK / DARK GREY
INPUT	220-240V AC	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9	>0.9
IP	IP65	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off	On-Off
HEAD DIMENSION	265x275MM	365x275MM	630x275MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C	-20°C ~ 50°C




Outdoor Architectural Lighting

Modern Street Light

MODERN – STREET LIGHT
Specifically designed for wall-mounted and pathway lighting, making it versatile for different installation needs. **MS Housing with High Corrosion Resistance:** Features a mild steel (MS) housing that is treated for high resistance to corrosion, ensuring durability and long-lasting performance in outdoor environments. **Stone Wash Surface Treatment:** The surface undergoes a stone wash treatment before the painting process, which enhances the finish and increases the fixture's durability. **Glare-Free Illumination:** Provides glare-free lighting to ensure a comfortable and effective illumination of the ground surface.

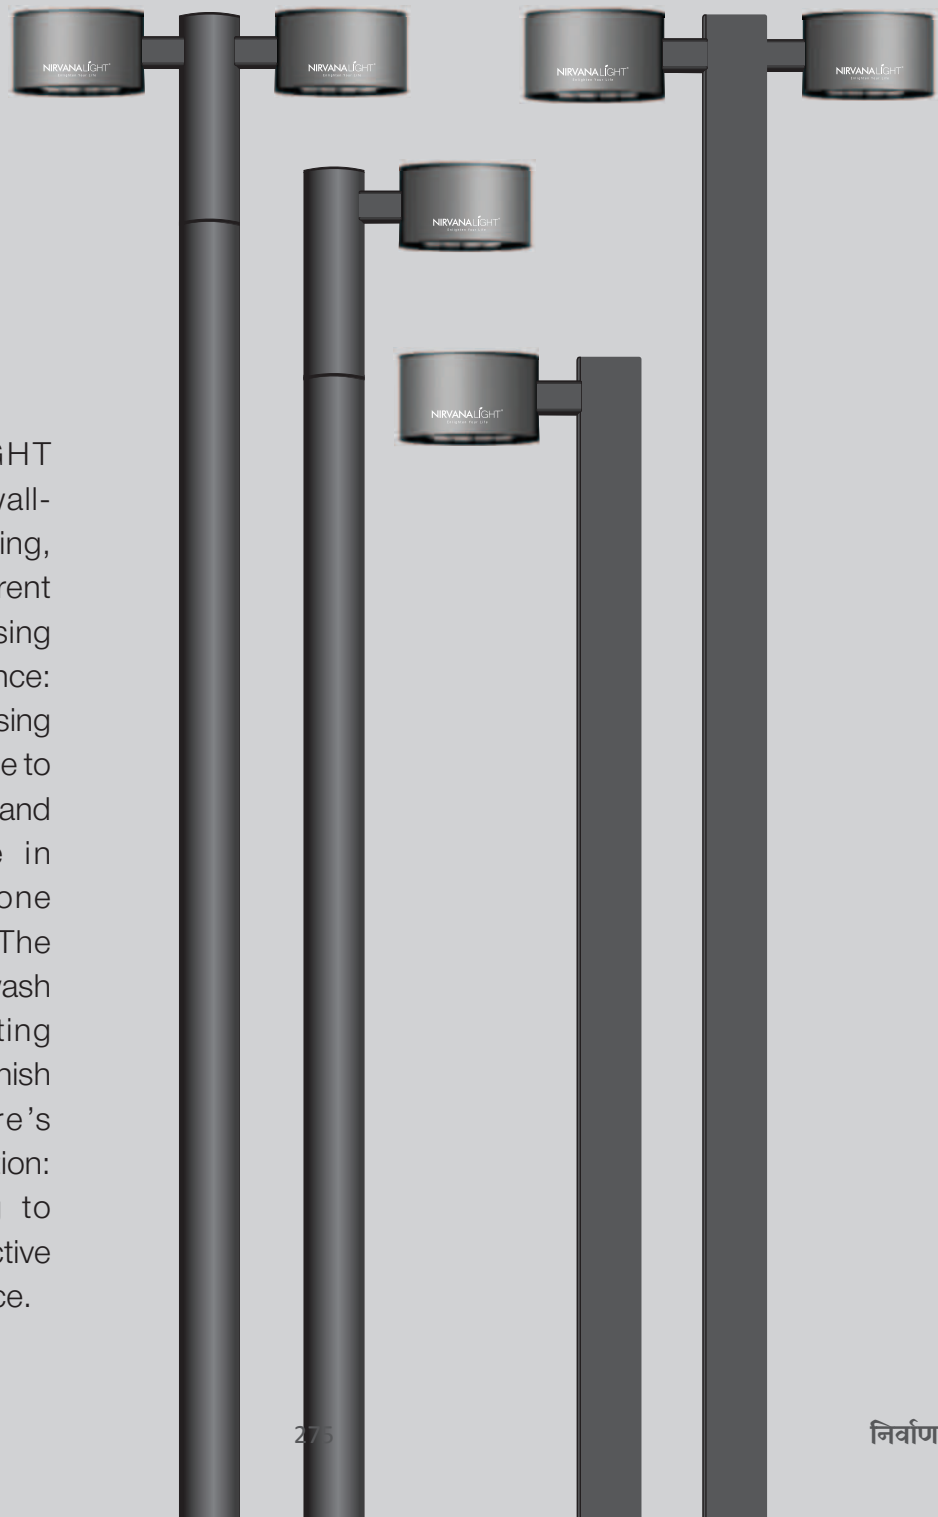

Modern Type Drums-R Street Light



Features


- GI made housing.
- Non-corrosive SS fasteners.
- Product supplied pre-wired cable gland compliance to IP67 rating
- Silicon gasket.

Applications


- Public area lighting like parks & squares
- Courtyards
- Mini street lighting
- Residential area lighting
- Smaller roadways
- Private driveways



NL 4435

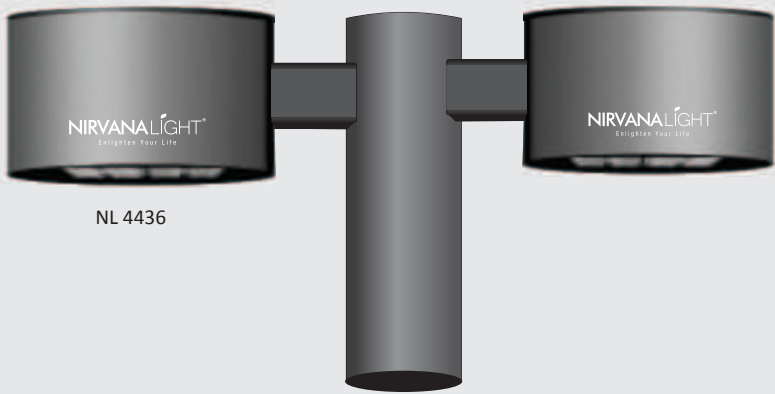

NL 4436



Specification		
MODEL	NL 4435	NL 4436
LED	Osram	Osram
POWER	30W/45W	2x30W/45W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80
BEAM ANGLE	T1/T2/T3/T4	T1/T2/T3/T4
LUMINAIRE BODY	GI	GI
OPTICS	PMMA CLEAR OPTIC LENSES	
HOUSING COLOR	BLACK/DARK GREY	BLACK/DARK GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off
HEAD DIMENSION	380x120MM	600x120MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C


Modern Type Drums-S Street Light

Features

- GI made housing.
- Non-corrosive SS fasteners.
- Product supplied pre-wired cable gland compliance to IP67 rating
- Silicon gasket.

Applications

- Public area lighting like parks & squares
- Courtyards
- Mini street lighting
- Residential area lighting
- Smaller roadways
- Private driveways



NL 4437



NL 4438




Specification		
MODEL	NL 4437	NL 4438
LED	Osram	Osram
POWER	30W/45W	2x30W/45W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80
BEAM ANGLE	T1/T2/T3/T4	T1/T2/T3/T4
LUMINAIRE BODY	GI	GI
OPTICS	PMMA CLEAR OPTIC LENSES	
HOUSING COLOR	BLACK/DARK GREY	BLACK/DARK GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off
HEAD DIMENSION	380x120MM	600x120MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C



Outdoor Architectural Lighting

Vertilux Bollards & Poles Lighting


The VERTILUX - Bollards & Poles are an excellent choice for various outdoor lighting needs, combining durability, performance, and aesthetic appeal. Designed to provide glare-free lighting, ensuring comfortable and efficient illumination of the ground surface.

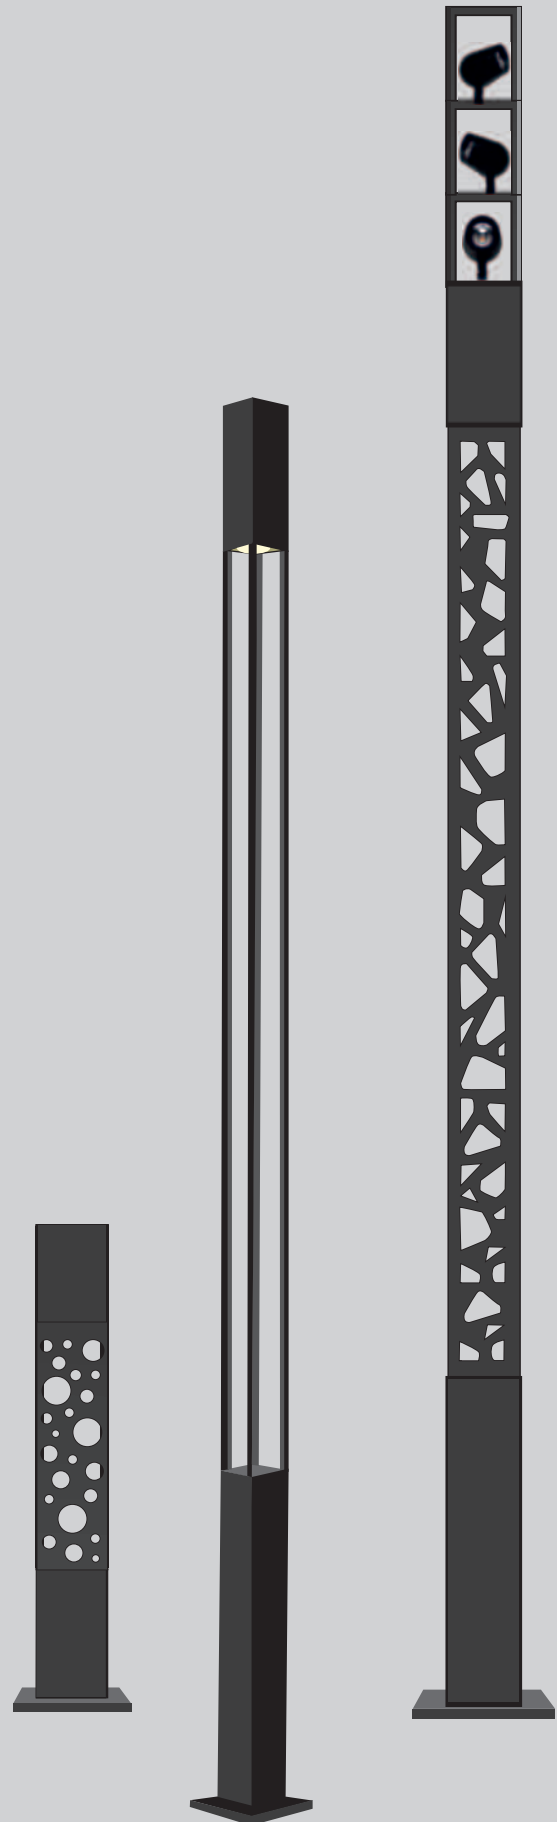

Vertiux Bollards & Poles Lights

Bollards- 150x150


NL 4461-ST height 1 mtr	NL 4461-LD1 height 1 mtr	NL 4461-LD2 height 1 mtr	NL 4461-LD3 height 1 mtr	NL 4461-LD4 height 1 mtr	NL 4461-LD5 height 1 mtr
----------------------------	-----------------------------	-----------------------------	-----------------------------	-----------------------------	-----------------------------

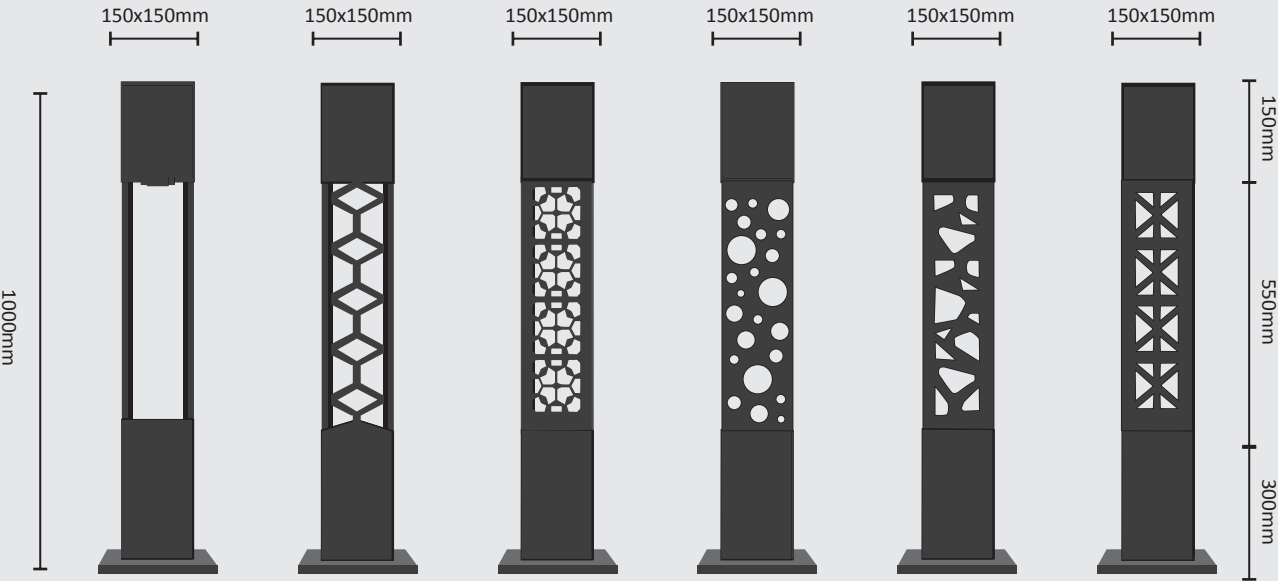

Vertiux Bollards & Poles Lights



Design - Laser Cut -150x150

NL 4462-150-ST height 3 mtr	NL 4462-150-LD1 height 3 mtr	NL 4462-150-LD2 height 3 mtr	NL 4462-150-LD3 height 3 mtr	NL 4462-150-LD4 height 3 mtr	NL 4462-150-LD5 height 3 mtr
--------------------------------	---------------------------------	---------------------------------	---------------------------------	---------------------------------	---------------------------------


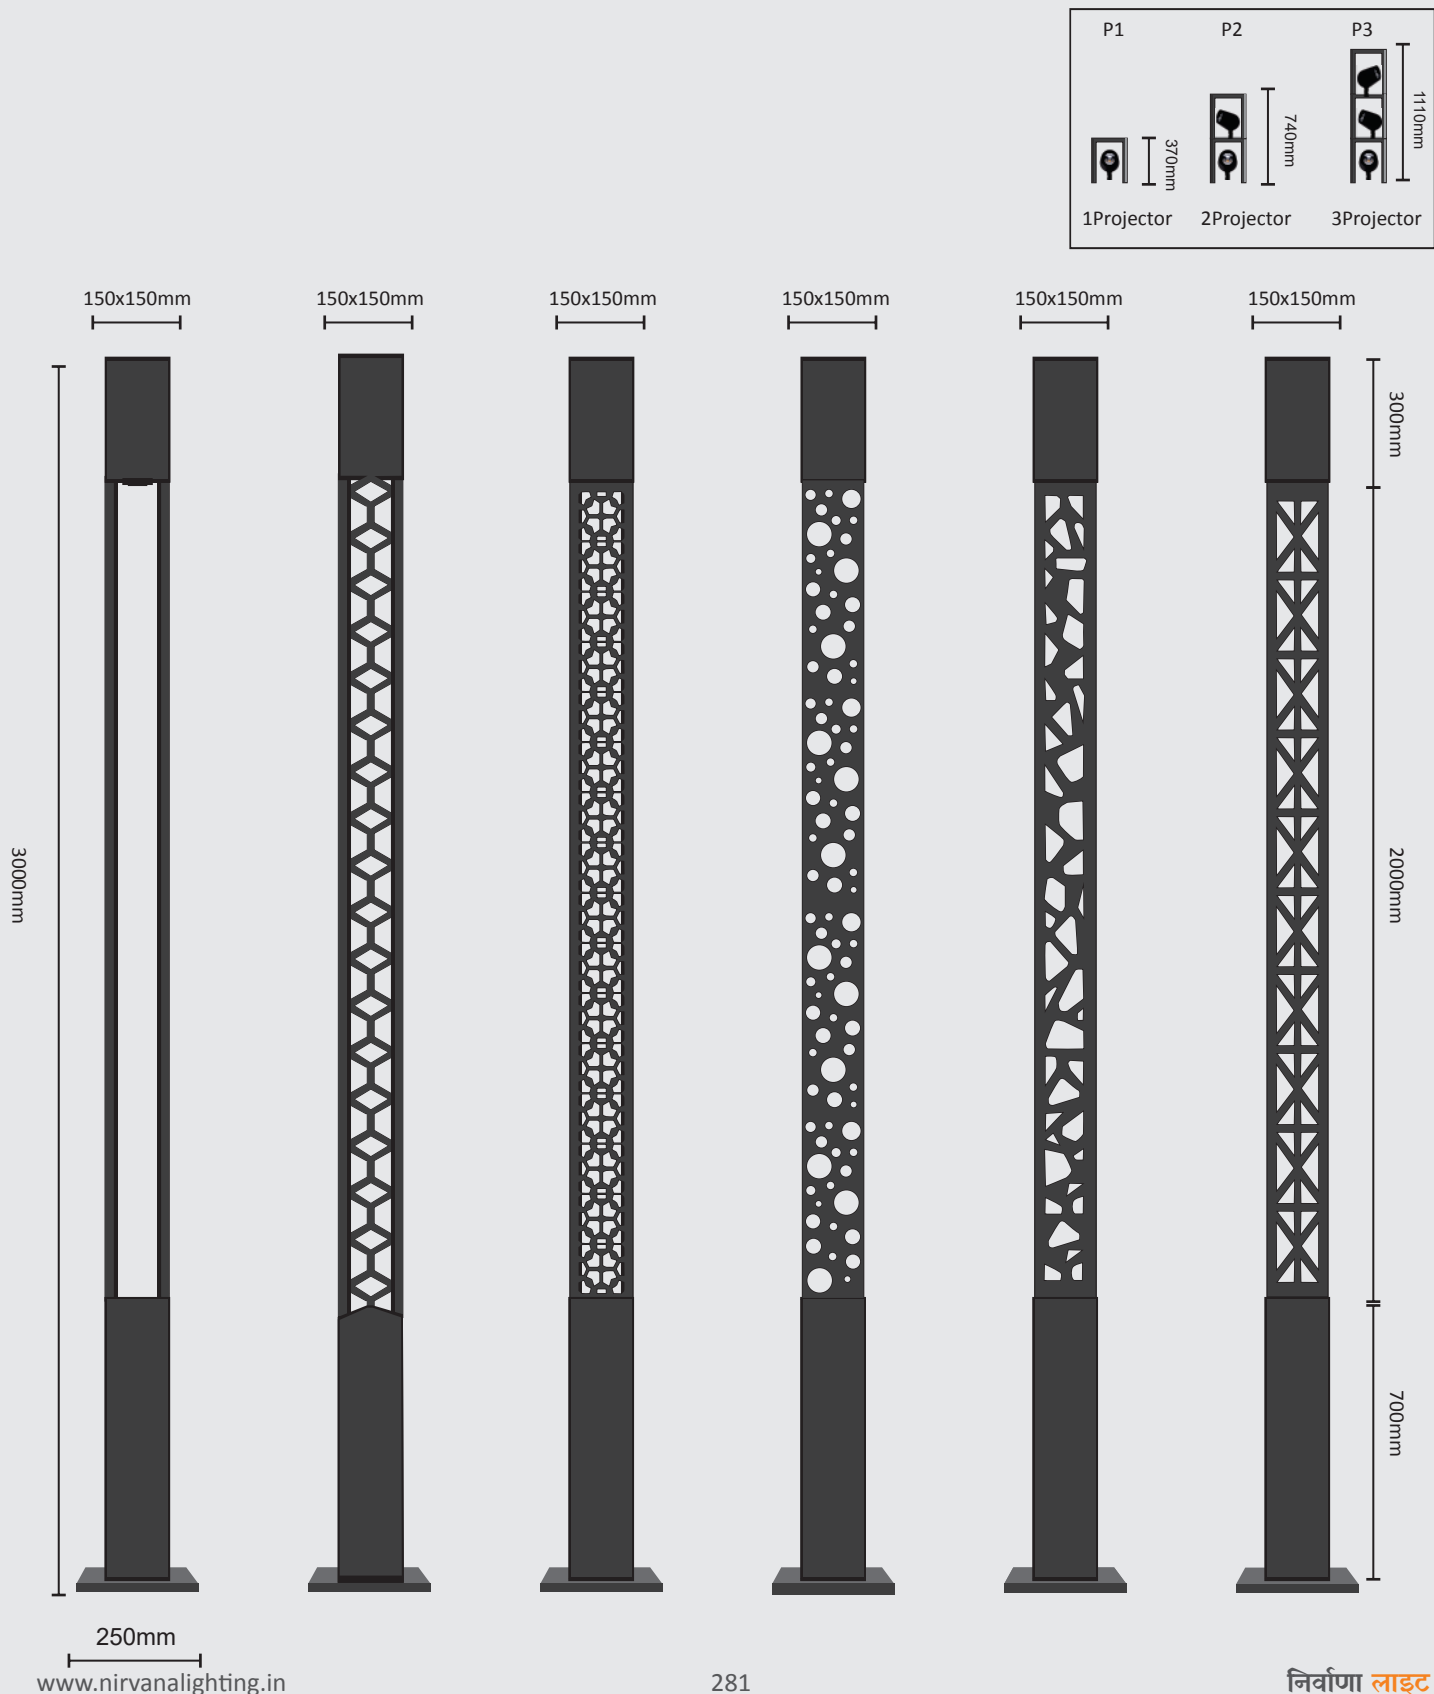


Design - Laser Cut -200x200


NL 4462-200-ST height 3 mtr	NL 4462-200-LD1 height 3 mtr	NL 4462-200-LD2 height 3 mtr	NL 4462-200-LD3 height 3 mtr	NL 4462-200-LD4 height 3 mtr	NL 4462-200-LD5 height 3 mtr
--------------------------------	---------------------------------	---------------------------------	---------------------------------	---------------------------------	---------------------------------

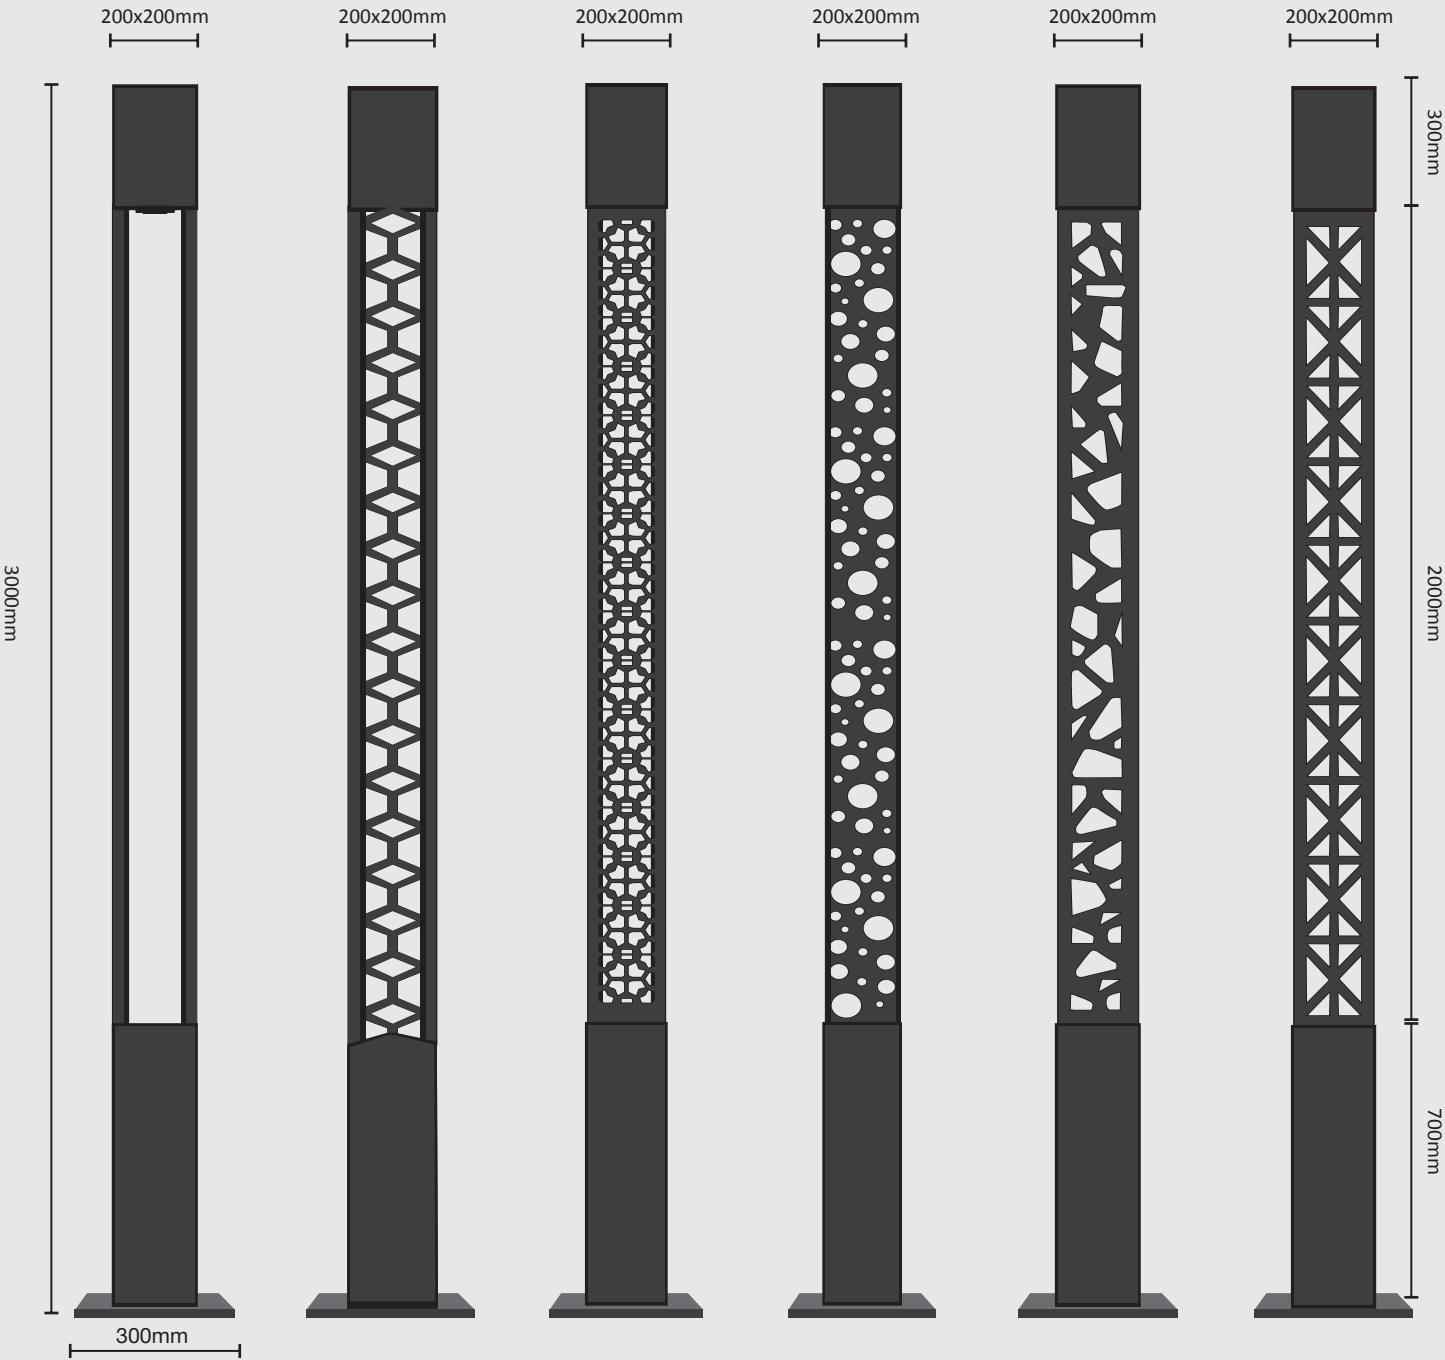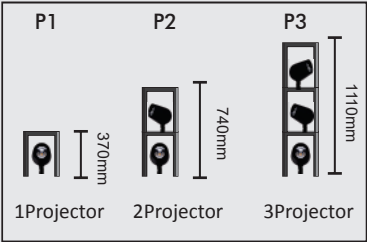

DIMENSION

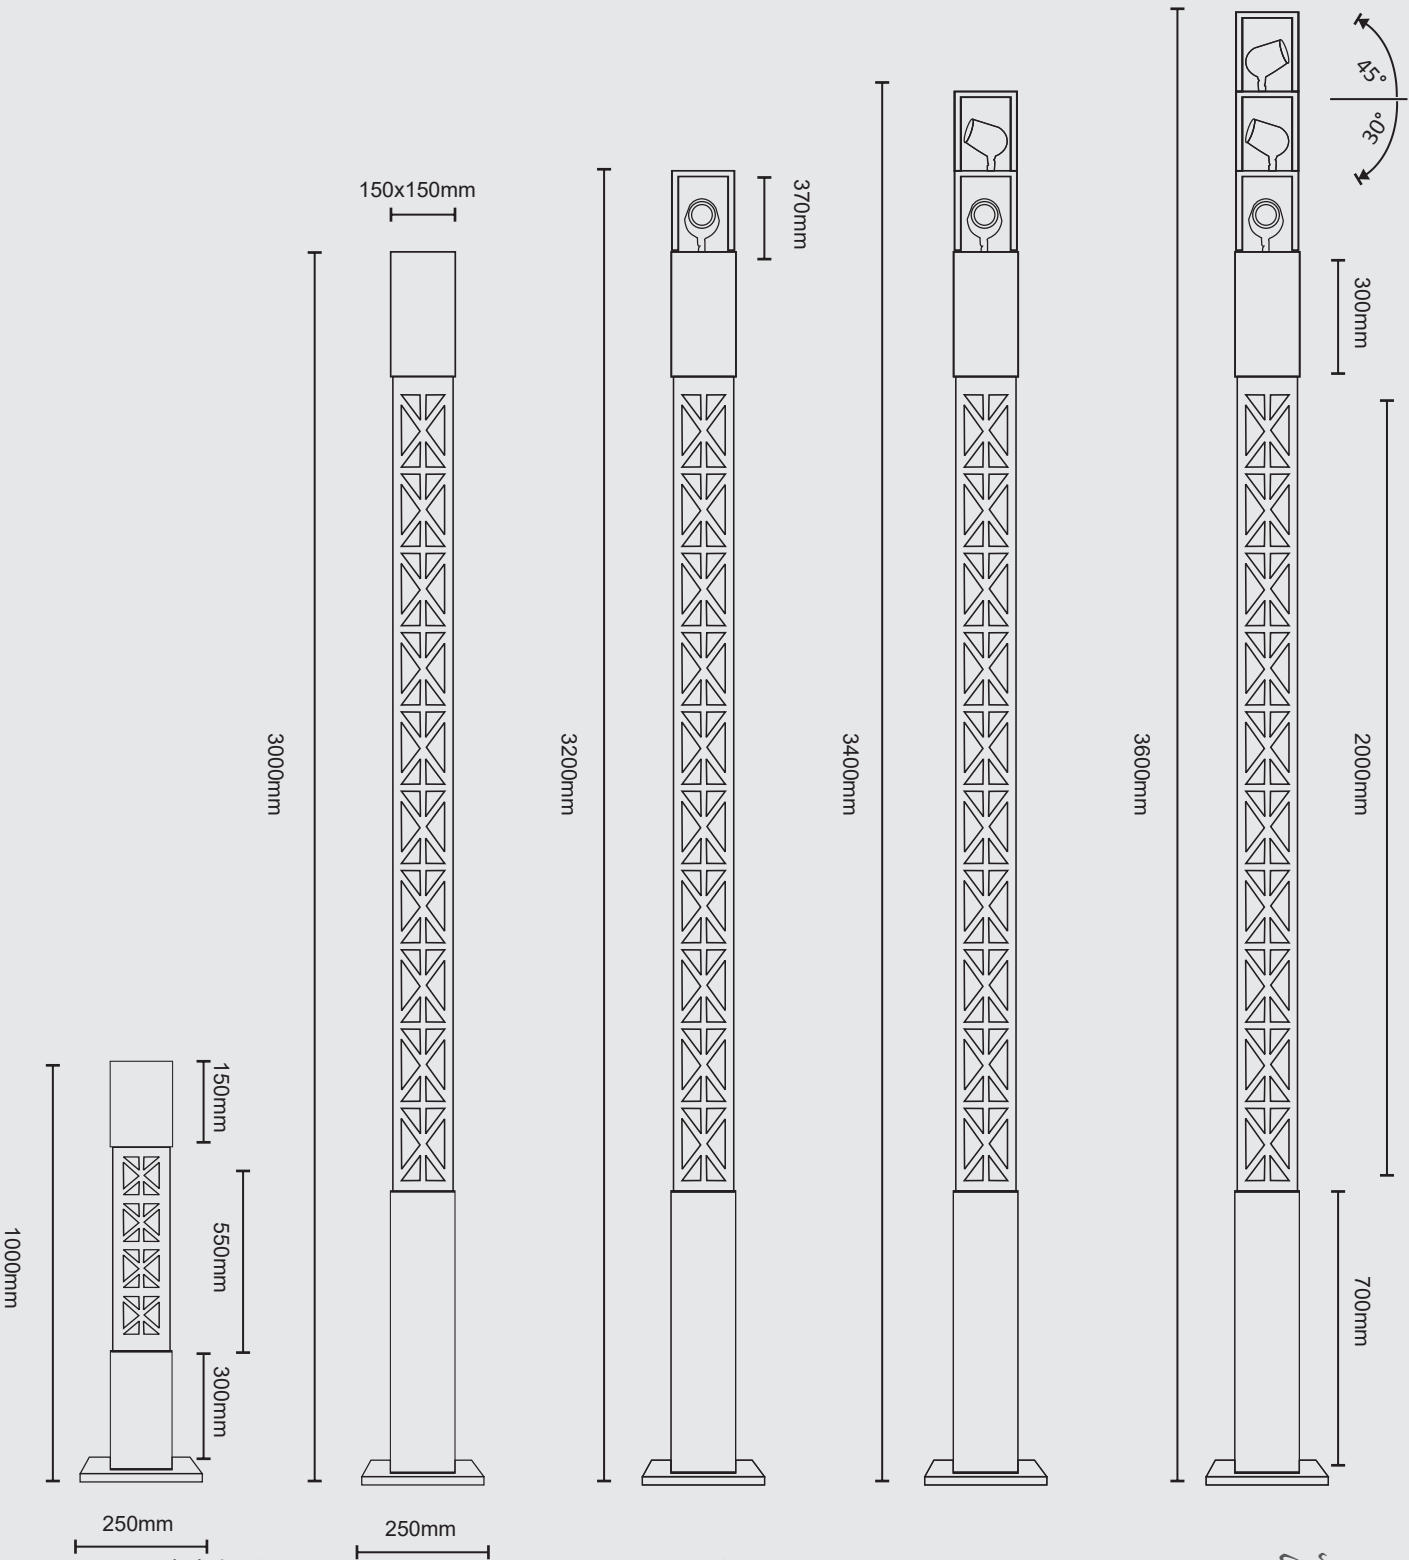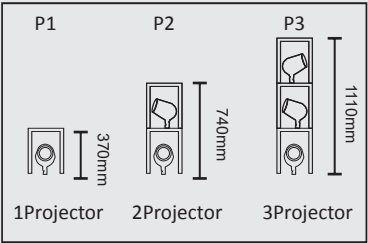

TECHNICAL DETAILS

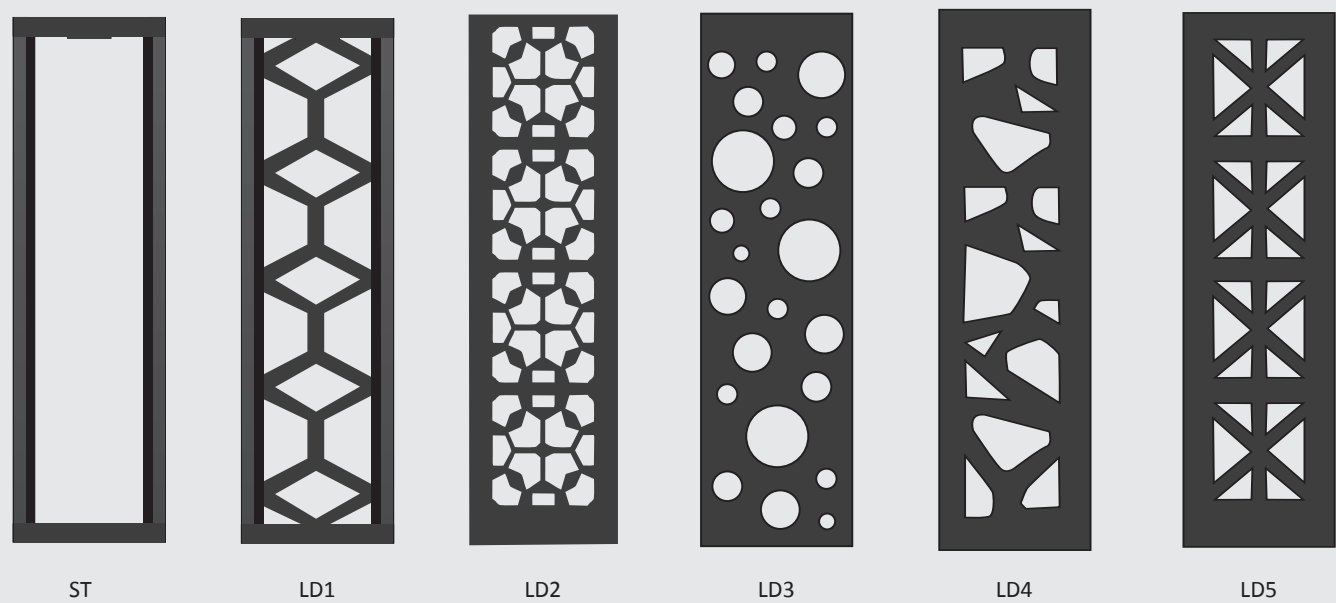

Customized Design Available



Specification (bollard)	
LED	OSRAM
POWER	15W/25W
CCT(K)	3000K/4000K/6000K
CRI	≥80
BEAM ANGLE	DIFFUSED
LUMINAIRE BODY	GI
OPTICS	PMMA CLEAR OPTIC LENSES
HOUSING COLOR	BLACK/DARK GREY
INPUT	220-240V AC
POWER FACTOR	>0.9
IP	IP65
CONTROL & DIMMING	ON-OFF
DIMENSION	150X150
BOLLARD HEIGHT	1Mtr
WORKING TEMP	-20°C ~ 50°C




Specification (pole)		
LED	OSRAM	OSRAM
POWER	25W/35W/50W	25W/35W/50W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80	≥80
BEAM ANGLE	DIFFUSED	DIFFUSED
LUMINAIRE BODY	GI	GI
OPTICS	PMMA CLEAR OPTIC LENSES	
HOUSING COLOR	BLACK/DARK GREY	BLACK/DARK GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP	IP65	IP65
CONTROL & DIMMING	ON-OFF	ON-OFF
DIMENSION	150X150	200X200
POLE HEIGHT	3Mtr	3Mtr
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C

Projector

NEO-N 65
65MM - 3/6W
510 lm
3K/4K/6K

NEO-N 95
95mm - 8/20W
2000 lm
3K/4K/6K

NEO-N 140
140mm - 20/60W
4000 lm
3K/4K/6K

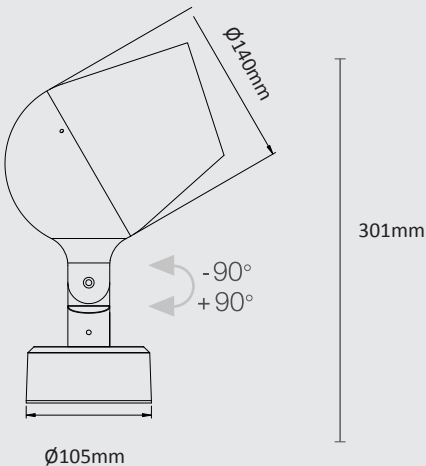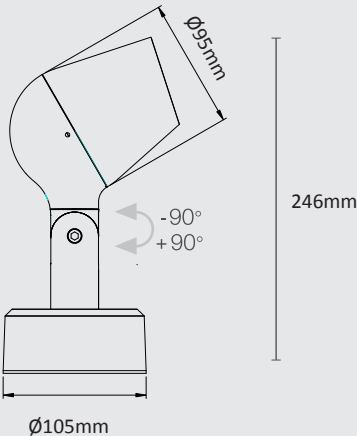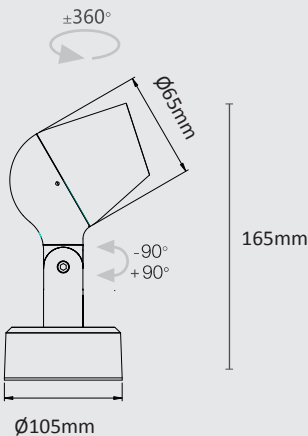

HOW TO ORDER USING PRODUCT CODE


Product	Size	Design	Single projector	Dual projector	Triple projector	Code
Bollard (1Mtr)	150	ST	×	×	×	4461-150-ST
		LD1 LD2/LD3/ LD4/LD5	×	×	×	4461-150-LD1 LD2/LD3/ LD4/LD5
Pole (3Mtr)	150	ST	×	×	×	4462-150-ST
		LD1 LD2/LD3/ LD4/LD5	×	×	×	4462-150-LD1 LD2/LD3/ LD4/LD5
Pole (3Mtr)	200	ST	×	×	×	4463-200-ST
		LD1 LD2/LD3/ LD4/LD5	×	×	×	4463-200-LD1 LD2/LD3/ LD4/LD5
Pole (3Mtr)	150/200	ST	✓	×	×	4462-150/200-ST-P1
		LD1 LD2/LD3/ LD4/LD5	✓	×	×	4462-150/200-LD1-P1 LD2/LD3/ LD4/LD5
Pole (3Mtr)	150/200	ST	✓	✓	×	4462-150/200-ST-P2
		LD1 LD2/LD3/ LD4/LD5	✓	✓	×	4462-150/200-LD1-P2 LD2/LD3/ LD4/LD5
Pole (3Mtr)	150/200	ST	✓	✓	✓	4462-150/200-ST-P3
		LD1 LD2/LD3/ LD4/LD5	✓	✓	✓	4462-150/200-LD1-P3 LD2/LD3/ LD4/LD5

* NL 4461= Bollard Series
NL 4462= Pole 150x150 Series
NL 4463= Pole 200x200 Series

150x150 = Pole Size
200x200 = Pole Size

ST= Stud
LD= Laser Design


P1= Pole with 1 Projector
P2= Pole with 2 Projector
P3= Pole with 3 Projector







Outdoor Architectural Lighting

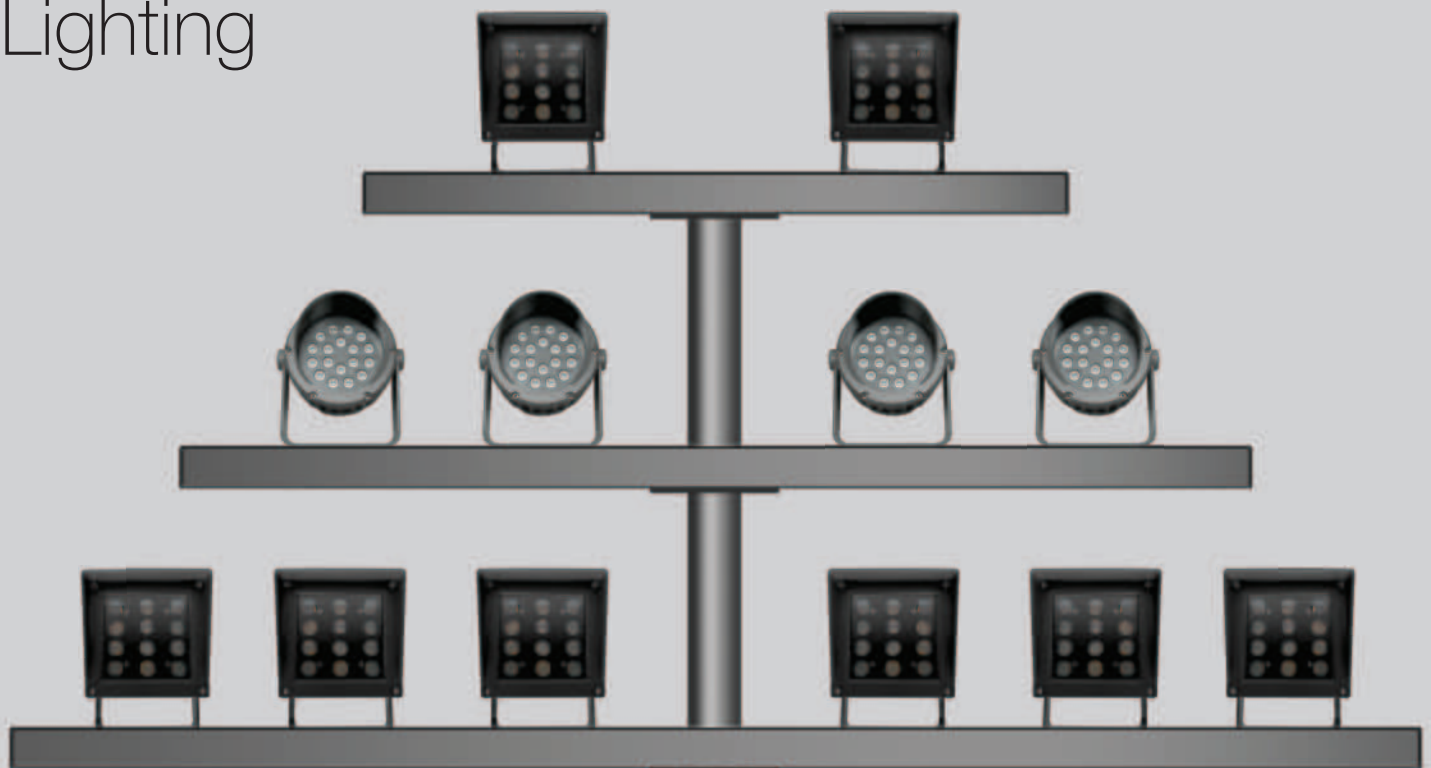

Facade Lighting System

ACADE - Lighting System Aluminium Housing with High Corrosion Resistance: Constructed from aluminium, the housing offers excellent resistance to corrosion, ensuring durability and performance in outdoor environments. Stone Wash Surface Treatment: The surface undergoes a stone wash treatment before painting, enhancing the finish and durability of the fixture. Glare-Free Illumination: Provides glare-free lighting to ensure comfortable and effective illumination of the ground surface.

FACADE

Lighting System

Features

- Aluminum extruded Die cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.


Applications

- Entrances
- Malls
- Theaters
- Malls
- Public Areas
- Sculptures and Monuments
- Compound Periphery



FLD - S1

FLD - S2

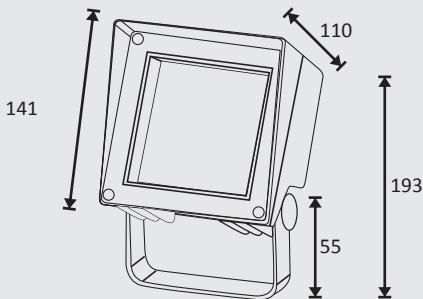

Specification		
MODEL	NL-FLD-S1	NL-FLD-S2
LED	OSRAM	OSRAM
POWER	20W/30W	45W/60W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥80/90	≥80/90
BEAM ANGLE	5°/30°/40°/60°/90°/120°	5°/30°/40°/60°/90°/120°
LUMINAIRE BODY	ALUMINUM BODY+	ALUMINUM BODY+
OPTICS	TOUGHENED CLEAR GLASS	TOUGHENED CLEAR GLASS
HOUSING COLOR	BLACK/GREY	BLACK/GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP	IP65	IP65
CONTROL & DIMMING	NON DIMMING	NON DIMMING
HEAD DIMENSION	141X110X193MM	240X157X307MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-40°C ~ 55°C	-40°C ~ 55°C

FACADE

Lighting System

Features

- Aluminum extruded Die cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners.
- Pre-Wired Cable Gland with IP67 Rating
- Silicon gasket.


Applications

- Entrances
- Malls
- Theaters
- Malls
- Public Areas
- Sculptures and Monuments
- Compound Periphery



FLD - R1

FLD - R2



Specification		
MODEL	NL-FLD-R1	NL-FLD-R2
LED	OSRAM	OSRAM
POWER	24W/36W	54W/72W
CCT(K)	3000K/4000K/6000K	3000K/4000K/6000K
CRI	≥ 90	≥ 90
BEAM ANGLE	5°/30°/40°/60°/90°/120°	5°/30°/40°/60°/90°/120°
LUMINAIRE BODY	ALUMINUM BODY+	ALUMINUM BODY+
OPTICS	TOUGHENED CLEAR GLASS	TOUGHENED CLEAR GLASS
HOUSING COLOR	BLACK/GREY	BLACK/GREY
INPUT	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9
IP	IP65	IP65
CONTROL & DIMMING	NON DIMMING	NON DIMMING
HEAD DIMENSION	235x260MM	265x290MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-40°C ~ 55°C	-40°C ~ 55°C




Outdoor Architectural Lighting

Street Lighting System

Various Sizes and Power Options: Available in different sizes and power levels to accommodate a wide range of lighting requirements. **Optical Elements:** Equipped with advanced optical elements to meet diverse lighting needs, including area lighting, facade lighting, and other specific applications. **Adjustable Power and Color Temperature:** Capable of providing sufficient power and adjustable color temperatures to suit different environments and lighting requirements. **Aluminium Body:** Features a robust aluminium housing that offers excellent durability and resistance to corrosion, ensuring long-term performance. **Steel Mounting:** Includes a steel mounting system for secure and stable installation.



Bubble Level for Alignment

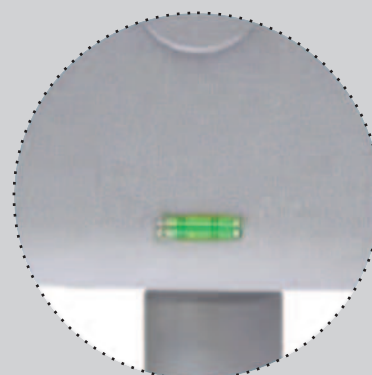


Street Lighting System

Features

- Aluminum extruded Die cast body
- Hi-power SMD LED for extra wide angle.
- Non-corrosive SS fasteners.
- Product supplied pre-wired cable gland compliance to IP67 rating
- Silicon gasket.

Applications

- Street Lighting
- Roadways
- Expressways
- Malls
- Stadium
- Courtyards
- Public area lighting like parks & Squares.





NL - 4477

NL - 4478



NL - 4479

NL - 4480



Specification				
Model	NL 4477	NL 4478	NL 4479ram	NL 4480
LED	Osram	Osram	Osram	Osram
POWER	50W	100W	150W	200W
CCT(K)	27K/3K/4K/5K/6K/65K	27K/3K/4K/5K/6K/65K	27K/3K/4K/5K/6K/65K	27K/3K/4K/5K/6K/65K
CRI	≥70	≥70	≥70	≥70
BEAM ANGLE	70X140°	70X140°	70X140°	70X140°
LUMINAIRE BODY	ALUMINUM BODY	ALUMINUM BODY	ALUMINUM BODY	ALUMINUM BODY
LUMEN	130lm/W	130lm/W	130lm/W	130lm/W
HOUSING COLOR	GREY	GREY	GREY	GREY
INPUT	220-240V AC	220-240V AC	220-240V AC	220-240V AC
POWER FACTOR	>0.9	>0.9	>0.9	>0.9
IP RATING	IP65	IP65	IP65	IP65
CONTROL & DIMMING	On-Off	On-Off	On-Off	On-Off
HEAD DIMENSION	470X180X110MM	560X240X115MM	690X280X130MM	740X280X130MM
POLE HEIGHT	3M/4M/5M/6M	3M/4M/5M/6M	3M/4M/5M/6M	3M/4M/5M/6M
WORKING TEMP	-20°C ~ 50°C	-20°C ~ 50°C	-20°C ~ 50°C	-20°C ~ 50°C

Poles

Lighting System



D:60MM



D:76MM



D:89MM




D:100MM



D:114MM

Poles

Lighting System

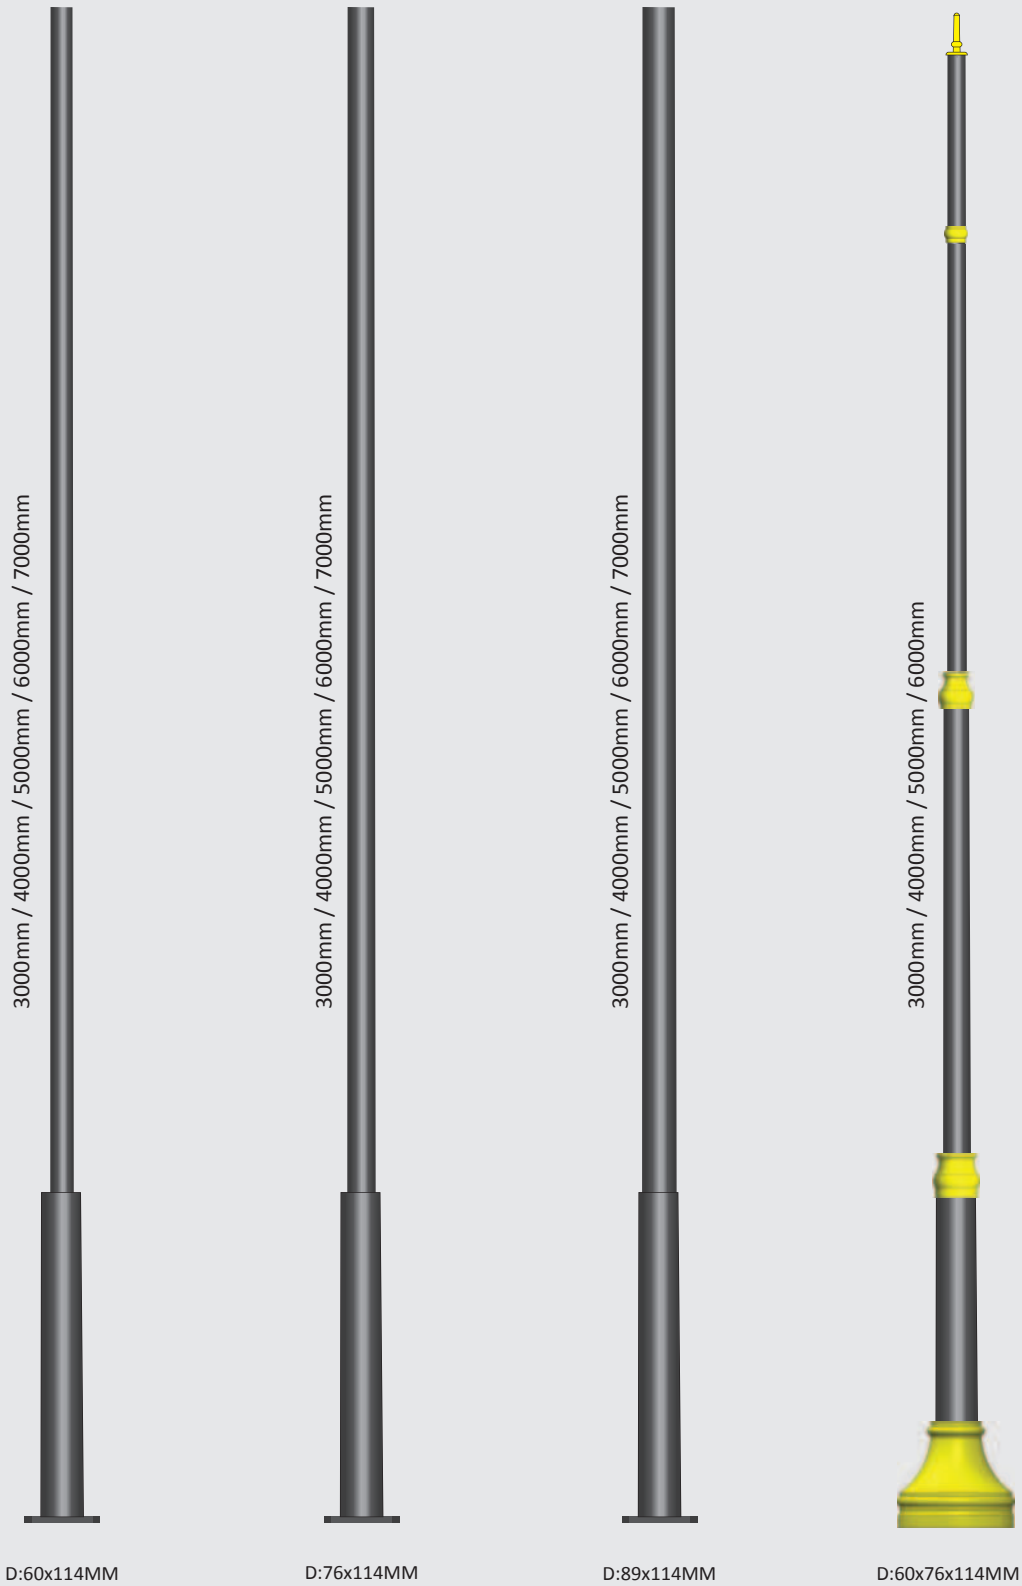

“In the midst of darkness, light persists.”
— *Mahatma Gandhi*

“Don’t fight darkness—bring the light, and darkness will disappear.”
— *Maharishi Mahesh Yogi*

“Darkness cannot drive out darkness; only light can do that.
Hate cannot drive out hate; only love can do that.”
— *Martin Luther King, Jr.*


“It is better to light a candle than curse the darkness.”
— *Eleanor Roosevelt*
(inspired by ancient Indian proverb, often attributed to *Swami Vivekananda*)

“Give light, and the darkness will disappear of itself.”
— *Desiderius Erasmus*

“You have to find what sparks a light in you so that
you in your own way can illuminate the world.”
— *Oprah Winfrey*

“There are two kinds of light—the glow that illuminates,
and the glare that obscures.”
— *James Thurber*

Architectural Lighting Solutions

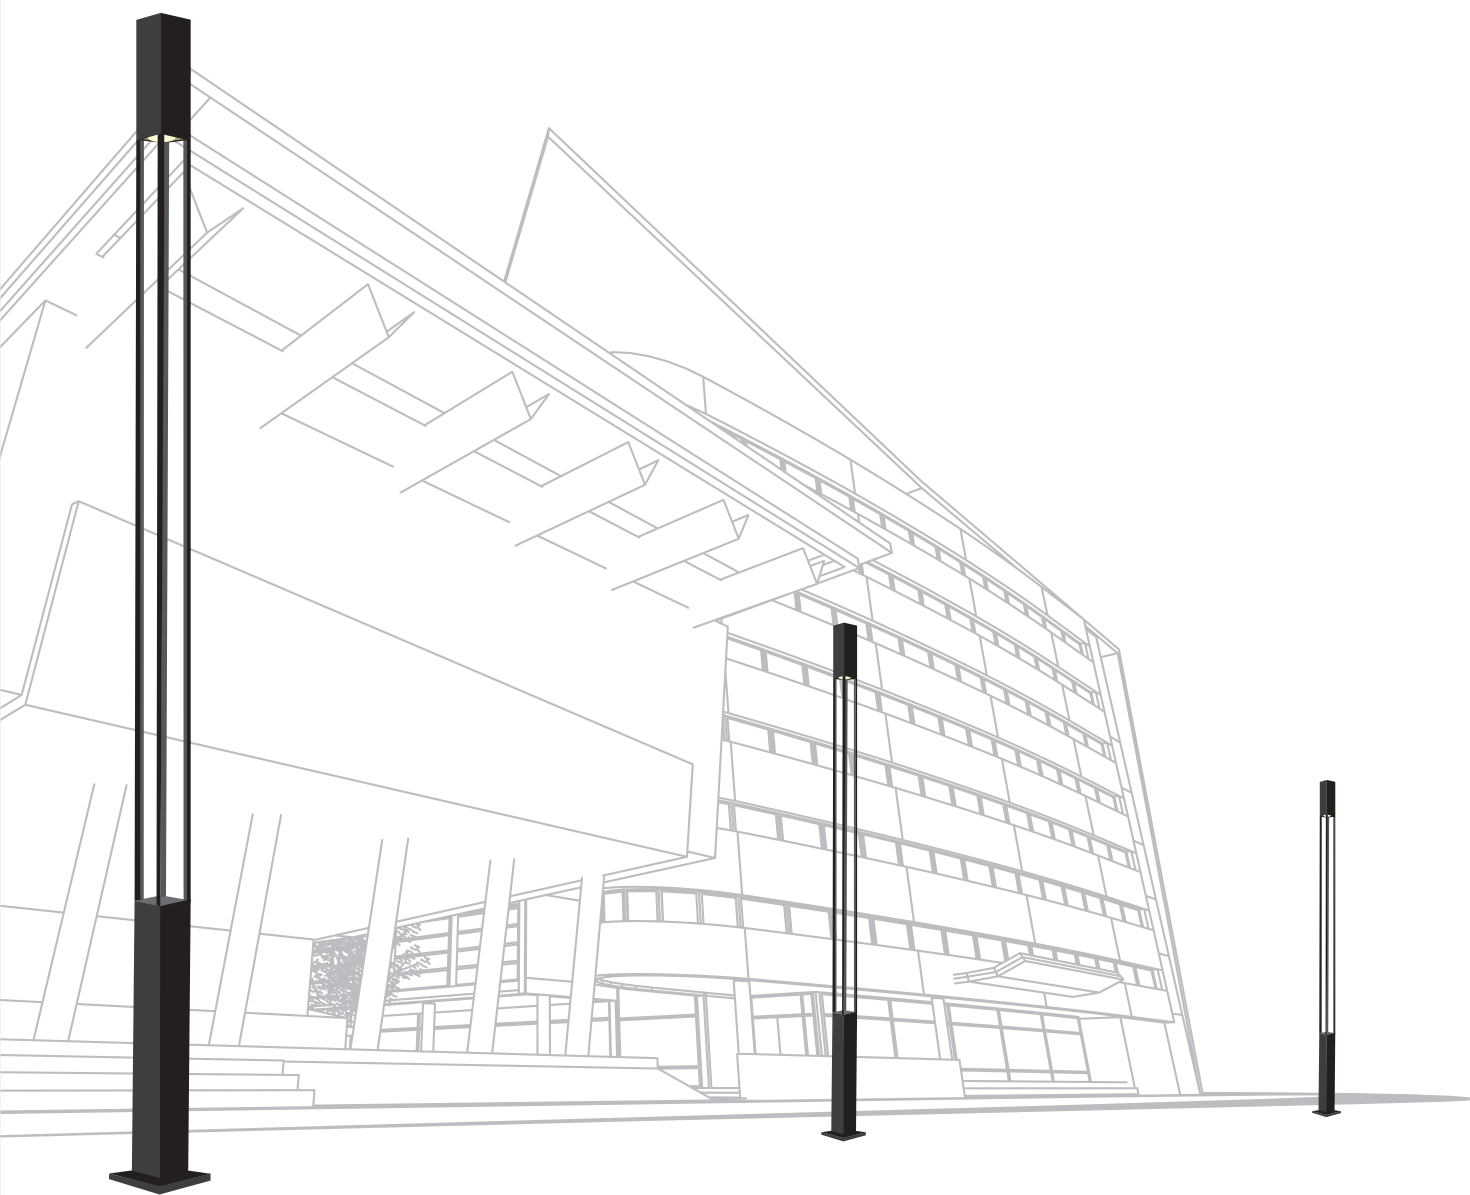

Regd. Office :

1301, Synergy Business Park,
Sahakar Wadi,
Near Synthofine Industrial Estate,
Goregaon (E), Mumbai-400063.

Factory :

A/52-61, Royal Ind. Hub,
Bhiwandi-Kaman Road,
Vasai (East)-401208,
Dist. Palghar, Maharashtra.

Tel.: +91 22 49696903

+91 93723 79819

Email : sales5@nirvanalighting.in

Web.: www.nirvanalighting.in